

Issue 9

Industrial Door & Dock Loading Components

Sectional Door Panels

Sectional Door Components

Roller Shutter Lath & Components

High Speed Door Curtains & Components

Dock Levellers & Ramps

Dock Shelters

Loading Bay Components, Wheel Guides & Bollards

Motors & Manual Operation

Electrical Components & Accessories

General Fixings

Indupart Information



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



Raising Standards Safety Assured

Indupart Information

Sectional Door Panels

Panel 1 - 'W' Plastisol	5, 7 - 11	Panel 26 & 27 - 'N9000F'	62 - 63
Panel 2 - 'W' Polyester	6, 7 - 11	Panel 28 - 'H400' (500mm)	64 - 65
Panel 3 - 'W-FS'	12 - 13	Panel 29 - 'H400' (625mm)	66 - 67
Panel 4 - 'W-80'	14 - 15	Panel 30 - 'R' (500mm)	68 - 69
Panel 5 & 6 - 'C'	16 - 17	Panel 31 - 'H' (625mm)	70 - 71
Panel 7 & 34 - 'CM'	18 - 19	Panel 32 - 'H400' (750mm)	72 - 73
Panel 8 & 9 - 'N' (500mm)	20 - 22	Panel 33 - 'E-Type'	74 - 76
Panel 10 & 11 - 'N' (600mm)	24 - 26		
Panel 12 - 'N9000'	28 - 30	Sectional Door Components	
Panel 13 - 'N8'	32 - 33	Seals, Retainers & Adaptors	79 - 85
Panel 15 - 'K'	34 - 35	Top Brackets, Bottom Brackets & Components	86 - 92
Panel 16 - 'T'	36 - 37	Roller Brackets	93 - 95
Panel 17 - 'H' (500mm)	38 - 39	Intermediate Hinges & Connecting Plates	96 - 98
Panel 18 - 'H' (750mm)	40 - 41	Rollers	99 - 102
Panel 19 - 'W-RIB'	42 - 44	Thermal Safe	103 - 106
Panel 20 - 'NF' (625mm)	46 - 47	Bracing Bars	107 - 108
Panel 21 - 'NF' (500mm)	48 - 49	Windows & Footsteps	109 - 113
Panel 22 - 'H20'	50 - 51	Wickets Doors & Hardware	114 - 121
Panel 23 - 'K44'	52 - 54	Wicket Door Handles & Locks	122 - 126
Panel 24 - 'W'	56 - 58	Springs	127 - 130
Panel 25 - 'R' (610mm)	60 - 61	Spring Accessories	131 - 134
		Drums, Cables & Components	135 - 149



Shafts, Couplings, Key Steels, Adaptors & Components	150 - 156
Bearings & Bearing Plates	157 - 160
Spring Brake Devices & Components	161 - 163
Pusher Springs & Mounting Plates	164 - 165
Tracks, Angles & Components	166 - 171
Low Level Consoles	172 - 174

Roller Shutter Lath & Components

Standard Lath & Endlocks	177 - 179
Insulated Lath & Endlocks	180 - 181
Bottom Rails, Seals & Retainers	182 - 184
Guides & Angles	185 - 188
Bearings, Sprockets & Components	189 - 192
Wickets Doors, Locks & Lock Components	193 - 195
End Plates	196
Barrel Tubes & General Steel	197
Fusible Links & Components	198 - 199

High Speed Door Curtains & Components

ALBANY Parts	202 - 208
IPR Parts	209 - 219

Dock Levellers & Ramps

Dock Leveller Parts & Ramps	221 - 227
-----------------------------	------------------

Dock Shelters

Dock Shelters	229 - 232
---------------	------------------

Loading Bay Components, Wheel Guides & Bollards

Loading Bay Components	235 - 237
Wheel Guides	238
Bollards	239

Motors & Manual Operation

Motors & Manual Operation	241 - 250
---------------------------	------------------

Electrical Components & Accessories

Electrical Components & Accessories	253 - 276
-------------------------------------	------------------

General Fixings

General Fixings	279 - 284
-----------------	------------------


Indupart Information

Depot Addresses	287
Depot Map	288
How To Order	289
Payment Options	290
FAQs	291

Sectional Door Panels

Pages **5 - 76**

Panel No. & Name	Page	Panel No. & Name	Page
1 - 'W' Platisol	5, 7-11	19 - 'W-RIB'	42-44
2 - 'W' Polyester	6, 7-11	20 - 'NF' (625mm)	46-47
3 - 'W-FS'	12-13	21 - 'NF' (500mm)	48-49
4 - 'W-80'	14-15	22 - 'H20'	50-51
5 & 6 - 'C'	16-17	23 - 'K44'	52-54
7 & 34 - 'CM'	18-19	24 - 'W'	56-58
8 & 9 - 'N' (500mm)	20-22	25 - 'R' (610mm)	60-61
10 & 11 - 'N' (600mm)	24-26	26 & 27 - 'N9000F'	62-63
12 - 'N9000'	28-30	28 - 'H400' (500mm)	64-65
13 - 'N8'	32-33	29 - 'H400' (625mm)	66-67
15 - 'K'	34-35	30 - 'R' (500mm)	68-69
16 - 'T'	36-37	31 - 'H' (625mm)	70-71
17 - 'H' (500mm)	38-39	32 - 'H400' (750mm)	72-73
18 - 'H' (750mm)	40-41	33 - 'E-Type'	74-76



'W' Kingspan Panel | 610mm Deep

Description: Insulated sectional door panel

Material: Steel

Size: 610mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Outside Face: Steel with a XL200 plastisol finish in a wide range of colours



See page 10/11 for colour charts

We can spray any RAL / BS Colour



See pages 7/8 for parts
Suitable for this panel



Plastisol Colours Available - 610mm High

Azure Blue (Ocean) - BS 18C39
3050mm / 4050mm / 5050mm / 6100mm long
Cornflower Blue (Solent) - BS 18E53
3050mm / 4050mm / 5050mm / 6100mm long
Flame Red (Poppy) - BS 04E53
3050mm / 4050mm / 5050mm / 6100mm long
Goosewing Grey - BS 10A05
3050mm / 4050mm / 5050mm / 6100mm long
Khaki Green (Moorland) - BS 12B21
3050mm / 4050mm / 5050mm / 6100mm long
Leaf Green (Heritage) - RAL 6002
3050mm / 4050mm / 5050mm / 6100mm long

Merlin Grey - BS 18B25
3050mm / 4050mm / 5050mm / 6100mm long
Olive Green - BS 12B27
3050mm / 4050mm / 5050mm / 6100mm long
Sapphire Blue (Sargasso) - RAL 5003
3050mm / 4050mm / 5050mm / 6100mm long
Sunflower Yellow (Aztec) - BS 10E55
3050mm / 4050mm / 5050mm / 6100mm long
Van Dyke Brown - BS 08B29
3050mm / 4050mm / 5050mm / 6100mm long


Plastisol Colours Available - 500mm High

Anthracite - RAL 7016
3050mm / 4050mm / 5050mm / 6100mm long
Gull Grey - BS 18B17
3050mm / 4050mm / 5050mm / 6100mm long

Juniper Green - BS 12B29
3050mm / 4050mm / 5050mm / 6100mm long
Mushroom - BS 10B19
3050mm / 4050mm / 5050mm / 6100mm long

Please note: The colours reproduced here are offered as a guide only.

It is possible that the finished product may be slightly different from those illustrated on this document.



'W' Kingspan Panel | 610mm Deep

Description: Insulated sectional door panel

Material: Steel

Size: 610mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Outside Face: Stucco embossed steel with a polyester finish in a wide range of colours



See page 10/11 for additional colours

We can spray any RAL / BS Colour



See page 7/8 for parts Suitable for this panel

Polyester Colours Available

Anthracite - RAL 7016plus

3050mm / 4050mm / 5050mm / 6100mm long

Bone White (Grey) - RAL 9002

3050mm / 4050mm / 5050mm / 6100mm long

Fir Green - RAL 6009

3050mm / 4050mm / 5050mm / 6100mm long

Gentian Blue - RAL 5010

3050mm / 4050mm / 5050mm / 6100mm long

Grey Aluminium - RAL 9007plus

3050mm / 4050mm / 5050mm / 6100mm long

Black - RAL 9005

3050mm / 4050mm / 5050mm / 6100mm long

Ivory - RAL 1015

3050mm / 4050mm / 5050mm / 6100mm long

Sepia Brown - RAL 8014

3050mm / 4050mm / 5050mm / 6100mm long

Silver - RAL 9006plus

3050mm / 4050mm / 5050mm / 6100mm long

Sunset Red - RAL 3000

3050mm / 4050mm / 5050mm / 6100mm long

White - RAL 9010

3050mm / 4050mm / 5050mm / 6100mm long

Please note: The colours reproduced here are offered as a guide only.

It is possible that the finished product may be slightly different from those illustrated on this document.




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk




201010

Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W' Kingspan 610mm




201011

Extra Wide End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W' Kingspan 610mm



202010

Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W' Kingspan 610mm




202015

Wicket Door Bottom End Cassette (Extra Wide)

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W' Kingspan 610mm



202120

Extended Length End Cassette

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'W' Kingspan 610mm



204013	3050mm
204014	4050mm
204009	5050mm
204010	6100mm

2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'W' Kingspan 610mm



204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'W' Kingspan 610mm




204060

Stepped Multi Adaptor

Material: Aluminium
Unit: Piece (1)
Length: 6000mm



Suitable for:
Panel: 'W' Kingspan 610mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre




Suitable for:
Panel: 'W' Kingspan 610mm

208015

Safety Edge

(Extra Deep)




Standard Edge

208011**Black Rubber Bottom Seals**

Material: EPDM
Unit: Linear Metre




Suitable for:
 Panel: ‘W’ Kingspan 610mm

**301010****Adjustable Side Hinge**

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
 Panel: ‘W’ Kingspan 610mm

**208013****Black Rubber Bottom Seal (NEW)**

Material: EPDM
Unit: Linear Metre



Suitable for:
 Panel: ‘W’ Kingspan 610mm

**306010****Intermediate Hinge**

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
 Panel: ‘W’ Kingspan 610mm





Did you know?

You can find *Technical Specifications* on our website



Plastisol Colour Chart

Kingspan XL Forté



All backs of panels are White RAL 9010 Stucco Embossed



White
RAL 9010

Plastisol 610mm Colours

These colours are only available in **610mm Deep Panels**.



Sunflower Yellow (Aztec)
BS 10E55



Flame Red (Poppy)
BS 04E53



Sapphire Blue (Sargasso)
RAL 5003



Khaki Green (Moorland)
BS 12B21



Olive Green
BS 12B27



Leaf Green (Heritage)
RAL 6002



Van Dyke Brown
BS 08B29



Goosewing Grey
BS 10A05



Merlin Grey
BS 18B25



Cornflower Blue (Solent)
BS 18E53



Azure Blue (Ocean)
BS 18C39

Plastisol 500mm Colours

These colours are only available in **500mm Deep Panels**.




Juniper Green
BS 12B29



Gull Grey
BS 18B17



Mushroom
BS 10B19



Anthracite
RAL 7016



Please note: The colours reproduced here are offered as a guide only.

It is possible that the finished product may be slightly different from those illustrated on this document.



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

Polyester Colour Chart

Kingspan Polyester



All backs of panels are White RAL 9010 Stucco Embossed



White
RAL 9010

These colours are only available in **610mm Deep Panels**.



Sunset Red
RAL 3000



Sepia Brown
RAL 8014



Gentian Blue
RAL 5010



Fir Green
RAL 6009



Anthracite
RAL 7016plus



Ivory
RAL 1015



Bone White (Grey)
RAL 9002



Grey Aluminium
RAL 9007plus



Silver
RAL 9006plus



White
RAL 9010




Black
RAL 9005



Please note: The colours reproduced here are offered as a guide only.

It is possible that the finished product may be slightly different from those illustrated on this document.



'W-FS' Kingspan Panel | 610mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel

Size: 610mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Outside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Lengths Available

Steel

101013-FS	3050mm long
101014-FS	4050mm long
101015-FS	5050mm long
101016-FS	6100mm long



We can spray any RAL / BS Colour



See page 13 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201009

Intermediate End Cassette - Fingersafe

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W-FS' Kingspan 610mm



201013

Extra Wide End Cassette - Fingersafe

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W-FS' Kingspan 610mm



202009

Bottom End Cassette - Fingersafe

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W-FS' Kingspan 610mm



204013	3050mm
204014	4050mm
204009	5050mm
204010	6100mm

2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'W-FS' Kingspan 610mm




204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'W-FS' Kingspan 610mm



206011

Black Rubber Top Seal


Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'W-FS' Kingspan 610mm

208015

Safety Edge (Extra Deep)



Standard Edge


208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'W-FS' Kingspan 610mm




301035

Adjustable Side Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'W-FS' Kingspan 610mm




306014

Intermediate Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'W-FS' Kingspan 610mm



'W-80' Kingspan Panel | 610mm Deep

Description: Insulated sectional door panel

Material: Steel

Size: 610mm high x 80mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Outside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Lengths Available Steel

101001	5100mm long
101000	9100mm long
101002	13200mm long



We can spray any RAL / BS Colour



See page 15 for parts
Suitable for this panel




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201005

End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
 Panel: 'W-80' Kingspan 610mm




201008

Extra Wide End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
 Panel: 'W-80' Kingspan 610mm



204016

Double Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
 Panel: 'W-80' Kingspan 610mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
 Panel: 'W-80' Kingspan 610mm




208016

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Order (2): If ordering 204016
 double bottom seal retainer
Suitable for:
 Panel: 'W-80' Kingspan 610mm



301010

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
 Panel: 'W-80' Kingspan 610mm



306010


Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
 Panel: 'W-80' Kingspan 610mm





Lengths Available

Steel (5)

100213	3050mm long
100214	4050mm long
100215	5050mm long
100216	6200mm long
100218	8300mm long

Aluminium (6)

100203	3050mm long
100204	4050mm long
100205	5050mm long
100206	6200mm long
100208	8300mm long

Type 'C' Panel | 500mm Deep

Description: Insulated sectional door panel

Material: Steel (5) / Aluminium (6)

Size: 500mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel or aluminium

Outside Face: Stucco embossed steel or aluminium



We can spray any RAL / BS Colour



See page 17 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201002

Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'C' Panel 500mm



201004

Extra Wide Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'C' Panel 500mm



202012

Extra Wide Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'C' Panel 500mm



204013	3050mm
204014	4050mm
204009	5050mm
204010	6100mm

2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'C' Panel 500mm




204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'C' Panel 500mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'C' Panel 500mm

208015

Safety Edge (Extra Deep)



Standard Edge


208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'C' Panel 500mm




301000

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'C' Panel 500mm



306000

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'C' Panel 500mm



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



Type ‘CM’ Panel | 600mm Deep

Description: Insulated sectional door panel

Material: Steel / Aluminium

Size: 600mm high x 41mm thick

Steel (7):

Inside Face: Stucco embossed steel RAL 9002 light grey

Outside Face: Stucco embossed steel RAL 9006 silver

Aluminium (34):

Inside Face: Stucco embossed aluminium

Outside Face: Stucco embossed aluminium

Lengths Available

Steel (7)

100304 4100mm long

100308 8200mm long

Aluminium (34)

100314 4100mm long

100318 8200mm long



We can spray any RAL / BS Colour



See page 19 for parts
Suitable for this panel



0161 432 6655




sales@indupart.co.uk



www.indupart.co.uk



201006	202016	204005
Intermediate End Cassette Material: Galvanised Steel Unit: Pair (2)	Bottom End Cassette Material: Galvanised Steel Unit: Pair (2)	Top and Bottom Seal Retainer Material: Aluminium Unit: Piece (1) Length: 6100mm
 Suitable for: Panel: 'CM' Panel 600mm	 Suitable for: Panel: 'CM' Panel 600mm	 Suitable for: Panel: 'CM' Panel 600mm



206011	208011	301010
Black Rubber Top Seal Material: EPDM Unit: Linear Metre	Black Rubber Bottom Seals Material: EPDM Unit: Linear Metre	Adjustable Side Hinge Material: Galvanised Steel Unit: Pack (10)
 Suitable for: Panel: 'CM' Panel 600mm	 Suitable for: Panel: 'CM' Panel 600mm	 Suitable for: Panel: 'CM' Panel 600mm



306010
Intermediate Hinge Material: Galvanised Steel Unit: Pack (20)
 Suitable for: Panel: 'CM' Panel 600mm





Type ‘N’ Nassau Panel | 500mm Deep

Description: Insulated sectional door panel

Material: Steel (8) / Aluminium (9)

Size: 500mm high x 44mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel or aluminium

Outside Face: Stucco embossed steel or aluminium



We can spray any RAL / BS Colour

Lengths Available

Steel (8)

101006	6100mm long
---------------	-------------

Aluminium (9)

100003	3050mm long
---------------	-------------

100004	4050mm long
---------------	-------------

100005	5050mm long
---------------	-------------

100006	6100mm long
---------------	-------------

100008	8100mm long
---------------	-------------

100010	10050mm long
---------------	--------------



See pages 21/22 for parts
Suitable for this panel




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201000

Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N' Nassau 500mm




201012

Extra Wide Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N' Nassau 500mm




202000

Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N' Nassau 500mm



202020

Extended Length End Cassette

Material: Galvanised Steel
Unit: Piece (1)



Suitable for:
Panel: 'N' Nassau 500mm



204000

Top and Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'N' Nassau 500mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'N' Nassau 500mm



206000

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N' Nassau 500mm
Retainer: 204000



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N' Nassau 500mm
Retainer: 204005



208000

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N' Nassau 500mm
Retainer: 204000





0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



208011	301000	306000
Black Rubber Bottom Seals Material: EPDM Unit: Linear Metre	Adjustable Side Hinge Material: Galvanised Steel Unit: Pack (10)	Intermediate Hinge Material: Galvanised Steel Unit: Pack (20)
! Suitable for: Panel: 'N' Nassau 500mm Retainer: 204005	! Suitable for: Panel: 'N' Nassau 500mm	! Suitable for: Panel: 'N' Nassau 500mm





Did you know?

You can book onto *Indupart Training* online



Book now at
www.induparttraining.co.uk

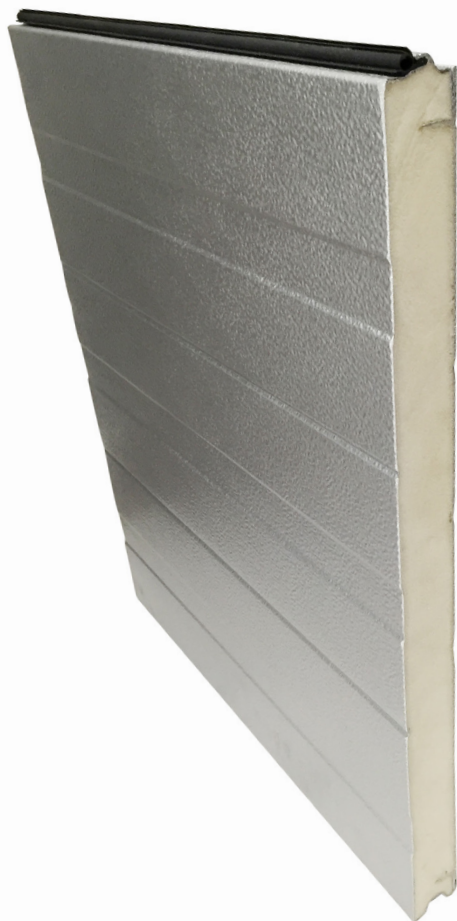

Type 'N' Nassau Panel | 600mm Deep

Description: Insulated sectional door panel

Material: Steel (10) / Aluminium (11)

Size: 600mm high x 44mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel or aluminium

Outside Face: Stucco embossed steel or aluminium

Lengths Available

Steel (10)

101004 4050mm long

101007 6100mm long

Aluminium (11)

100014 4050mm long

100016 6100mm long



We can spray any RAL / BS Colour



See pages 25/26 for parts
Suitable for this panel





0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201001

Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N' Nassau 600mm

202005

Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N' Nassau 600mm

202020

Extended Length End Cassette

Material: Galvanised Steel
Unit: Piece (1)



Suitable for:
Panel: 'N' Nassau 600mm



204000

Top and Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'N' Nassau 600mm

204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'N' Nassau 600mm



206000

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N' Nassau 600mm
Retainer: 204000



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N' Nassau 600mm
Retainer: 204005

208000

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N' Nassau 600mm
Retainer: 204000

208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N' Nassau 500mm
Retainer: 204005




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



301000	306000
Adjustable Side Hinge Material: Galvanised Steel Unit: Pack (10)	Intermediate Hinge Material: Galvanised Steel Unit: Pack (20)
 Suitable for: Panel: 'N' Nassau 600mm	 Suitable for: Panel: 'N' Nassau 600mm





Did you know?

Indupart offers a variety of industrial doors including

Fire Shutters




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



Type 'N9000' Panel | 670mm Deep

Description: Insulated sectional door panel

Material: Aluminium

Size: 670mm high x 44mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed aluminium

Outside Face: Stucco embossed aluminium

Lengths Available

Aluminium

100024	4050mm long
100026	6100mm long
100028	8200mm long



We can spray any RAL / BS Colour



See pages 29/30 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201007

Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N9000' 670mm



201017

Extra Wide Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N9000' 670mm



202007

Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N9000' 670mm



204000

Top and Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'N9000' 670mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'N' Nassau 670mm



206000

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N9000' 670mm
Retainer: 204000



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N9000' 670mm
Retainer: 204005



208000

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N' Nassau 670mm
Retainer: 204000



208015

Safety Edge

(Extra Deep)

Standard Edge



208011

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N9000' 670mm
Retainer: 204005



301000	306000
Adjustable Side Hinge Material: Galvanised Steel Unit: Pack (10)	Intermediate Hinge Material: Galvanised Steel Unit: Pack (20)
 Suitable for: Panel: 'N9000' 670mm	 Suitable for: Panel: 'N9000' 670mm





Did you know?

You can sign up for our *Newsletter* on our website
Join our *Mailing List* to receive the latest news and offers



Find out more at
www.indupart.co.uk



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



Type 'N8' Nassau Panel | 600mm Deep

Description: Insulated sectional door panel

Material: Aluminium

Size: 600mm high x 80mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed aluminium

Outside Face: Stucco embossed aluminium

Lengths Available Aluminium

100080

6100mm long



We can spray any RAL / BS Colour



See page 33 for parts
Suitable for this panel




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk




201005

End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N8' Nassau 600mm



201008

Extra Wide End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N8' Nassau 600mm




204015

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 3050mm



Suitable for:
Panel: 'N8' Nassau 600mm



204016

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'N8' Nassau 600mm



206011

Suitable for retainer: 204016

Suitable for retainer: 204015

206000

Black Rubber Top Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N8' Nassau 600mm



208000

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N8' Nassau 600mm
Retainer: 204015




208016

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Order (2): If ordering 204016 double bottom seal retainer
Suitable for:
Panel: 'N8' Nassau 600mm
Retainer: 204016




301000

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'N8' Nassau 600mm



306000

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'N8' Nassau 600mm



Type ‘K’ Panel | 600mm Deep

Description: Insulated sectional door panel

Material: Steel

Size: 600mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a white RAL 9002 polyester finish

Outside Face: Steel with a white RAL 9010 plastisol finish

Lengths Available

Steel

100103	3050mm long
100104	4050mm long
100105	5050mm long
100106	6100mm long
100108	8200mm long



We can spray any RAL / BS Colour



See page 35 for parts
Suitable for this panel




0161 432 6655



sales@indupart.co.uk




www.indupart.co.uk



202135	202140	202150
Intermediate Cassette Material: Galvanised Steel Unit: Pair (2)	Extra Wide Intermediate Cassette Material: Galvanised Steel Unit: Pair (2)	Bottom Cassette Material: Galvanised Steel Unit: Pair (2)
 Suitable for: Panel: 'K' 600mm	 Suitable for: Panel: 'K' 600mm	 Suitable for: Panel: 'K' 600mm




204013	3050mm
204014	4050mm
204009	5050mm
204010	6100mm



2040--	204012	206011
Top and Bottom Seal Retainer Material: Aluminium Unit: Piece (1)	Extra Deep Top and Bottom Seal Retainer Material: Aluminium Unit: Piece (1) Length: 6090mm	Black Rubber Top Seal Material: EPDM Unit: Linear Metre
 Suitable for: Panel: 'K' 600mm	 Suitable for: Panel: 'K' 600mm	 Suitable for: Panel: 'K' 600mm



208011	301010	306010
Black Rubber Bottom Seals Material: EPDM Unit: Linear Metre	Adjustable Side Hinge Material: Galvanised Steel Unit: Pack (10)	Intermediate Hinge Material: Galvanised Steel Unit: Pack (20)
 Suitable for: Panel: 'K' 600mm	 Suitable for: Panel: 'K' 600mm	 Suitable for: Panel: 'K' 600mm



Type 'T' Thyssen Panel | 610mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel

Size: 610mm high x 39mm thick

Ribbed Profiles: Both sides

Inside Face: Smooth with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Lengths Available

Steel

103103	3050mm long
103104	4050mm long
103105	5050mm long
103106	6100mm long
103112	12200mm long



We can spray any RAL / BS Colour



See page 37 for parts Suitable for this panel





0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



204013	3050mm
204014	4050mm
204009	5050mm
204010	6100mm

201009

Intermediate End Cassette - Fingersafe

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'T' Thyssen 610mm

202009

Bottom End Cassette - Fingersafe

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'T' Thyssen 610mm


2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'T' Thyssen 610mm



204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'T' Thyssen 610mm

206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'T' Thyssen 610mm


208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'T' Thyssen 610mm



301035

Adjustable Side Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'T' Thyssen 610mm


306014

Intermediate Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'T' Thyssen 610mm



Type 'H' Hormann Panel | 500mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel

Size: 500mm high x 42mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Lengths Available

Steel

102005	4050mm long
102000	8100mm long



We can spray any RAL / BS Colour



See page 39 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201050

Intermediate / Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'H' Hormann 500mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'H' Hormann 500mm




204018

Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 8000mm



Suitable for:
Panel: 'H' Hormann 500mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H' Hormann 500mm
Retainer: 204005



208010

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H' Hormann 500mm
Retainer: 204018



301012

Roller Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'H' Hormann 500mm



306012

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'H' Hormann 500mm





0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



Type ‘H’ Hormann Panel | 750mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel

Size: 750mm high x 42mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Lengths Available Steel

102055	4050mm long
102050	8100mm long



We can spray any RAL / BS Colour



See page 41 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201060

Intermediate / Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'H' Hormann 750mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'H' Hormann 750mm



204018

Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 8000mm



Suitable for:
Panel: 'H' Hormann 750mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H' Hormann 750mm
Retainer: 204005




208010

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H' Hormann 750mm
Retainer: 204018



301012

Roller Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'H' Hormann 750mm



306012

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'H' Hormann 750mm



‘W-RIB’ Kingspan Panel | 610mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel

Size: 610mm high x 40mm thick

Inside Face: Stucco embossed steel with a RAL 9010 polyester finish

Outside Face: Smooth micro-rib profile in a RAL 9010 polyester finish



We can spray any RAL / BS Colour

Lengths Available

Steel

101016-RIB 6100mm long



See page 43/44 for parts
Suitable for this panel




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk




201010

Intermediate End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W-RIB' Kingspan 610mm



201011

Extra Wide End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W-RIB' Kingspan 610mm



202010

Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W-RIB' Kingspan 610mm




202015

Wicket Door Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W-RIB' Kingspan 610mm



202120

Extended Length End Cassette

Material: Galvanised Steel
Unit: Piece (1)



Suitable for:
Panel: 'W-RIB' Kingspan 610mm



204013 3050mm
204014 4050mm
204009 5050mm
204010 6100mm

2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'W-RIB' Kingspan 610mm



204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'W-RIB' Kingspan 610mm




204060

Stepped Multi Adaptor

Material: Aluminium
Unit: Piece (1)
Length: 6000mm



Suitable for:
Panel: 'W-RIB' Kingspan 610mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'W-RIB' Kingspan 610mm




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



208011	301010	306010
Black Rubber Bottom Seals Material: EPDM Unit: Linear Metre	Adjustable Side Hinge Material: Galvanised Steel Unit: Pack (10)	Intermediate Hinge Material: Galvanised Steel Unit: Pack (20)
 Suitable for: Panel: ‘W-RIB’ Kingspan 610mm	 Suitable for: Panel: ‘W-RIB’ Kingspan 610mm	 Suitable for: Panel: ‘W-RIB’ Kingspan 610mm





Did you know?

Indupart Training has it's own on-site showroom



Find out more at
www.induparttraining.co.uk



'NF' Novoferm Panel | 625mm Deep

Description: Insulated sectional door panel

Material: Steel

Size: 625mm high x 45mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Lengths Available

Steel

102204	4050mm long
102206	6050mm long
102208	8100mm long
102212	12142mm long



We can spray any RAL / BS Colour



See page 47 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



202165

Intermediate / Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'NF' Novoform 625mm



204000

Top and Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'NF' Novoform 625mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'NF' Novoform 625mm




206000

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'NF' Novoform 625mm Retainer: 204000



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'NF' Novoform 625mm Retainer: 204005



208000

Black Rubber Bottom Seal


Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'NF' Novoform 625mm Retainer: 204000

208015

Safety Edge (Extra Deep)



Standard Edge


208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'NF' Novoform 625mm Retainer: 204005




301035

Adjustable Side Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'NF' Novoform 625mm



306014

Intermediate Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'NF' Novoform 625mm



'NF' Novoferm Panel | 500mm Deep

Description: Insulated sectional door panel

Material: Steel

Size: 500mm high x 45mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Lengths Available

Steel

102104	4050mm long
102106	6050mm long
102108	8100mm long
102112	12142mm long



We can spray any RAL / BS Colour



See page 49 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



202160

Intermediate / Bottom End Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'NF' Novoform 500mm



204000

Top and Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'NF' Novoform 500mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'NF' Novoform 500mm




206000

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'NF' Novoform 500mm
Retainer: 204000



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'NF' Novoform 500mm
Retainer: 204005



208000

Black Rubber Bottom Seal


Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'NF' Novoform 500mm
Retainer: 204000

208015

Safety Edge (Extra Deep)



Standard Edge


208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'NF' Novoform 500mm
Retainer: 204005




301035

Adjustable Side Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'NF' Novoform 500mm



306014

Intermediate Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'NF' Novoform 500mm



'H20' Panel | 500mm Deep

Description: Insulated sectional door panel

Material: Steel

Size: 500mm high x 42mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed Galvanised Steel

Outside Face: Stucco embossed Galvanised Steel



We can spray any RAL / BS Colour

Lengths Available

Steel

102024	4100mm long
102026	6200mm long
102020	8300mm long



See page 51 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201085

Intermediate Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'H20' 500mm




202085

Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'H20' 500mm



204013	3050mm
204014	4050mm
204009	5050mm
204010	6100mm

2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'H20' 500mm




204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'H20' 500mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H20' 500mm



208015

Safety Edge (Extra Deep)

Standard Edge

208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H20' 500mm



301015

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'H20' 500mm



306005

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'H20' 500mm



'K44' Panel | 600mm Deep

Description: Insulated sectional door panel

Material: Aluminium

Size: 600mm high x 44mm thick

Inside Face: Stucco embossed aluminium

Outside Face: Stucco embossed aluminium



We can spray any RAL / BS Colour

Lengths Available

Aluminium

100094	4100mm long
100090	8200mm long



See page 53/54 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201080

Intermediate Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'K44' 600mm




202080

Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'K44' 600mm



204000

Top and Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'K44' 600mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'K44' 600mm




206000

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'K44' 600mm
Retainer: 204000



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'K44' 600mm
Retainer: 204005




208000

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'K44' 600mm
Retainer: 204000



208011

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'K44' 600mm
Retainer: 204005



301015

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'K44' 600mm



306005

Intermediate Hinge**Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panel: 'K44' 600mm





Did you know?

Indupart offers a variety of industrial doors including:

Sectional Overhead Doors




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



'W' Kingspan Panel | 500mm Deep

Description: Insulated sectional door panel

Material: Steel

Size: 500mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Outside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Lengths Available Steel

101021	3050mm long
101020	6100mm long



We can spray any RAL / BS Colour



See page 57/58 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201020

Extra Wide Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W' Kingspan 500mm



201070

Intermediate Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W' Kingspan 500mm




202070

Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'W' Kingspan 500mm



202120

Extended Length End Cassette

Material: Galvanised Steel
Unit: Piece (1)



Suitable for:
Panel: 'W' Kingspan 500mm



2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'W' Kingspan 500mm




204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'W' Kingspan 500mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'W' Kingspan 500mm




208011

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'W' Kingspan 500mm



301010

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'W' Kingspan 500mm



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



306010

Intermediate Hinge**Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panel: 'W' Kingspan 500mm






Did you know?

Indupart offers a variety of industrial doors including:

Residential Sectional Overhead Doors

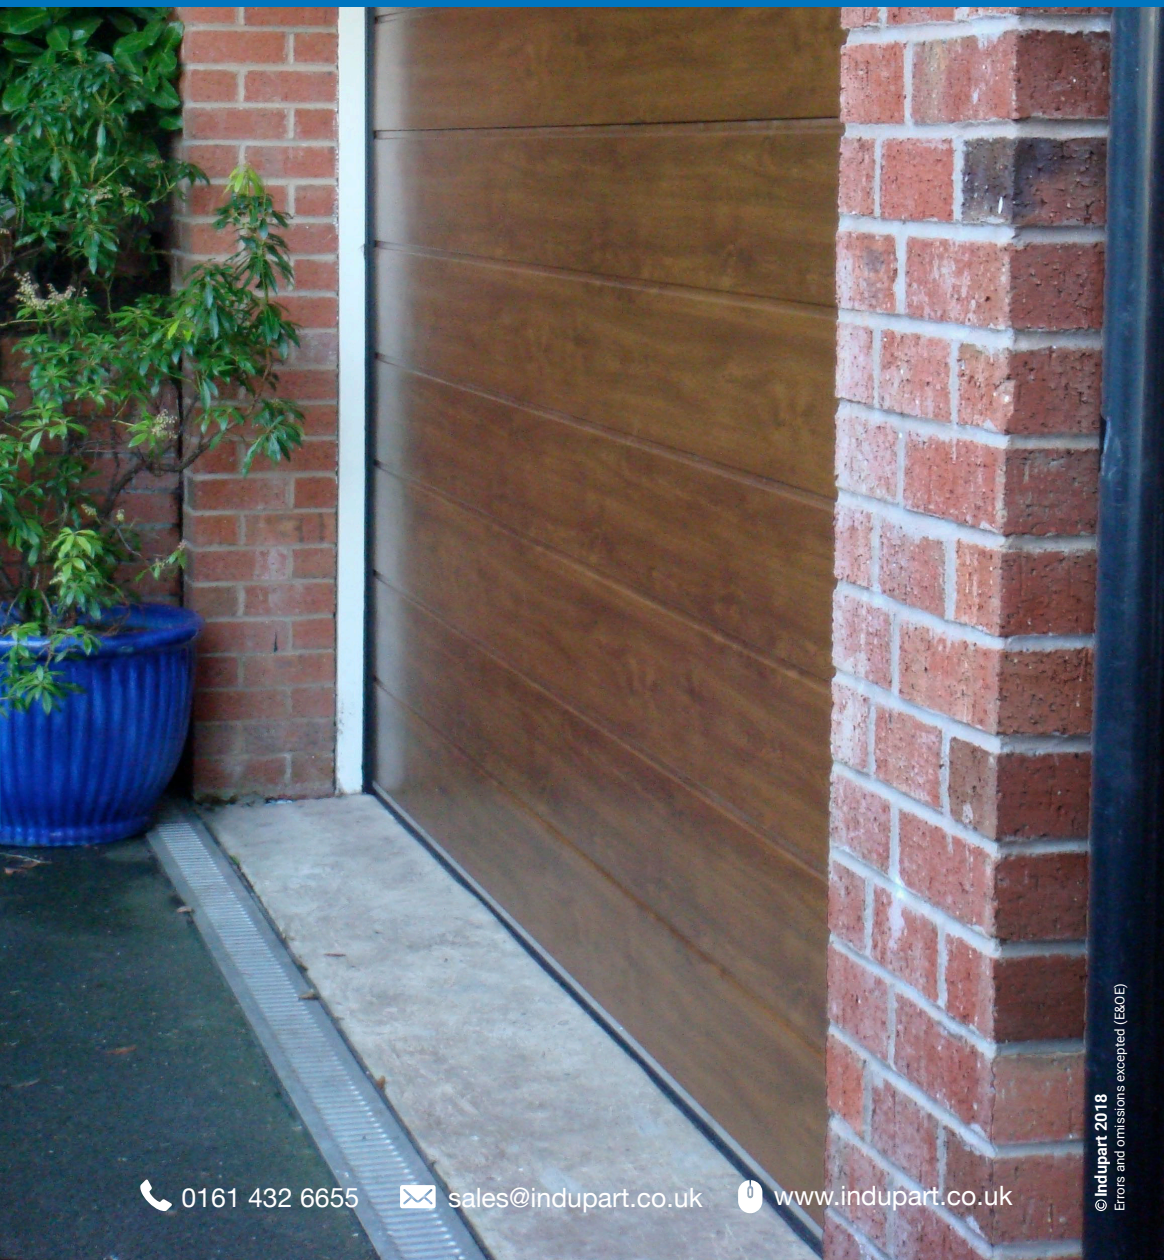



'R' Ryterna Panel | 610mm Deep

Description: 'Original TLP' *Fingersafe* insulated sectional door panel

Material: Steel

Size: 610mm high x 40mm thick

Inside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9016 white polyester finish

Lengths Available

Steel

103004	4050mm long
103005	5050mm long
103006	6100mm long
103008	8100mm long
103012	12500mm long



We can spray any RAL / BS Colour



See page 61 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



204013	3050mm
204014	4050mm
204009	5050mm
204010	6100mm

202300

Intermediate and Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'R' Ryterna 610mm

2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'R' Ryterna 610mm



204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'R' Ryterna 610mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'R' Ryterna 610mm

208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'R' Ryterna 610mm

301030

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'R' Ryterna 610mm



306010

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'R' Ryterna 610mm



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



'N900F' Nassau Panel | 670mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel / Aluminium

Size: 670mm high x 42mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed

Outside Face: Stucco embossed

Lengths Available

Steel (26)

100034	4100mm long
100036	6100mm long
100038	8200mm long

Aluminium (27)

100044	4100mm long
100046	6100mm long
100048	8200mm long



We can spray any RAL / BS Colour



See page 63 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201090

Intermediate Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N9000F' Nassau 670mm



202090

Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'N9000F' Nassau 670mm



204000

Top and Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'N9000F' Nassau 670mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'N9000F' Nassau 670mm



206011

Suitable for retainer: 204005

Suitable for retainer: 204000

206000

Black Rubber Top Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N9000F' Nassau 670mm




208000

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N9000F' Nassau 670mm
Retainer: 204000



208015

Safety Edge (Extra Deep)

Standard Edge

208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'N9000F' Nassau 670mm
Retainer: 204005



301013

Roller Hinge Assembly

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'N9000F' Nassau 670mm




306013

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'N9000F' Nassau 670mm



Lengths Available

Steel

101703	3050mm long
101704	4050mm long
101705	5050mm long
101706	6100mm long
101708	8100mm long
101713	13200mm long

'H400' Panel | 500mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel

Size: 500mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 polyester finish

Outside Face: Stucco embossed steel with a RAL 9002 polyester finish



We can spray any RAL / BS Colour



See page 65 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201050

Intermediate / Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'H400' 500mm




204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'H400' 500mm




206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 500mm
Retainer: 204005




208008

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 500mm
Please note: No retainer required.
Product fits direct to bottom panel.



301035

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'H400' 500mm



306014

Intermediate Hinge - Fingersafe


Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'H400' 500mm

208015

Safety Edge (Extra Deep)



Standard Edge


208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 500mm
Retainer: 204005



Lengths Available

Steel

101803	3050mm long
101804	4050mm long
101805	5050mm long
101806	6100mm long
101808	8100mm long
101813	13200mm long

'H400' Panel | 625mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel

Size: 625mm high x 41mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 polyester finish

Outside Face: Stucco embossed steel with a RAL 9002 polyester finish



We can spray any RAL / BS Colour



See page 67 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201055

Intermediate / Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'H400' 625mm




204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'H400' 625mm




206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 625mm
Retainer: 204005




208008

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 625mm
Please note: No retainer required.
Product fits direct to bottom panel.



301035

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'H400' 625mm



306014

Intermediate Hinge - Fingersafe


Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'H400' 625mm

208015

Safety Edge (Extra Deep)



Standard Edge

208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 625mm
Retainer: 204005




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



'R' Ryterna Panel | 500mm Deep

Description: 'Original TLP' *Fingersafe* Insulated sectional door panel

Material: Steel

Size: 500mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9016 traffic white polyester finish

Lengths Available

Steel

103204	4050mm long
103205	5050mm long
103206	6100mm long
103208	8100mm long
103212	12500mm long



We can spray any RAL / BS Colour



See page 69 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



204013	3050mm
204014	4050mm
204009	5050mm
204010	6100mm

202320

Intermediate and Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'R' Ryterna 500mm

2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'R' Ryterna 500mm



204012

Extra Deep Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'R' Ryterna 500mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'R' Ryterna 500mm

208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'R' Ryterna 500mm

301030

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'R' Ryterna 500mm




306010

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'R' Ryterna 500mm



Type 'H' Hormann Panel | 625mm Deep

Description: *Fingersafe* insulated sectional door panel

Material: Steel

Size: 625mm high x 42mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Lengths Available Steel

102045	4050mm long
102040	8100mm long



We can spray any RAL / BS Colour



See page 71 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201055

Intermediate / Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'H' Hormann 625mm



204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'H' Hormann 625mm



204018

Bottom Seal Retainer

Material: Galvanised Steel
Unit: Piece (1)
Length: 8000mm



Suitable for:
Panel: 'H' Hormann 625mm



206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H' Hormann 625mm
Retainer: 204005




208010

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H' Hormann 625mm
Retainer: 204018



208015

Safety Edge

(Extra Deep)

Standard Edge


208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H' Hormann 625mm
Retainer: 204005



301012

Roller Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'H' Hormann 625mm



306012

Intermediate Hinge

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'H' Hormann 625mm



'H400' Panel | 750mm Deep

Description: *Fingersafe* Insulated sectional door panel

Material: Steel

Size: 750mm high x 41mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9002 light grey polyester finish

Outside Face: Stucco embossed steel with a RAL 9002 polyester finish

Lengths Available

Steel

101903	3050mm long
101904	4050mm long
101905	5050mm long
101906	6100mm long
101908	8100mm long
101913	13200mm long



We can spray any RAL / BS Colour



See page 73 for parts
Suitable for this panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



201060

Intermediate / Bottom Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'H400' 750mm




204005

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6100mm



Suitable for:
Panel: 'H400' 750mm




206011

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 750mm
Retainer: 204005




208008

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 750mm
Please note: No retainer required.
Product fits direct to bottom panel.



301035

Adjustable Side Hinge

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'H400' 750mm



306014

Intermediate Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'H400' 750mm

208015

Safety Edge (Extra Deep)



Standard Edge

208011

Black Rubber Bottom Seals

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'H400' 750mm
Retainer: 204005




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



'E-Type' Panel | 610mm Deep

Description: *Fingersafe* Insulated sectional door panel

Material: Steel

Size: 610mm high x 40mm thick

Ribbed Profiles: Both sides

Inside Face: Stucco embossed steel with a RAL 9010 white polyester finish

Outside Face: Stucco embossed steel available in a range of colours

Please Note: Indupart has 2 colours available in stock, other colours are available by request

Lengths Available

Steel - RAL 9010

100124 4100mm long

100128 8200mm long

Steel - RAL 9006

100134 4100mm long

100138 8200mm long



We can spray any RAL / BS Colour



See page 75 for parts
Suitable for this panel





0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



202128 Left Hand (Shown)

202129 Right Hand

201022

Extra Wide Intermediate Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'E-Type' 610mm

201048

Bottom / Intermediate Cassette

Material: Galvanised Steel
Unit: Pair (2)



Suitable for:
Panel: 'E-Type' 610mm

2021--

Extended Length End Cassette

Material: Galvanised Steel
Unit: Piece (1)

Suitable for:
Panel: 'E-Type' 610mm
Please note: Handling shown is based on view from inside



204013 3050mm
204014 4050mm
204009 5050mm
204010 6100mm



2040--

Top and Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)



Suitable for:
Panel: 'E-Type' 610mm

204012

Extra Deep Top And Bottom Seal Retainer

Material: Aluminium
Unit: Piece (1)
Length: 6090mm



Suitable for:
Panel: 'E-Type' 610mm


206014

Black Rubber Top Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'E-Type' 610mm



208013

Black Rubber Bottom Seal

Material: EPDM
Unit: Linear Metre



Suitable for:
Panel: 'E-Type' 610mm

301014

Roller Hinge Assembly

Material: Galvanised Steel
Unit: Pack (10)



Suitable for:
Panel: 'E-Type' 610mm

306008

Intermediate Hinge - Fingersafe

Material: Galvanised Steel
Unit: Pack (20)



Suitable for:
Panel: 'E-Type' 610mm

Colour Chart

S40 (‘E-Type’)



RAL 9006 - In Stock



RAL 9010 - In Stock



RAL 1015



RAL 1021



RAL 3000



RAL 9002



RAL 9007



RAL 7021



RAL 7022



RAL 7035



RAL 9005



RAL 9001




RAL 5010



RAL 6005



RAL 6009



RAL 7016



RAL 5003



RAL 8014

Please note: The colours reproduced here are offered as a guide only.

It is possible that the finished product may be slightly different from those illustrated on this document.



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



Did you know?

Indupart Training offers a variety of courses including:

High Speed Door Training / Installation



Find out more at
www.induparttraining.co.uk


Sectional Door Components

Pages **79 - 174**

Seals, Retainers & Adaptors	Pages 79 - 85
Top Brackets, Bottom Brackets & Components	Pages 86 - 92
Roller Brackets	Pages 93 - 95
Intermediate Hinges & Connecting Plates	Pages 96 - 98
Rollers	Pages 99 - 102
Thermal Safe	Pages 103 - 106
Bracing Bars	Pages 107 - 108
Windows & Footsteps	Pages 109 - 113
Wicket Doors & Hardware	Pages 114 - 121
Wicket Door Handles & Locks	Pages 122 - 126
Springs	Pages 127 - 130
Spring Accessories	Pages 131 - 134
Drums, Cables & Components	Pages 135 - 149
Shafts, Couplings, Key Steels, Adaptors & Components	Pages 150 - 156
Bearings & Bearing Plates	Pages 157 - 160
Spring Brake Devices	Pages 161 - 163
Pusher Springs & Mounting Plates	Pages 164 - 165
Tracks, Angles & Components	Pages 166 - 171
Low Level Consoles	Pages 172 - 174

**206000****Black Rubber Top Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainers: 204000, 204015

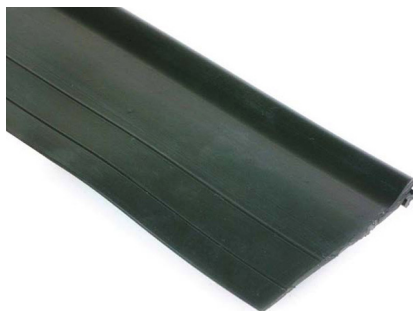**206011****Black Rubber Top Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainers: 204005, 204009, 204010, 204012, 204013, 204014, 204016

**206012****Black Rubber Top Seal - Double Fin****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainers: 204005, 204009, 204010, 204012, 204013, 204014, 204016

**208000****Black Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**Seal Retainers: 204000, 204015
Bungs: 208050
Safety: Pneumatic

**208008****Black Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**


Panels: H400-500, H400-625,
H400-750
Bungs: 208065, 208055
Safety: Pneumatic, optical

**208010****Black Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainer: 204018
Bungs: 208055
Safety: Optical

**208011****Black Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainers: 204013, 204014,
204009, 204012, 204080, 204005
Bungs: 208040
Safety: Pneumatic

**208013****Black Rubber Bottom Sea****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Panel: 'W' Kingspan 610mm
Seal Retainers: 204013, 204014,
204009, 204012, 204080, 204005
Bungs: 208065, 208055
Safety: Pneumatic, optical



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**208015****Extra Deep Black Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainers: 204013, 204014,
204009, 204010, 204012, 204080,
204005

Bungs: 208065, 208055

Safety: Pneumatic, optical


**208016****Black Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Panels: 80mm Thick Panels

Seal Retainer: 204016

Bungs: 208065, 208055

Safety: Pneumatic, optical

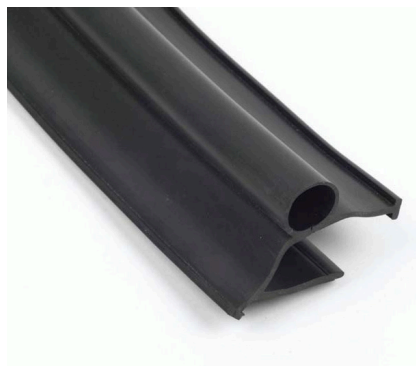**208020****Black Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainer: 204008

Bungs: 208045

Safety: Pneumatic

**7040--****Thick Black PVC Side Seal****Material:** Hard PVC with flexible TPE**Unit:** Piece (1)**Size:** See Above**Suitable for:**

Folded Leg Jamb Angle: 704000,
704010, 704020, 704021

704035	3060mm
704039	3660mm
704040	4560mm
704041	5560mm



704063 3035mm

704065 5090mm

70406-

Thermal Break Side Seal

Material: Black PVC & TPR

Unit: Piece (1)

Size: See Above



Suitable for:

Jamb Angles: 704000, 704010, 704020, 704021



704025

Thin Black Side Seal

Material: PVC

Unit: Linear Metre



Suitable for:

Jamb Angles: 704100, 704110, 704120
Track Guards: 509028



704045

Thick Black Side Seal - Offset

Material: Hard PVC with flexible TPR

Unit: Piece (1)

Size: 3660mm long



Suitable for:

Jamb Angle: 704000, 704010, 704020, 704021



704050

Black Side Seal

Material: PVC

Unit: Linear Metre



Suitable for:

Jamb Angle: 'C Type' Only



0161 432 6655




sales@indupart.co.uk



www.indupart.co.uk

**704070****Black Triple Fin Side Seal****Material:** PVC**Unit:** Linear Metre**Suitable for:**

Retainer: 208070

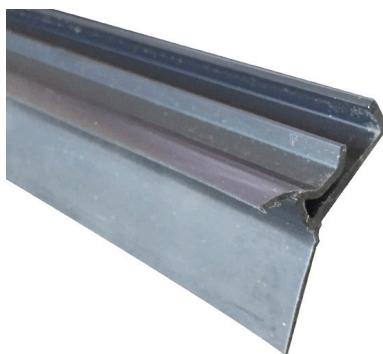**704072****PVC Side Seal****Material:** EPDM / PVC**Unit:** Piece (1)**Size:** 6000mm long**Suitable for:**

Jamb Angle: 704028

**204013** 3050mm**204014** 4050mm**204009** 5050mm**204010** 6100mm**2040--****Top and Bottom Seal Retainer****Material:** Aluminium**Unit:** Piece (1)**Size:** See above**Suitable for:**Seals: 208011, 206011, 206012,
208015, 208013
Panels: 40mm thick**204000****Top and Bottom Seal Retainer****Material:** Galvanised Steel**Unit:** Piece (1)**Size:** 44mm thick x 6090mm long**Suitable for:**Panels: 44mm thick
Seals: 206000, 208000

**204008****Bottom Seal Retainer - Short Leg****Material:** Aluminium**Unit:** Piece (1)**Size:** 40mm thick x 6090mm long**Suitable for:**

Seal: 208020

Panels: 40mm - 42mm thick panels

**204012****Extra Deep Top and Bottom Seal Retainer****Material:** Aluminium**Unit:** Piece (1)**Size:** 40mm thick x 6090mm long x 100mm Deep**Suitable for:**


Seals: 208011, 208015, 208013, 206011, 206012

Panels: 40mm thick panels

**204015****Top And Bottom Seal Retainer****Material:** Aluminium**Unit:** Piece (1)**Size:** 80mm thick x 3050mm long**Suitable for:**

Seals: 206000, 208000

Panels: 'N8'

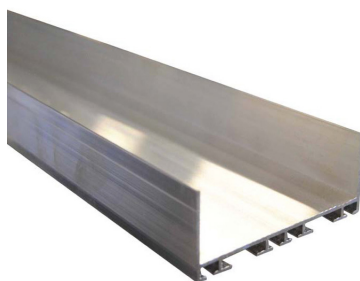**204016****Double Bottom Seal Retainer****Material:** Aluminium**Unit:** Piece (1)**Size:** 80mm thick x 6090mm long**Suitable for:**

Seals: 206011, 206012, 208016

Panels: 'N8', 'W-80'



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**204018****Bottom Seal Retainer****Material:** Galvanised Steel**Unit:** Piece (1)**Size:** 44mm thick x 8000mm long**Suitable for:**

Seal: 208010

Panels: 'H500', 'H625', 'H750'

**204020****Female Panel Adaptor****Material:** Aluminium**Unit:** Piece (1)**Size:** 40-44mm thick x 6000mm long**Suitable for:**

Connecting stepped / non-standard joint to Nassau commercial type profile

**204021****Male Type Panel Adaptor****Material:** Aluminium**Unit:** Piece (1)**Size:** 40-44mm thick x 6000mm long**Suitable for:**

Connecting stepped / non-standard joint to Nassau commercial type profile

**204060****Stepped Multi Adaptor****Material:** Aluminium**Unit:** Piece (1)**Size:** 40-44mm thick x 6000mm long**Suitable for:**

Converting a commercial joint panel to stepped design - panel must be made upside down For flush fit

**304000****Adjustable Top Roller Bracket****Material:** Galvanised Steel**Unit:** Pair (2)**Alternative:**

Stainless Steel: 304011

**304010****Top Roller Bracket****Material:** Zinc Plated Galvanised Steel**Unit:** Pair (2)**305000****Low Headroom Top Roller Bracket****Material:** Galvanised Steel**Unit:** Pair (2)**Suitable for:**

Top Roller: 308014

Alternative:

Stainless Steel: 305010

**302000****Inside Cable Bottom Bracket****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable**Maximum Door Weight:** 500kg**Maximum Cable Diameter:** 5mm

0161 432 6655




sales@indupart.co.uk




www.indupart.co.uk

**302010****Bottom Brackets - Hormann****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable**Suitable for:**

Standard Lift / Low Headroom

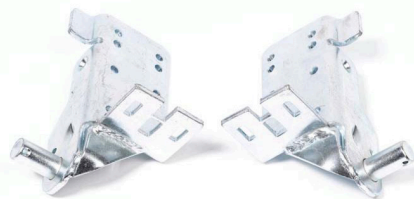**302015****Bottom Brackets - Hormann****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable**Suitable for:**

High Lift / Vertical Lift

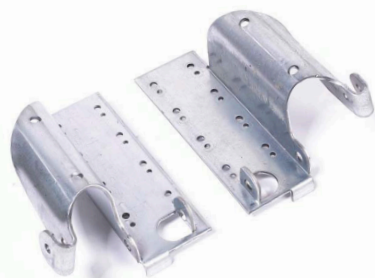**302020****Inside Cable Bottom Brackets****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Adjustable**Maximum Door Weight:** 275kg
Maximum Cable Diameter: 5mm**303001****Heavy Duty Outside Cable Bottom Brackets****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable**Maximum Door Weight:** 400kg
Maximum Cable Diameter: 6mm

**303037****Cable Brake Device****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable


Suitable for:
Panels: 'C', 'CM'

**303040****Safety Bottom Bracket****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Adjustable

Maximum Door Weight: 750kg
Maximum Cable Diameter: 6mm

**303045****Low Headroom Safety Bottom Bracket****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable

Maximum Door Weight: 750kg
Maximum Cable Diameter: 6mm

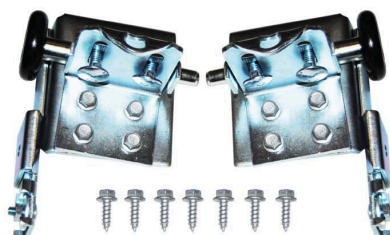**303047****Standard Bottom Bracket****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable

Maximum Cable Diameter: 5mm
Suitable for:
Panels: 'C'



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**303048****Standard Bottom Bracket****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable**Maximum Cable Diameter:** 5mm**Suitable for:**

Panels: 'CM'

**303050****Standard Safety Bottom Bracket Blade****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable**Maximum Door Weight:** 750kg**Maximum Cable Diameter:** 6mm**303054****Safety Bottom Bracket Blade - 3" Track****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable**Maximum Door Weight:** 750kg**Maximum Cable Diameter:** 6mm**303060****Safety Bottom Bracket****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Non-Adjustable**Maximum Door Weight:** 500kg**Maximum Cable Diameter:** 5mm

**302025****Eyebolts For Bottom Brackets****Material:** Galvanised Steel**Unit:** Pair (2)**Suitable for:**

Bottom Bracket: 302020

Maximum Cable Diameter: 5mm**303035****Cable Break Device****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Adjustable (Blade)**Maximum Door Weight:** 400kg**Maximum Cable Diameter:** 5mm**303036****Plastic Cover****Material:** Black Plastic**Unit:** Pair (2)**303038****Cable Break Device****Material:** Galvanised Steel**Unit:** Pair (2)**Application:** Adjustable**Suitable for:**

Cable Break Device: 303035

**Maximum Door Weight:** 450kg

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**303051****External Cable Extension Bracket****Material:** Galvanised Steel**Unit:** Pair (2)

Maximum Door Weight: 250kg
Maximum Cable Diameter: 5mm
Suitable for:
 Cable Break Device: 303050

**303057****Safety Bottom Bracket Interlock Switch****Material:** Galvanised Steel / 2 Core Cable**Unit:** Pair (2)

Suitable for:
 Bottom Brackets: 303060, 303045,
 303050, 303054

**303062****Anti Lift Bracket****Material:** Galvanised Steel**Unit:** Pair (2)

Application: Prevents external lifting of door.
 When cable is slack, this part will block the door.



Suitable for:
 Bottom Bracket: 303060


**303065****Black Plastic Cover****Material:** Black Plastic**Unit:** Pair (2)

Suitable for:
 Cable Break Device: 303060


**307091****Clevis Pin****Complete With:** Split Pin**Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Bottom Brackets: 302000, 303001

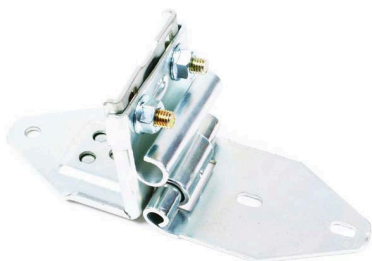

**301000****Roller Hinge****Material:** Galvanised Steel**Unit:** Pack (10)**Application:** Adjustable**Suitable for:**


Panels: 'C', 'N', 'N8', 'N9000A'

**301010****Roller Hinge****Material:** Galvanised Steel**Unit:** Pack (10)**Application:** Adjustable**Suitable for:**

Panels: 'W', 'W-80', 'CM', 'K'

Alternative:

Stainless Steel: 301011

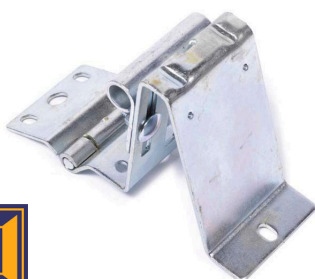**301012****Roller Hinge****Material:** Galvanised Steel**Unit:** Pack (10)**Application:** Adjustable**Suitable for:**

Panels: 'H500', 'H625', 'H750'

**301013****Roller Hinge****Material:** Galvanised Steel**Unit:** Pack (10)**Application:** Adjustable**Suitable for:**

Panel: '9000FA/S'

**301015****Roller Hinge - Short Leg****Material:** Galvanised Steel**Unit:** Pack (10)**Application:** Adjustable**Suitable for:**

Panels: 'H20', 'K44', Panoramic Panels

**301016****Roller Hinge****Material:** Galvanised Steel**Unit:** Pack (10)**Application:** Adjustable**Suitable for:**

Panels: 'C'

**301025****Roller Hinge****Material:** Galvanised Steel**Unit:** Piece (1)**Application:** Non-adjustable**Suitable for:**

Nylon rollers with 11mm diameter shaft

**301030****Roller Hinge****Material:** Galvanised Steel**Unit:** Pack (10)**Application:** Adjustable**Suitable for:**

Panel: 'R' Ryterna 500mm / 610mm




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

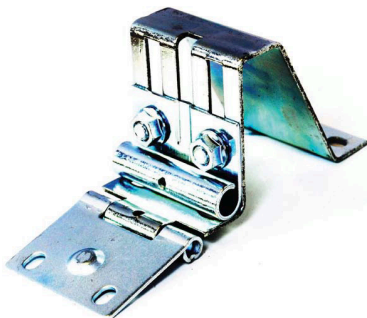**301035****Roller Hinge - Fingersafe****Material:** Galvanised Steel**Unit:** Pack (10)**Application:** Adjustable**Suitable for:**

Panels: 'W-F/S', 'T', 'H500', 'H625',
'H750', 'NF', 'H400-500', 'H400-625',
'H400-750'

**301040****Double Roller Scroll****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Roller Hinges: 301010, 301011
Top Bracket: 304000

**301009****Mounting Strip****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Roller Hinges: 301010, 301035

Requires:

Flanged Nut: 306051


**301041****Double Mounting Strip****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Roller Hinge: 301010H

Double Scroll: 301040

Requires:

Flanged Nut: 306051

**306000****Intermediate Hinge****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panels: 'C', 'N', 'N8', 'N9000'
 Roller Hinge: 301000

**306005****Intermediate Hinge - Short Leg****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panels: 'H20', 'K44'
 Roller Hinge: 301015

**306006****Intermediate Hinge****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panels: 'C'
 Roller Hinge: 301016

**306010****Intermediate Hinge****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panels: 'W', 'W-80', 'CM', 'K', 'R'
 Roller Hinge: 301010, 301030

Alternative:

Stainless Steel: 306011



0161 432 6655




sales@indupart.co.uk




www.indupart.co.uk

**306012****Intermediate Hinge****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panels: 'H500', 'H625', 'H750'
 Roller Hinge: 301012

**306013****Intermediate Hinge****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panel: '9000FA/S'
 Roller Hinge: 301013

**306014****Intermediate Hinge - Fingersafe****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panels: 'W-F/S', 'T', 'H500', 'H625',
 'H750', 'NF', 'H400-500', 'H400-625',
 'H400-750'
 Roller Hinge: 301035

**310010****Connecting Plate****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panels: 'C', 'K'

**310020****Connecting Plate****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Panels: 'W', 'N', 'N8', 'W8', 'CM',
'N9000', 'K44'



**308000****Nylon Roller****Material:** Nylon / Galvanised Steel**Unit:** Piece (1)**Length:** 119mm**Diameter:** 46mm (head)**Suitable for:**

Side Track: 7030--

Use in Track Size: 51mm**308002****Nylon Roller - Stainless Steel****Material:** Nylon / Stainless Steel**Unit:** Piece (1)**Length:** 118mm**Diameter:** 46mm (head)**Suitable for:**

Side Track: 7030--

Use in Track Size: 51mm**308005****Nylon Roller****Material:** Nylon / Galvanised Steel**Unit:** Piece (1)**Length:** 127mm**Diameter:** 43mm (head)**Suitable for:**

Bottom Brackets: 302010, 302015

Use in Track Size: 51mm**308010****Nylon Roller - Long****Material:** Nylon / Galvanised Steel**Unit:** Piece (1)**Length:** 193mm**Diameter:** 46mm (head)**Suitable for:**

Side Track: 7030--

Use in Track Size: 51mm

**308012****Nylon Roller - Stainless Steel Long****Material:** Nylon / Stainless Steel**Unit:** Piece (1)**Length:** 193mm**Diameter:** 46mm (head)**Suitable for:**

Side Track: 7030--

Use in Track Size: 51mm**308013****Tandem Roller****Material:** Nylon / Galvanised Steel**Unit:** Piece (1)**Length:** 131mm**Diameter:** 46.5mm (heads)**Suitable for:**

Side Track: 7030--

Use in Track Size: 51mm**308014****Tandem Roller****Material:** Nylon / Cast Steel**Unit:** Piece (1)**Diameter:** 46mm (heads)**Suitable for:**

Side Track: 7030--

Use in Track Size: 51mm**308020****Steel Roller****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 118mm**Diameter:** 46mm (heads)**Suitable for:**

Side Track: 7030--

Use in Track Size: 51mm

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**308021****Steel Roller - Long****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 190mm**Diameter:** 46mm (head)**Suitable for:**

Side Track: 7030--

Use in Track Size: 51mm**308024****Nylon Roller****Material:** Nylon / Galvanised Steel**Unit:** Piece (1)**Length:** 102mm**Diameter:** 45mm (head)**Suitable for:**

Panels: 'C', 'CM'

**308030****Nylon Roller - 3" Track****Material:** Nylon / Galvanised Steel**Unit:** Piece (1)**Length:** 164mm**Diameter:** 72mm (head)**Suitable For:** Side Track: 703010

Track Curve: 703020

Use in Track Size: 76mm**308030S****Steel Roller - 3" Track****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 212mm**Diameter:** 71mm (head)**Suitable For:** Side Track: 703010

Track Curve: 703020

Use in Track Size: 76mm

**308040****Roller Guard****Material:** Black Plastic**Unit:** Piece (1)

Suitable for: 11mm shaft and 41-51mm diameter nylon rollers



THERMALsafe®

Sectional Overhead Doors



The Sectional Overhead Door from Indupart can obtain the highest air impermeability level ever achieved in the Sectional Door Industry.



Example on a 5000 x 5000 Standard Lift

Air Permeability Results on the whole door using 40mm panel

Classification without Thermalsafe	Class 2 ($12\text{m}^3/\text{m}^2\cdot\text{h}$)
Classification with Thermalsafe	Class 4 ($3\text{m}^3/\text{m}^2\cdot\text{h}$)
Improvement	300%

The above can be achieved when the following parts are used on commercial joint Kingspan panels, in place of traditional hardware.


THERMALSsafe®
Kingspan®
202400
End Cassette - 610mm Deep
Material: Galvanised Steel

Unit: Pair (2)

Alternative: 202410 - 500mm Deep

Suitable for:

Insert: 202500 (610mm), 202420 (500mm)

Panels: '1', '2'


THERMALSsafe®
Kingspan®
202405
End Cassette - Extra Wide
Material: Galvanised Steel

Unit: Pair (2)

Suitable for:

Plastic Insert: 202500, 202510 (combined)

Panels: '1', '2'



THERMALSsafe®
Kingspan®
202500
Cassette Insert - 610mm Deep
Material: Plastic

Unit: Pair (2)

Alternative: 202420 - 500mm Deep

Suitable for:

End Cassette: 202400 (610mm), 202410 (500mm)

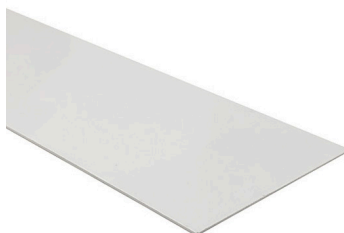
THERMALSsafe®
Kingspan®
202510
Cassette Insert Extension
Material: Plastic

Unit: Pair (2)

Suitable for:

Insert: 202500 (610mm), 202420 (500mm)

Cassette: 202405



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



THERMALSsafe®



202515

Double Sided Tape**Unit:** Linear Metre**Application:** To join 202510 to 202500 / 202420**Suitable for:**

End Cassette: 202405



THERMALSsafe®



204100

Lintel Profile**Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 5490mm**Suitable for:**

Side Seal: 207000



THERMALSsafe®



204110

Top and Bottom Retainer**Material:** Plastic**Unit:** Piece (2)**Length:** 6000mm**Suitable for:**Rubber Seal: 208016
Panels: '1', '2'

THERMALSsafe®



207000

Thermal Break Side Seal**Material:** Polythermalyne**Unit:** Piece (1)**Length:** 6060mm**Suitable for:**Lintel Profile: 204100
Jamb Angle: 7040--


THERMALSafe®
Kingspan®
207010
Compression Seal
Material: TPE

Unit: Linear Metre

Suitable for:

Side Seal: 207000


THERMALSafe®
Kingspan®
301038
Roller Hinge
Material: Galvanised Steel

Unit: Parts (10)

Suitable for:

Panels: '1', '2'


THERMALSafe®
Kingspan®
304008
Top Roller Bracket
Material: Galvanised Steel

Unit: Pair (2)

Suitable for:

Panels: '1', '2'


306010
Intermediate Hinge
Material: Galvanised Steel

Unit: Pack (20)

Suitable for:

 Panels: '1', '2'
 Roller Hinge: 301038


0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**309004****Bracing Bar****Material:** Galvanised Steel**Unit:** Piece (1)**Size:** 65mm deep x 6520mm long**Suitable for:**

Doors: 5500mm to 6500mm wide

**309005****Bracing Bar****Material:** Galvanised Steel**Unit:** Piece (1)**Size:** 65mm deep x 7020mm long**Suitable for:**

Doors: 6501mm to 7000mm wide

**309010****Bracing Bar****Material:** Galvanised Steel**Unit:** Piece (1)**Size:** 110mm deep x 8020mm long**Suitable for:**


Doors: Over 7001mm

**309020****Bracing Bar End Cap****Material:** Black Rubber**Unit:** Piece (1)**Suitable for:**

Bracing Bar: 309005

**309025****Bracing Bar End Cap****Material:** Black Rubber**Unit:** Piece (1)**Suitable for:**

Bracing Bar: 309010

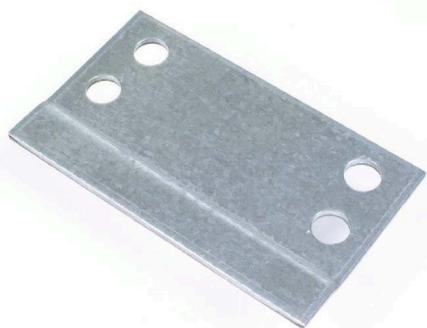**310000****Double Bracing Bar Mount Plate****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Bracing Bars: 309004, 309005, 309010

**310001****Single Bracing Bar Mount Clip****Material:** Galvanised Steel**Unit:** Pack (20)**Suitable for:**

Bracing Bars: 309004, 309005, 309010



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



104080 80mm

106015 40mm

10----

Large Oval Window

Material: Acrylic / Rubber

Unit: Piece (1)

Vision Size: 738mm x 394mm

Thickness: See Above



Over Frame Size: 780mm x 445mm



104085

Rectangular Window - Screw In

Material: Black Plastic / Acrylate

Unit: Piece (1)

Vision Size: 553mm x 248mm

Thickness: 80mm



Over Frame Size: 639mm x 334mm

Suitable for:

Panels: 75mm - 80mm thick



104090

Oval Peephole Window

Material: Perspex / Rubber

Unit: Piece (1)

Cut Out Size: 215mm x 85mm

Thickness: 40mm



Over Frame Size: 238mm x 115mm

Suitable for:

Panels: 40mm thick



104091

Oval Peephole Window

Material: Perspex / Rubber

Unit: Piece (1)

Cut Out Size: 215mm x 85mm

Thickness: 80mm



Over Frame Size: 238mm x 115mm

Suitable for:

Panels: 80mm thick

**106010****Oval Window****Material:** Acrylic / Rubber**Unit:** Piece (1)**Vision Size:** 623mm x 303mm**Thickness:** 40mm**Over Frame Size:** 660mm x 345mm**Suitable for:**

Panels: 40mm thick

**106020****Rectangular Window - Screw In****Material:** Black Plastic / Acrylate**Unit:** Piece (1)**Vision Size:** 553mm x 248mm**Thickness:** 40mm**Over Frame Size:** 639mm x 334mm**Suitable for:**

Panels: 38 - 40mm thick

**106021****Rectangular 'Easifit' Window - Snap In****Material:** Black Plastic / Acrylate**Unit:** Piece (1)**Cut Out Size:** 650mm x 345mm**Thickness:** 40mm**Over Frame Size:** 680mm x 370mm**Suitable for:**

Panels: 40mm - 45mm thick

**106023****Oval 'Proflex' Window - Snap In****Material:** Black Plastic / Acrylate**Unit:** Piece (1)**Cut Out Size:** 695mm x 295mm (+radius)**Thickness:** 40mm**Over Frame Size:** 727mm x 327mm**Suitable for:**

Panels: 38mm - 45mm thick



**106025****Oval 'Proflex' Window - Snap In****Material:** Black Plastic / Acrylate**Unit:** Piece (1)**Cut Out Size:** 640mm x 320mm (+radius)**Thickness:** 40mm**Over Frame Size:** 663mm x 343mm**Suitable for:**

Panels: 36mm - 45mm thick

**106026****Oval Window - Screw In****Material:** Black Plastic / Acrylate**Unit:** Piece (1)**Cut Out Size:** 640mm x 322mm (-radius)**Thickness:** 40mm**Over Frame Size:** 664mm x 346mm**Suitable for:**

Panels: 38mm - 40mm thick

**106027****Rectangular Window - Screw In****Material:** Black Plastic / Acrylate**Unit:** Piece (1)**Vision Size:** 553mm x 248mm**Thickness:** 50mm**Over Frame Size:** 639mm x 334mm**Suitable for:**

Panels: 44mm - 50mm thick

**106028****Rectangular Window - Screw In****Material:** Black Plastic / Acrylate**Unit:** Piece (1)**Vision Size:** 588mm x 156mm**Thickness:** 40mm**Over Frame Size:** 637mm x 205mm**Suitable for:**

Panels: 38mm - 42mm thick



0161 432 6655



sales@indupart.co.uk




www.indupart.co.uk

**106029****Rectangular Window - Snap In****Material:** Acrylic / Plastic**Unit:** Piece (1)**Vision Size:** 695mm x 351mm**Over Frame Size:** 774mm x 431mm**Suitable for:**

Panel: 'Nassau 9000F A/S'

**106060****Oval Window - Snap In****Material:** Black Plactic / Acrylate**Unit:** Piece (1)**Vision Size:** 632mm x 243mm**Thickness:** 40mm**Over Frame Size:** 710mm x 320mm**Suitable for:**

Panels: H500, H625, H750

**106080** See Below (a)**106085** See Below (b)**10608-****Round Window - Screw In****Material:** Stainless Steel / Safety Glass**Unit:** Piece (1)**Thickness:** 40mm

(a) Vision Size: 250mm diameter

(b) Vision Size: 162mm diameter

**Over Frame Size:** (a) 330mm (b) 242mm**Suitable for:**

Panels: 38mm - 42mm thick

106090**Oval 'Proflex' Window - Screw In****Material:** Black Plastic / Acrylate**Unit:** Piece (1)**Vision Size:** 257mm diameter**Thickness:** 40mm**Over Frame Size:** 329 diameter**Suitable for:**

Panels: 38mm - 42mm thick



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk


**110000****Oval Footstep / Handle****Material:** Black Nylon**Unit:** Piece (1)**Footplate Size:** 255mm (length) x 120mm (deep) x 51mm (wide)**Handle Size:** 255mm (length) x 120mm (deep) x 69mm (wide)**Suitable for:**

Panels: 37mm - 42mm thick

For wider panels request longer bolts**110010****C Type Footstep****Material:** Black Plastic**Unit:** Piece (1)**Size:** 244mm (width) x 190mm (height)**Suitable for:**

Panels: 'C', 'CM'

40mm - 44mm thick

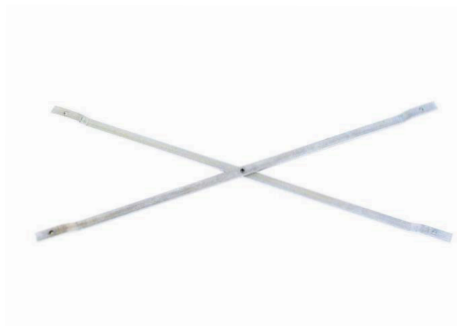**106040****Adjustable Security Bars****Material:** Galvanised Steel**Unit:** Piece (1)**Size:** 14mm (wide) x 10mm (depth) x 661mm (length)

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

Wicket Doors

Available to Order



We have all the details you need,
give us a call or send us an email:



0161 432 6655



sales@indupart.co.uk

(Image Shows: Low Threshold Wicket Door Kit)



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

Standard Wicket Door

Complete Standard kit for Sectional Door panels

210005 Right Hand

210006 Left Hand



Suitable for:

Panels: 40mm - 44mm thick

Max Width: 5000mm

Kit Comprises:

10903- Complete wicket door handle and back plate **1 each**

Please Note:

The hand of the back plate and lock will be chosen when confirming the handing of the hinge (as viewed from the inside)

109045 Wicket door lock **1 each**

109048 Euro profile cylinder **1 each**

109090 Door closet sliding rod **1 each**

209000 Anodised aluminium 'U' profile **2 each**

210000 Anodised aluminium 'J' profile **1 each**

210001 Grey rubber seal to suit wicket door **6 metres**

211010 Aluminium wicket door hinge 2500mm long **1 each**

211015 Wicket door drip strip 940mm **1 each**

306010 Intermediate hinges 40mm **4 each**

Please Note:

- 1) You must state panel thickness and panel type when ordering.
- 2) You must confirm what hand you require. From the inside looking out we need to know which side the main hinge should be located on.
- 3) You must confirm how many panels the wicket door is to be built into, or give the walkthrough dimensions to our team to calculate (if known.)



Low Threshold Wicket Door

Complete 'Low Threshold' kit for 40mm thick panels only

210008 Right Hand

210009 Left Hand



Suitable for:
Max Width: 5000mm

Kit Comprises:

10903- Complete wicket door handle and back plate **1 each**

Please Note:

The hand of the back plate and lock will be chosen when confirming the handing of the hinge (as viewed from the inside)

109045 Wicket door lock **1 each**

109048 Euro profile cylinder **1 each**

109090 Door closet sliding rod **1 each**

209000 Anodised aluminium 'U' profile **2 each**

210000 Anodised aluminium 'J' profile **1 each**

210001 Grey rubber seal to suit wicket door **6 metres**

211010 Aluminium wicket door hinge 2500mm long **1 each**

211015 Wicket door drip strip 940mm **1 each**

306010 Intermediate hinges 40mm **4 each**

501018 40 x 30 bright bar 1820mm **1 each**



This kit requires deep seal retainer 204012 and rubber bottom seal 208020 to achieve a threshold of 30mm

Typical sizes of a wicket door: 855mm x 1755mm

Lowest door height: 2400mm

Lowest door width: 2000mm

Please Note:

- 1) You must state panel thickness and panel type when ordering.
- 2) You must confirm what hand you require. From the inside looking out we need to know which side the main hinge should be located on.
- 3) You must confirm how many panels the wicket door is to be built into, or give the walkthrough dimensions to our team to calculate (if known.)



0161 432 6655



sales@indupart.co.uk




www.indupart.co.uk



109032 See Below (a)

109034 See Below (b)

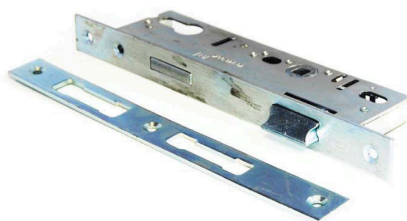

10903-

Door Handle and Back Plate Set

Material: Aluminium

Unit: Piece (1)



(a) Left hand for right hand hinge

(b) Right hand for left hand hinge

Suitable for:

Lock: 109045

109045

Wicket Door Lock

Material: Aluminium

Unit: Piece (1)

Application: Universal



Suitable for:

Handle: 10903-



109048

Euro Profile Cylinder

Material: Aluminium

Unit: Piece (1)



Suitable for:

Lock: 109045



109050

Wicket Door Handle

Material: Anodised Aluminium

Unit: Piece (1)



Suitable for:

Panels: 38mm - 44mm thick

Locks: 109055, 109056

**109055****Wicket Door Lock - Left Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Handle: 109050

**109056****Wicket Door Lock - Right Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Handle: 109050

**109065****Lockable Cylinder with Thumb Turn****Material:** Aluminium**Unit:** Piece (1)**Suitable for:**

Locks: 109055, 109056

Handle: 109050

No cylinder is keyed the same

**109070****Emergency Push Pad****Material:** Coated Steel**Unit:** Piece (1)**Handing:** Universal**Suitable for:** Sectional Doors and Roller Shutters

0161 432 6655




sales@indupart.co.uk



www.indupart.co.uk

**109090****Wicket Door Closer****Material:** Aluminium**Unit:** Piece (1)

Maximum Door Width: 900mm
Maximum Door Weight: 45kg

**209000****'U' Profile****Material:** Anodised Aluminium**Unit:** Piece (1)**Size:** 40mm thick x 6000mm long

Suitable for:
 Panels: 38mm - 42mm thick

**210000****'J' Profile****Material:** Anodised Aluminium**Unit:** Piece (1)**Size:** 40mm thick x 6000mm long

Suitable for:
 Panels: 38mm - 42mm thick

**210001****Wicket Door Seal****Material:** Black Rubber**Unit:** Linear Metre

Suitable for:
 'J' Profile: 210000, 210010

**210010****'J' Profile****Material:** Anodised Aluminium**Unit:** Piece (1)**Size:** 44mm thick x 6000mm long**Suitable for:**

Panels: 44mm thick

**210020****'U' Profile****Material:** Anodised Aluminium**Unit:** Piece (1)**Size:** 44mm thick x 6000mm long**Suitable for:**

Panels: 44mm thick

**211010****Pinless Hinge****Material:** Anodised Aluminium**Unit:** Piece (1)**Size:** 2500mm long**211015****Wicket Door Drip Strip****Material:** Anodised Aluminium**Unit:** Piece (1)**Size:** 940mm long

**501018****Bright Bar****Material:** Bright Carbon**Unit:** Piece (1)**Size:** 40mm wide x 20mm height x 3400mm long

Suitable for: Low Threshold Wicket Doors when used with deep retainer 204012

**908050****Magnetic Interlock Switch****Material:** Aluminium (magnets) / ABS Plastic (junction box)**Unit:** Piece (1)**Power:** 24V**Cable Spec:**

2 core 0.14mm² PVC covered - 3000mm long

**908063****Safety Limit Switch - Arm Type****Material:** Thick PVC Housing**Unit:** Piece (1)**Power:** Max 240v AC - 3 amp**Rating:** IP67**Operating Temp:** -30°C - +70°C with no icing**Suitable for:**

Locks: 108010, 108020

**908065****Safety Limit Switch - Ball Type****Material:** Thick PVC Housing**Unit:** Piece (1)**Power:** Max 240v AC - 3 amp**Rating:** IP67**Operating Temp:** -30°C - +70°C with no icing**Suitable for:**

Locks: 108010, 108020

**109010****Lock Handle****Material:** Chrome Plated**Unit:** Piece (1)**Suitable for:**

Lock: 107000

**109032** See Below (a)**109034** See Below (b)**10903-****Wicket Door Handle and Back Plate Set****Material:** Aluminium**Unit:** Piece (1)

(a) Left hand for right hand hinge

(b) Right hand for left hand hinge

Suitable for:

Lock: 109045

**109050****Wicket Door Handle****Material:** Anodised Aluminium**Unit:** Piece (1)**Suitable for:**

Panels: 38mm - 44mm thick

Locks: 109055, 109056

**109070****Emergency Push Pad****Material:** Coated Steel**Unit:** Piece (1)**Handing:** Universal**Suitable for:** Sectional Doors and
Roller Shutters


0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk


**107000****Side Lock****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Handle: 109010

**107001****Internal Lock****Material:** Galvanised Steel**Unit:** Piece (1)**Size:**

Bar Length: 180mm

Box: 80mm x 23mm

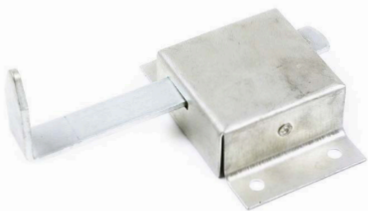**Suitable for:** Internal use only**107003****Mini Box Lock****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:** Internal use only**107010****Shoot Bolt - Hormann****Material:** Cast Alloy**Unit:** Piece (1)**Suitable for:** Internal and external use
Lockable by padlock

**108010****Spring Loaded Shoot Bolt**

Material: Galvanised Steel / Black Plastic
Knob & Cover

Unit: Piece (1)



Suitable for: Internal use only
Combine with Safety Limit Switches
908063 / 908065 for electric
operation

**108020****'D' Handle Lock**

Material: Galvanised Steel

Unit: Piece (1)



Suitable for: Internal use only
Combine with Safety Limit Switches
908063 / 908065 for electric
operation

**108030****Cylinder Lock**

Material: Black Coated Steel

Unit: Kit (1)



Includes: Euro cylinder, 2 keys
Suitable for:
Panels: Industrial / Residential 40mm
thick

**108040****Black Cylinder Lock**

Material: Black Coated Galvanised Steel

Unit: Kit (1)

Operation:

Internal: Turning Knob

External: Turning Key



Includes: Euro cylinder, 2 keys
Suitable for: Residential / Industrial




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

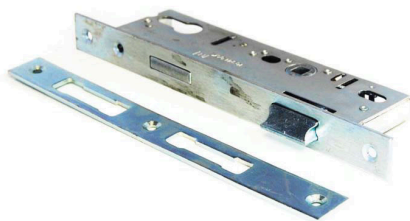**109045****Wicket Door Lock****Material:** Aluminium**Unit:** Piece (1)**Application:** Universal**Suitable for:**

Handle: 10903-

**109048****Euro Profile Cylinder****Material:** Aluminium**Unit:** Piece (1)**Suitable for:**

Lock: 109045

**109055****Wicket Door Lock - Left Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Handle: 109050

**109056****Wicket Door Lock - Right Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Handle: 109050

**109065****Lockable Cylinder with Thumb Turn****Material:** Aluminium**Unit:** Piece (1)**Suitable for:**

Locks: 109055, 109056

Handle: 109050

No cylinder is keyed the same**109075****External Lock For Push Pad****Material:** Coated Steel**Unit:** Piece (1)**Suitable for:**

Emergency Push Pad: 109070

Please Note: Design may vary**801045****Small Centre Lock****Material:** Brass / Galvanised Steel**Unit:** Piece (1)**Size:**

Cylinder Projection: 15mm

Steel Base: 15mm (depth) x 42mm (width) x 156mm (length)



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

Springs

Available to Special Order



High Tensile Steel Sectional Overhead Torsion Spring

89mm inside diameter
130mm inside diameter



Indupart can also supply springs over the standard length of 1500mm - any size.

Please contact your local Indupart depot for prices and availability



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

High Tensile Steel Sectional Overhead Torsion Spring

Heat treated for optimal performance / Shot blasted for ultimate strength

95mm (3 ¾") inside diameter

Part	Diameter	Length	Handing
40110L / 40111R	6.5mm	1300mm	LHW / RHW
40201L / 40202R	7.0mm	1500mm	LHW / RHW
40203L / 40204R	7.5mm	1500mm	LHW / RHW
40205L / 40206R	8.0mm	1500mm	LHW / RHW
40207L / 40208R	8.5mm	1500mm	LHW / RHW
40209L / 40210R	9.0mm	1500mm	LHW / RHW
40211L / 40212R	9.5mm	1500mm	LHW / RHW
40213L / 40214R	10.0mm	1500mm	LHW / RHW
40215L / 40216R	10.5mm	1500mm	LHW / RHW



Please note: 40213L, 40214R, 40215L, 40216R would require a special order for castings if made for a 25.4mm (1") shaft



*Left Hand
Wound (LHW)
Spring*



Suitable for:

Spring Fitting: 406000 (6.5mm - 9.5mm
Tolerance)
Spring Filler: 404050



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

High Tensile Steel Sectional Overhead Torsion Spring

Heat treated for optimal performance / Shot blasted for ultimate strength


152mm (6") inside diameter

Part	Diameter	Length	Handing
40303L / 40304R	7.5mm	1500mm	LHW / RHW
40305L / 40306R	8.0mm	1500mm	LHW / RHW
40307L / 40308R	8.5mm	1500mm	LHW / RHW
40309L / 40310R	9.0mm	1500mm	LHW / RHW
40311L / 40312R	9.5mm	1500mm	LHW / RHW
40313L / 40314R	10.0mm	1500mm	LHW / RHW
40315L / 40316R	10.5mm	1500mm	LHW / RHW
40317L / 40318R	11.0mm	1500mm	LHW / RHW
40319L / 40320R	11.0mm	1750mm	LHW / RHW
40321L / 40322R	11.5mm	1810mm	LHW / RHW



Suitable for:

Spring Fitting: 407000 (7.5mm - 13.0mm
Tolerance)
Spring Filler: 404000

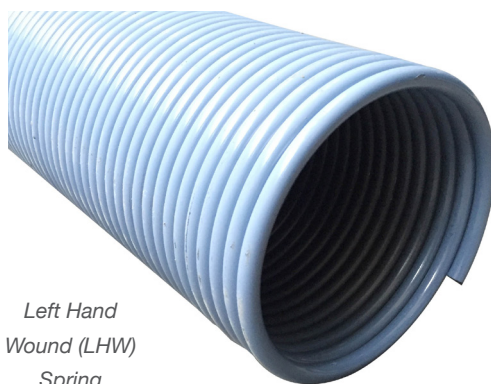

*Left Hand
Wound (LHW)
Spring*



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

High Tensile Steel Sectional Overhead Door Spring

Heat treated for optimal performance / Shot blasted for ultimate strength

51mm (2") inside diameter

Part	Diameter	Length	Handing
40088L / 40089R	5.0mm	1000mm	LHW / RHW
40090L / 40091R	5.5mm	1000mm	LHW / RHW
40092L / 40093R	6.0mm	1000mm	LHW / RHW



Suitable for:

Spring Fitting: 405000
(4.5mm - 6.0mm Tolerance)


67mm (2 5/8") inside diameter

Part	Diameter	Length	Handing
40094L / 40095R	6.0mm	1000mm	LHW / RHW
40096L / 40097R	6.5mm	1000mm	LHW / RHW
40098L / 40099R	7.0mm	1000mm	LHW / RHW




Suitable for:

Spring Fitting: 405010
(6.0mm - 7.0mm Tolerance)

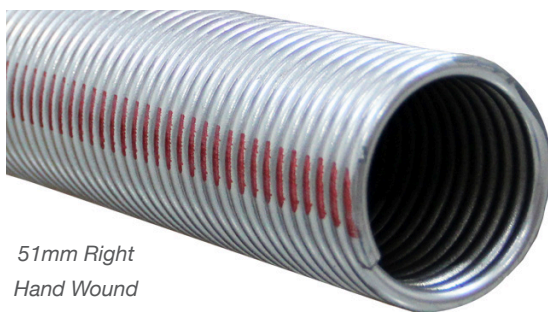

*51mm Right
Hand Wound
(RHW) Spring*

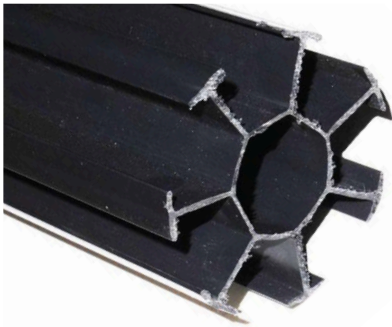

**306067****Hexagonal Head Set Screw****Material:** Galvanised Steel**Unit:** Bag (100)**Size:** M8 x 40mm**Suitable for:** Connecting a bearing plate to a spring anchor**404000****Spring Filler****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 1000mm**Internal Diameter:** 33mm**Suitable for:** 152mm (6") Springs**404050****Spring Filler****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 1000mm**Internal Diameter:** 27mm**Suitable for:** 95mm (3¾") Springs**405000****Spring Fittings****Material:** Aluminium**Unit:** Pair (2) - One Plug & One Winder**Shaft Diameter:** 25.4mm (1")**Markings:** Red - RHW / Black - LHW**Suitable for:**
Springs: 51mm (2") Springs
Wire: 4.5mm - 6.0mm



405010

Spring Fittings**Material:** Aluminium**Unit:** Pair (2) - One Plug & One Winder**Shaft Diameter:** 25.4mm (1")**Markings:** Red - RHW / Black - LHW**Suitable for:**

Springs: 67mm (2 5/8")


Wire: 6.0mm - 7.0mm

406000

Spring Fittings**Material:** Aluminium**Unit:** Pair (2) - One Plug & One Winder**Shaft Diameter:** 25.4mm (1")**Markings:** Red - RHW / Black - LHW**Suitable for:**

Springs: 95mm (3 3/4")

Wire: 6.5mm - 9.5mm

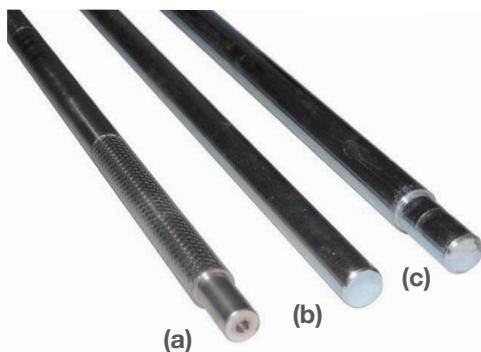

407005 See Below (a)

407010 See Below (b)

407020 See Below (c)

4070--

Spring Tension Bar**Material:** Galvanised Steel**Unit:** Pair (2)**(a) Light duty:** 450mm long x 13mm diameter**(b) Heavy duty:** 900mm long x 17mm diameter**(c) Medium duty:** 900mm long x 16mm diameter

**407000****Spring Fittings****Material:** Aluminium**Unit:** Pair (2) - One Plug & One Winder**Shaft Diameter:** 25.4mm (1")**Markings:** Red - RHW / Black - LHW**Suitable for:**

Springs: 152mm (6")

Wire: 7.5mm - 13.0mm

Non-Universal: State hand of spring when ordering for correct fittings**407001****Spring Fittings****Material:** Aluminium**Unit:** Pair (2) - One Plug & One Winder**Shaft Diameter:** 31.75mm (1¼")**Markings:** Red - RHW / Black - LHW**Suitable for:**

Springs: 152mm (6")

Wire: 7.5mm - 13.0mm

Non-Universal: State hand of spring when ordering for correct fittings**407003****Duplex Nut****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:** Connecting Spring Fitting (406000) to Spring Fitting (407000)**407040****Spring Tension Device****Material:** Cast Steel**Unit:** Piece (1)**Suitable for:** 'C' Type Winding Plugs
Tension bars: 407010, 407020

**615010****Spring Wire Gauge****Material:** Galvanised Steel**Unit:** Piece (1)**Gauge:** 4.5mm to 11mm wire

**601000****Cable Drums For Vertical Lift: FF-VL-11****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 5mm**Max. Door Weight:** 500kg**Max. Opening Height:** 3300mm**Configuration:** 2 safety wraps**602000****Cable Drums For Vertical Lift: FF-VL-18****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 5mm**Max. Door Weight:**

Under 4000mm: 600kg

Over 4000mm: 500kg

Max. Opening Height: 6000mm**Configuration:** 2 safety wraps

**602010****Cable Drums For Vertical Lift - FF-VL-18****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 31.75mm (1¼")**Max. Cable Diameter:** 5mm**Max. Door Weight:**

Under 4000mm: 600kg

Over 4000mm: 500kg

Max. Opening Height: 6000mm**Configuration:** 2 safety wraps**602050****Cable Drums For Vertical Lift - FF-VL-28****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 6mm**Max. Door Weight:**

Up to 7000mm: 825kg

Up to 8500mm: 750kg

Max. Opening Height:

7000mm (2 Safety Wraps)

8500mm (0.5 Safety Wraps)

Note: Anything less than 2 safety wraps is not recommended

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**602055****Cable Drums For Vertical Lift - FF-VL-28****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 31.75mm (1¼")**Max. Cable Diameter:** 6mm**Max. Door Weight:**


Up to 7000mm: 825kg

Up to 8500mm: 750kg

Max. Opening Height:

7000mm (2 Safety Wraps)

8500mm (0.5 Safety Wraps)

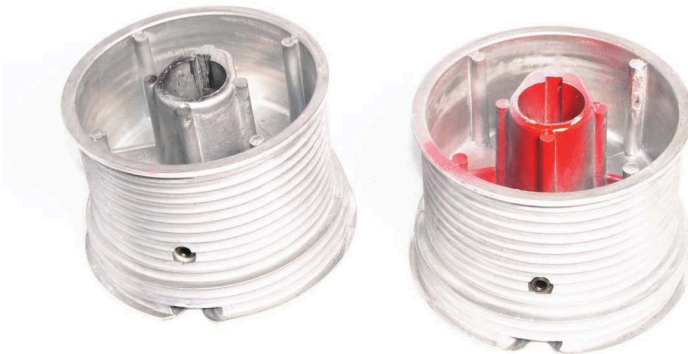Note: Anything less than 2 safety wraps is not recommended**603020****Cable Drums For Standard Lift - FF-NL-13****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 4mm**Max. Door Weight:** 340kg**Max. Opening Height:** 4005mm**Configuration:** 2 safety wraps


**604000****Cable Drums For Standard Lift - FF-NL-18****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 5mm**Max. Door Weight:** 500kg**Max. Opening Height:** 5570mm**Configuration:** 2 safety wraps**604020****Cable Drums For Standard Lift - FF-NL-32****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 6mm**Max. Door Weight:** 700kg**Max. Opening Height:** 10175mm**Configuration:** 2 safety wraps

**604030****Cable Drums For Standard Lift - FF-NL-32****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 31.75mm (1¼")**Max. Cable Diameter:** 6mm**Max. Door Weight:** 700kg**Max. Opening Height:** 10175mm**Configuration:** 2 safety wraps**605000****Cable Drums For High Lift - FF-HL-164****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 6mm**Max. Door Weight:**

High Lift up to 2500mm: 650kg

High Lift over 2500mm: 575kg

Max. Opening Height: 6000mm**Max. High Lift:** 4100mm**Configuration:** 2 safety wraps

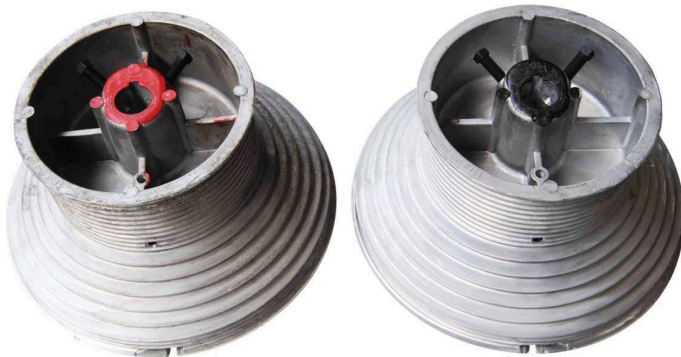**605001****Cable Drums For High Lift - FF-HL-164****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 31.75mm (1¼")**Max. Cable Diameter:** 6mm**Max. Door Weight:**

High Lift up to 2500mm: 650kg

High Lift over 2500mm: 575kg

Max. Opening Height: 6000mm**Max. High Lift:** 4100mm**Configuration:** 2 safety wraps**606000****Cable Drums For High Lift - FF-HL-120****Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 5mm**Max. Door Weight:**

High Lift up to 2500mm: 500kg

High Lift over 2500mm: 450kg

Max. Opening Height: 5020mm**Max. High Lift:** 3010mm**Configuration:** 2 safety wraps




607000

Cable Drums For High Lift - FF-HL-54**Material:** Aluminium**Unit:** Pair (2)**Shaft Diameter:** 25.4mm (1")**Max. Cable Diameter:** 5mm**Max. Door Weight:** 500kg**Max. Opening Height:** 4800mm**Max. High Lift:** 1370mm**Configuration:** 2 safety wraps

607040

17/3 Cable Drum**Material:** Plastic**Unit:** Pair (2)**Shaft Diameter:** 32mm Hexagonal

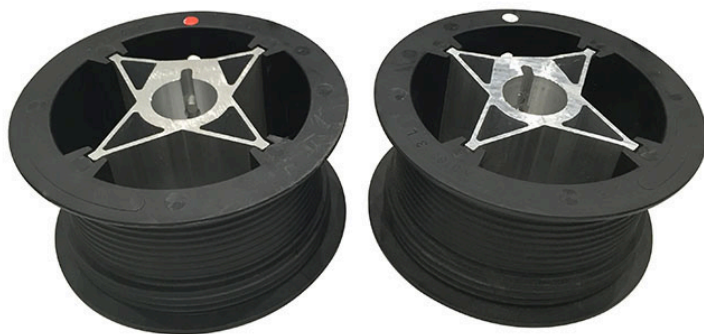


607050

10/5 Cable Drum**Material:** Aluminium (Centre) / Plastic (External)**Unit:** Pair (2)**Shaft Diameter:** 35mm Round

607055

10/5 Cable Drum**Material:** Plastic**Unit:** Pair (2)**Shaft Diameter:** 32mm Hexagonal

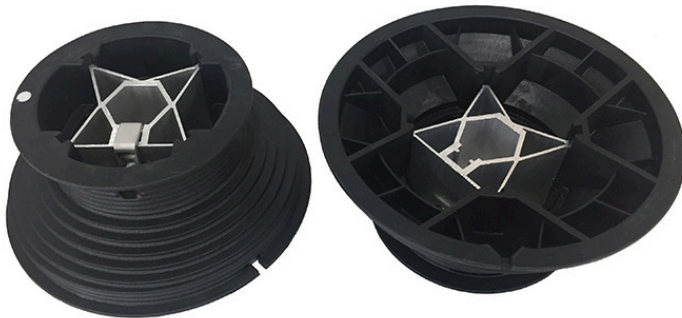**607060****7/5 Cable Drum****Material:** Aluminium (centre)/ Plastic (external)**Unit:** Pair (2)**Shaft Diameter:** 35mm Round**607065****4/5 Cable Drum****Material:** Aluminium (Centre) / Plastic (External)**Unit:** Pair (2)**Shaft Diameter:** 32mm Hexagonal

Material: Galvanised Steel

610013 3mm diameter

610014 4mm diameter

610015 5mm diameter

610016 6mm diameter

Material: Stainless Steel

610129 4mm diameter

610139 5mm diameter



610---

7x19 Wire Lifting Cable

Material: Galvanised Steel OR Stainless Steel

Unit: Linear Metre



Galvanised Steel Suitable for:

3mm: 190kg

4mm: 320kg

5mm: 500kg

6mm: 720kg

Please note: Weight shown is based on safety factor 6:1 when made in pairs



Stainless Steel Suitable for:

4mm: 278kg

5mm: 433kg

Please note: Weight shown is based on safety factor 6:1 when made in pairs



Please note: Indupart can make cables to any length. If we are making the bottom bracket end only, we can't guarantee the safe application of the stop end. Where a stop end cable sleeve is supplied and fitted by Indupart, the stop end is only suitable for attaching to a cable drum that has 2 safety wraps minimum.



Material: Galvanised Steel

610100	3mm diameter	100m roll
610105	3mm diameter	200m roll
610110	3mm diameter	1000m roll
610112	4mm diameter	50m roll
610115	4mm diameter	100m roll
610120	4mm diameter	200m roll
610125	4mm diameter	1000m roll
610130	5mm diameter	100m roll
610135	5mm diameter	200m roll
610140	5mm diameter	1000m roll
610142	5mm diameter	500m roll
610145	6mm diameter	100m roll
610150	6mm diameter	200m roll
610152	6mm diameter	500m roll



Material: Stainless Steel

610129A	4mm diameter	250m roll
610139A	5mm diameter	250m roll

6101--

7x19 Wire Cable On Timber Reels

Material: Galvanised Steel OR Stainless Steel

Unit: Piece (1)

Sizes: See above



Galvanised Steel Suitable for:

3mm: 190kg

4mm: 320kg

5mm: 500kg

6mm: 720kg

Please note: Weight shown is based on safety factor 6:1 when made in pairs




Stainless Steel Suitable for:

4mm: 278kg

5mm: 433kg

Please note: Weight shown is based on safety factor 6:1 when made in pairs

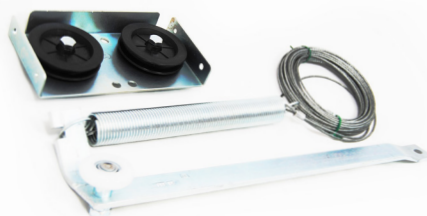

**608000****Pulley Wheel****Material:** Steel**Unit:** Piece (1)**Inside Diameter:** 10mm**Outside Diameter:** 100mm**Max. Cable Diameter:** 5mm**Max. Tolerance:** 450kg**608001****Pulley Wheel****Material:** Nylon**Unit:** Piece (1)**Inside Diameter:** 17mm (10mm reducers)**Outside Diameter:** 90mm**Max. Cable Diameter:** 5mm**Max. Tolerance:** 450kg**610030****Cable Tensioning Set - Standard Lift****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:** Standard Lift Doors**610040****Cable Tensioning Set - Low Headroom****Material:** Galvanised Steel**Unit:** Piece (1)**Max. Door Height:** 5570mm**Suitable for:** CE Marked Low Headroom Doors

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**611000****Cable Clamp****Material:** Galvanised Steel**Unit:** Pack (10)**Size:** 3.2mm**611020****Cable Clamp****Material:** Cast Steel**Unit:** Pack (10)**Suitable for:**

Cable: 3mm, 4mm

**612000****6mm Shackle For Pull Rope****Material:** Galvanised Steel**Unit:** Piece (1)**Max. Tolerance:** 100kg**Suitable for:**

Hoisting Rope: 802000

**613000** See Below (a)**613010** See Below (b)**613011** See Below (c)**6130--****Cable Thimbles****Material:** Steel Plated**Unit:** Bag (100)**Suitable for:**

(a): 3mm Diameter Cable

(b): 4/5mm Diameter Cable

(c): 6mm Diameter Cable



614500 See Below (a)

614501 See Below (b)

614510 See Below (c)

614511 See Below (d)

6145--

Oval Cable Sleeves

Material: Alluminium

Unit: Bag (100)



Suitable for:

- (a): 3mm Diameter Cable
- (b): 4mm Diameter Cable
- (c): 5mm Diameter Cable
- (d): 6mm Diameter Cable



616000 See Below (a)

616001 See Below (b)

616010 See Below (c)

616011 See Below (d)

6160--

Round Cable Sleeve

Material: Alluminium

Unit: Bag (100)



Suitable for:

- (a): 3mm Diameter Cable
- (b): 4mm Diameter Cable
- (c): 5mm Diameter Cable
- (d): 6mm Diameter Cable



615000

Bench Swager

Material: Steel

Unit: Piece (1)



Suitable for: 3mm to 5mm Cable



615001

Hand Held Swager

Material: Steel

Unit: Piece (1)



Suitable for: 3mm to 5mm Cable



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**615050****Hand Held Cable Cutter****Material:** Steel / PVC Grip**Unit:** Piece (1)**Max. Cable Diameter:** 5mm**615051****Hand Held Cable Cutter****Material:** Cast Steel**Unit:** Piece (1)**Max. Cable Diameter:** 7mm

Length:

501025 3500mm**501035** 4000mm**501055** 5000mm**501045** 4500mm**501065** 6000mm**5010--****25.4mm (1") Solid Shaft****Material:** Galvanised / Solid Steel**Unit:** Piece (1)**Key Way:** 1/4"**Suitable for:**

Keysteels: 505000, 505001, 505002



Length:

501029 3000mm**501031** 4000mm**501032** 3500mm**501033** 4500mm**5010--****25.4mm (1") Hollow Shaft****Material:** Galvanised / Steel**Unit:** Piece (1)**Key Way:** 1/4"**Suitable for:**



Keysteels: 505004, 505005


**501086****40mm Keyed Shaft****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 6500mm**501088****35mm Hollow Shaft****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 4800mm


**501094****35mm Hexagonal Hollow Shaft****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 4800mm**502060****31.75mm (1 1/4") Galvanised Shaft****Material:** Galvanised / Solid Steel**Unit:** Piece (1)**Length:** 6000mm**Key Way:** 1/4"**Suitable for:**

Keysteels: 505000, 505001, 505002

**503000****Fixed Shaft Connector****Material:** Aluminium**Unit:** Piece (1)**Application:** Non-Adjustable**503010****Heavy Duty Centre Coupling****Material:** Cast / Galvanised Steel**Unit:** Piece (1)**Application:** Non-Adjustable**Suitable for:** 25.4mm (1") Shaft**Suitable for:** 25.4mm (1") Shaft

**503015****Heavy Duty Centre Coupling****Material:** Cast / Galvanised Steel**Unit:** Piece (1)**Application:** Non-Adjustable**Suitable for:** 31.75mm (1¼") Shaft**503050****'C' Type Hexagonal Shaft Connector****Material:** Aluminium**Unit:** Piece (1)**Application:** Non-Adjustable**Suitable for:** 35mm Hexagonal Shaft**503060****Fixed Shaft Connector****Material:** Aluminium**Unit:** Piece (1)**Application:** Non-Adjustable**Suitable for:** 501088 (35mm Shaft)**504000****Heavy Duty Centre Coupling****Material:** Galvanised / Cast Steel**Unit:** Piece (1)**Application:** Adjustable**Suitable for:** 25.4mm (1") Shaft

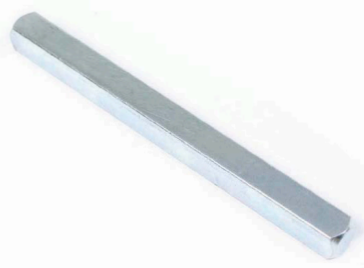**504005****Heavy Duty Centre Coupling****Material:** Cast Steel**Unit:** Piece (1)**Application:** Adjustable**Suitable for:** 40mm Shaft**504010****Heavy Duty Centre Coupling****Material:** Galvanised / Cast Steel**Unit:** Piece (1)**Application:** Adjustable**Suitable for:** 31.75mm (1¼")**505000****Bent Square Key****Material:** Galvanised Steel**Unit:** Pack (10)**Dimensions:** 75mm Long x ¼" Width x ¼" Height**Suitable for:** Securing springs and cable drums to solid shaft**505001****Straight Square Key****Material:** Galvanised Steel**Unit:** Pack (10)**Dimensions:** 75mm Long x ¼" Width x ¼" Height**Suitable for:** Securing springs and cable drums to solid shaft

**505002****Bent Square Key****Material:** Galvanised Steel**Unit:** Pack (10)**Dimensions:** 110mm Long x ¼" Width x ¼" Height**Suitable for:** Securing springs and cable drums to solid shaft**505004****Bent Rectangular Key****Material:** Galvanised Steel**Unit:** Pack (10)**Dimensions:** 75mm Long x ⅜" Width x ¼" Height**Suitable for:** Securing springs and cable drums to hollow shaft**505005****Straight Rectangular Key****Material:** Galvanised Steel**Unit:** Pack (10)**Dimensions:** 75mm Long x ⅜" Width x ¼" Height**Suitable for:** Securing springs and cable drums to hollow shaft**5025--****Hexagonal Shaft Adaptor - Internal****Material:** Steel**Unit:** Piece (1)

Size (Hex Side):

502500 27mm**502510** 25mm**Suitable for:** Converting hexagonal shafts down to 25.4mm

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**502515****Shaft Adaptor****Material:** Cast / Galvanised Steel**Unit:** Piece (1)**Suitable for:** Converting hexagonal shafts down to 25.4mm**502525****Shaft Adaptor****Material:** Cast / Galvanised Steel**Unit:** Piece (1)**Suitable for:** Converting 31.75mm (1¼") shaft down to 25.4mm (1") shaft**502530****Shaft Adaptor****Material:** Cast / Galvanised Steel**Unit:** Piece (1)**Suitable for:** Converting 35.2mm shaft down to 25.4mm shaft**502535****Shaft Adaptor****Material:** Cast / Galvanised Steel**Unit:** Piece (1)**Suitable for:** Converting 40.2mm shaft down to 25.4mm shaft

**504020****Shaft Collar****Material:** Galvanised Steel**Unit:** Piece (1)**Internal Diameter:** 25.4mm**External Diameter:** 40mm**Suitable for:** 25mm (1") shaft**504040****Split Shaft Collar****Material:** Galvanised Steel**Unit:** Piece (1)**Internal Diameter:** 25.4mm**External Diameter:** 40mm**Suitable for:** 25mm (1") shaft

**509010****Bearing****Material:** Steel**Unit:** Piece (1)**Internal Diameter:** 25.6mm**External Diameter:** 50.8mm**Suitable for:** All Indupart bearing plates**509011****Bearing****Material:** Steel**Unit:** Piece (1)**Internal Diameter:** 31.8mm**External Diameter:** 50.8mm**Suitable for:** All Indupart bearing plates**509021****Bearing Plate Retainer****Material:** Galvanised Steel**Unit:** Piece (1)**Internal Diameter:** 51mm**Suitable for:**

Bearings: 509010, 509011


Bearing Plates: All types

Requires: x2 306021 nuts**506000****86mm Bearing Plate - With 25.4mm Bearing****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 86mm

**506001****86mm Bearing Plate - Open****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 86mm**Suitable for:**


Bearings: 509010, 509011

Bearing Plate Retainer: 509021

**506010****111mm Bearing Plate - With 25.4mm Bearing****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 111mm**506011****111mm Bearing Plate - Open****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 111mm**Suitable for:**

Bearings: 509010, 509011



Bearing Plate Retainer: 509021

**506020****127mm Bearing Plate - With 25.4mm Bearing****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 127mm

**506021****127mm Bearing Plate - Open****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 127mm**Suitable for:**

Bearings: 509010, 509011

Bearing Plate Retainer: 509021

**506030****152mm Bearing Plate - With 25.4mm Bearing****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 152mm**506030S****152mm Bearing Plate - With 31.75mm Bearing****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 152mm**506031****152mm Bearing Plate - Open****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 152mm**Suitable for:**

Bearings: 509010, 509011

Bearing Plate Retainer: 509021

**506035****190mm Bearing Plate - Closed****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 190mm**Suitable for:**

Bearings: 509010, 509011

Bearing Plate Retainer: 509021

**509022****Adjustable Bearing Plate - Left Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**


Bearings: 509010, 509011

Bearing Plate Retainer: 509021

**509023****Adjustable Bearing Plate - Right Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Bearings: 509010, 509011

Bearing Plate Retainer: 509021

**506020****'Duplex' Bearing Plate****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 152mm**Suitable for:** Duplex springs when inner spring is longer than the outer spring



0161 432 6655




sales@indupart.co.uk




www.indupart.co.uk

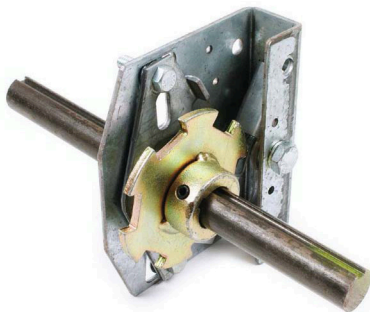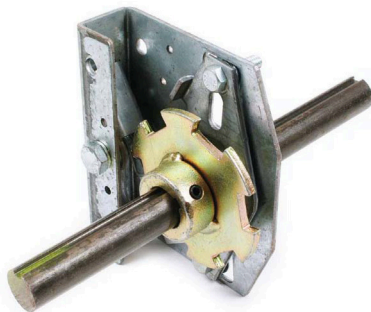
**507000****Spring Brake Device - RHW****Material:** Galvanised Steel / Cast Steel**Unit:** Piece (1)**Shaft Diameter:** 25.4mm (1")**Heart-to-Heart:** 86mm**Suitable for:** LHW 95mm internal diameter springs**507010****Spring Brake Device - LHW****Material:** Galvanised Steel / Cast Steel**Unit:** Piece (1)**Shaft Diameter:** 25.4mm (1")**Heart-to-Heart:** 86mm**Suitable for:** RHW 95mm internal diameter springs**507020****Adjustable Plate For Spring Brakes****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 86mm - 152mm**Suitable for:**
Spring Brake Devices: 507000, 507010**507025****Adjustable Plate For Spring Brakes****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 86mm - 152mm**Suitable for:** 508000, 508010 Spring Brake Device (when combined with 508020)

**507040** Left Hand**507045** Right Hand**50704-****Spring Brake Device - Hexagonal****Material:** Galvanised Steel**Unit:** Piece (1)**Centre Distance:** 86mm**Shaft Diameter:** 35mm Hexagonal

Suitable for: If centre distance is greater than 86mm, use 507020 (95mm) or 507025 (152mm)

**507060** Left Hand**507065** Right Hand**50706-****Spring Brake Device - 35mm****Material:** Galvanised Steel / Cast Steel**Unit:** Piece (1)**Centre Distance:** 86mm**Shaft Diameter:** 35mm Round

Suitable for: If centre distance is greater than 86mm, use 507020 (95mm) or 507025 (152mm)


**507080** Left Hand**507085** Right Hand**50708-****Spring Brake Device - 40mm****Material:** Galvanised Steel / Cast Steel**Unit:** Piece (1)**Centre Distance:** 86mm**Shaft Diameter:** 40mm Round

Suitable for: If centre distance is greater than 86mm, use 507020 (95mm) or 507025 (152mm)

**508020****Reinforcement Plate****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 160mm

Suitable for: Spring brake devices: 508000, 508010 (when combined with 507025)





508000 (a) See Below

508012 (b) See Below

5080--

Spring Brake Device - RHW

Material: Galvanised Steel / Cast Steel

Unit: Piece (1)

Shaft Diameter:


(a): 25.4mm (1")

(b): 31.75mm (1¼")

Heart-to-Heart: 86mm



Suitable for: LHW 152mm internal diameter springs



508010 (a) See Below

508014 (b) See Below

5080--

Spring Brake Device - LHW

Material: Galvanised Steel / Cast Steel

Unit: Piece (1)

Shaft Diameter:



(a): 25.4mm (1")



(b): 31.75mm (1¼")

Heart-to-Heart: 86mm





Suitable for: RHW 152mm internal diameter springs

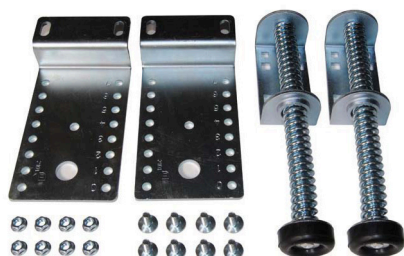**708001****Pusher Springs****Material:** Galvanised Steel**Unit:** Pair (2)**Length:** 220mm**708002****Pusher Springs****Material:** Galvanised Steel**Unit:** Pair (2)**Length:** 220mm**708011****Pusher Springs****Material:** Galvanised Steel**Unit:** Pair (2)**Length:** 500mm**708012****Pusher Springs****Material:** Galvanised Steel**Unit:** Pair (2)**Length:** 500mm

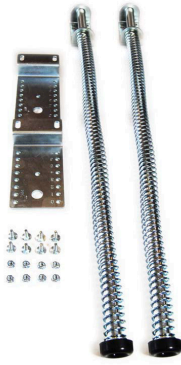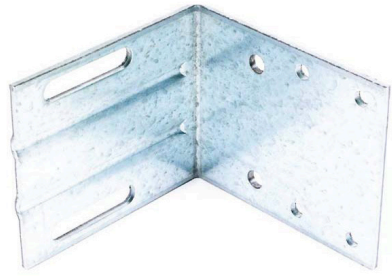**708015****Pusher Springs****Material:** Galvanised Steel**Unit:** Pair (2)**Length:** 750mm**708016****'L' Shaped Mounting Plate****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Pusher Springs: 708002, 708012

**708021****Mounting Plate****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**Pusher Springs: 708001, 708011,
708015

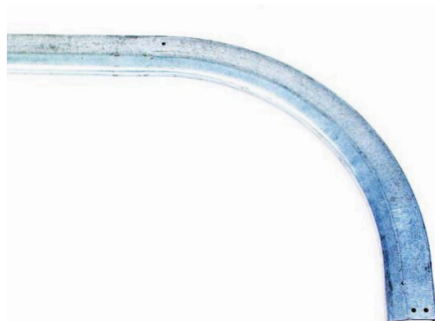**702000****51mm (2") Slotted Side Track****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 6150mm**Suitable for:** 51mm rollers**703000** 6000mm**703003** 3500mm**703004** 4500mm**703065** 6500mm**7030--****51mm (2") Side Track****Material:** Galvanised Steel**Unit:** Piece (1)**Thickness:** 2mm**Suitable for:** 51mm rollers**703010****76mm (3") Side Track****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 5180mm**Thickness:** 2.8mm**Suitable for:** 76mm rollers**703020****76mm (3") Track Curve****Material:** Galvanised Steel**Unit:** Pair (2)**Length:** 4550mm**Inside Diameter (Curve):** 380mm**Thickness:** 2.8mm**Suitable for:** 76mm rollers

0161 432 6655



sales@indupart.co.uk




www.indupart.co.uk

FTR Pitch:

705035	5 degree
705040	10 degree
705045	15 degree
705050	20 degree
705055	28 degree

**7050--****Pre-Assembled Radius Curve****Material:** Galvanised Steel**Unit:** Pair (2)**Suitable for:** Low-headroom Doors**Length before bend:**

705000	1500mm
705001	3000mm
705002	3500mm
705003	4000mm
705004	4500mm
705005	5000mm

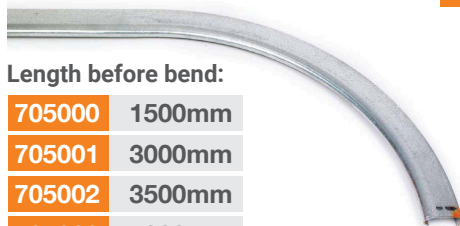**70500-****51mm (2") Track Radius Curve****Material:** Galvanised Steel**Unit:** Pair (2)**Inside Diameter (Curve):** 380mm**Thickness:** 2mm**Suitable for:** 51mm rollers**705030****90 Degree Pre-Assembled Radius Curve****Material:** Galvanised Steel**Unit:** Pair (2)**Radius:** 90 degree**Suitable for:** Low-headroom Doors

710000	See Below (a)
710035	See Below (b)
710060	See Below (c)

7100--**Support Angle For Horizontal Track****Material:** Galvanised Steel**Unit:** Piece (1)**Thickness:** (a / b): 2.5mm (c): 3mm**Sizes:**

- (a) 40mm x 40mm x 6000mm long
- (b) 40mm x 40mm x 3500mm long
- (c) 50mm x 50mm x 6000mm long



710045 See Below (a)

710055 See Below (b)

7100--

Punched Angle

Material: Galvanised Steel

Unit: Piece (1)

Length: 3000mm


Thickness: (a): 2.5mm (b): 3mm



Dimensions:

(a) 40mm x 40mm

(b) 50mm x 50mm



Lengths:

704000 3500mm

704010 4500mm

704020 6000mm

704021 6500mm

7040--

Folded Leg Jamb Angle

Material: Galvanised Steel

Unit: Piece (1)


Thickness: 2mm

Dimensions: 90mm x 62mm



Suitable for:

Side Seals: 704035, 704039, 704040, 704041

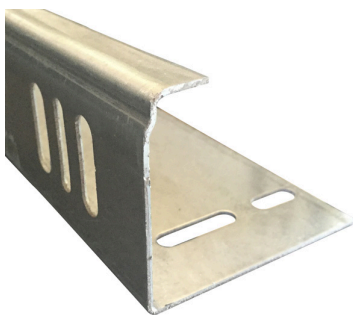

704028

Slotted Jamb Angle

Material: Galvanised Steel


Unit: Piece (1)

Length: 6100mm



Suitable for:

Side Seal: 704072

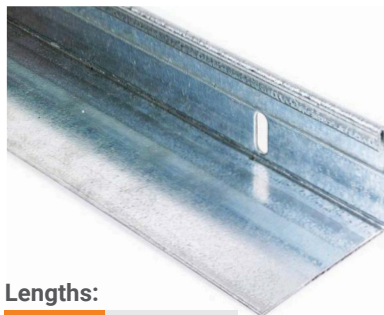

Lengths:

704030 6500mm

704032 4500mm

70403-

Large Folded Leg Jamb Angle

Material: Galvanised Steel

Unit: Piece (1)

Thickness: 2mm

Dimensions: 90mm x 85mm



Suitable for:

Side Seals: 704035, 704039, 704040, 704041



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk




Lengths:

704100 3500mm

704110 4500mm

704120 6000mm

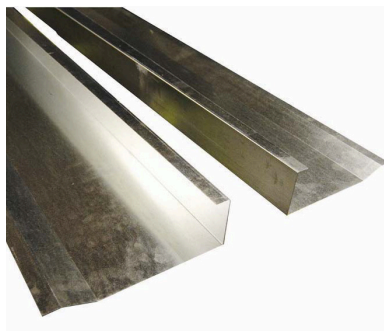

7041--

Thin Leg Jamb Angle

Material: Galvanised Steel

Unit: Piece (1)

Thickness: 2mm

Dimensions: 100mm x 63mm



Suitable for:

Side Seal: 704025

509028

Low Level Track Guards

Material: Galvanised Steel


Unit: Pair (2)

Dimensions:

Depth: 270mm

Width: 85mm

Length: 2750mm

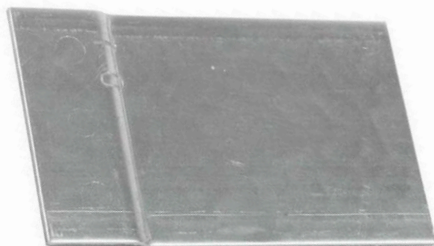

Lengths:

707500 100mm

707510 120mm

707520 130mm

707530 150mm

707540 180mm

7075--

Track Connecting Plate


Material: Galvanised Steel

Unit: Pack (20)

Thickness: 2mm



Suitable for: Joining side track to jamb angle

**707700****Track Joining Clip****Material:** Cast Steel**Unit:** Piece (1)**Suitable for:** Connecting vertical track section to horizontal curve**Lengths:****710070** 3500mm**710080** 6500mm**7100--****'C' Profile****Material:** Galvanised Steel**Unit:** Piece (1)**Thickness:** 2mm**Dimensions:** 53mm x 18mm x 12mm**Suitable for:** Strengthening horizontal track**710090****Hanging Plate For 'C' Profile****Material:** Galvanised Steel**Unit:** Piece (1)**Dimensions:** 25mm x 53mm x 7mm**Suitable for:**
'C' Profile: 710070, 710080**710095****Hanging Plate For 'C' Profile - With M8 Bolt****Material:** Galvanised Steel**Unit:** Piece (1)**Dimensions:** 25mm x 53mm x 7mm**Suitable for:**
'C' Profile: 710070, 710080

0161 432 6655




sales@indupart.co.uk



www.indupart.co.uk

**710100****'C' Profile****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 6150mm



089246 2mm wall x 80mm x 40mm x 7000mm

089250 3mm wall x 100mm x 100mm x 7000mm

0892--

Box Section For Low Level Springs

Material: Galvanised Steel

Unit: Piece (1)



Note: If required, different sizes can be ordered.




509030

Spring Support Console - Left Hand

Material: Galvanised Steel

Unit: Piece (1)



509031

Spring Support Console - Right Hand

Material: Galvanised Steel

Unit: Piece (1)



Suitable for: Vertical Lift Doors / High Lift Doors

Doors: 0 - 5000mm Opening Width

Combine With:

Spring Support Console: 509031



Suitable for: Vertical Lift Doors / High Lift Doors

Doors: 0 - 5000mm Opening Width

Combine With:

Spring Support Console: 509030




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

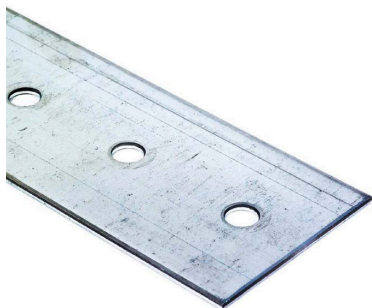**509033****Support Console Backing Plate****Material:** Galvanised Steel**Unit:** Piece (1)**Dimensions:** 500mm x 73mm**Suitable for:**

Spring Support Consoles: 509031, 509030

Doors: 0 - 4000mm Opening Width

**509035****Heavy Duty Spring Support Console****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:** Vertical Lift Doors / High Lift Doors

Doors: 5001mm - 7000mm Opening Width

**509040****Angle Bracket For Support Consoles****Material:** Steel**Unit:** Piece (1)**Suitable for:** Vertical Lift Doors / High Lift Doors

Doors: 4001 - 5000mm Opening Width

**509042****Console Bracket****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Box Section: 089246



0161 432 6655




sales@indupart.co.uk




www.indupart.co.uk

**509045****Box Section Connect Plate****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Box Section: 089250

**509047****Low Headroom Console Bracket - Left Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:** Low Headroom Doors

Box Section: 089246

**509048****Low Headroom Console Bracket - Right Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:** Low Headroom Doors

Box Section: 089246

**609052****Low Headroom Connecting Plate****Material:** Galvanised Steel**Unit:** Piece (1)**Dimensions:**

Depth: 17mm

Width: 108mm

Length: 220mm



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

Did you know?



Indupart Training offers a variety of courses including:

Sectional Overhead & Roller Shutter Door Installation



Find out more at
www.induparttraining.co.uk

Roller Shutter Lath & Components

Pages **177 - 199**

Standard Lath & Endlocks	Pages 177 - 179
Insulated Lath & Endlocks	Pages 180 - 181
Bottom Rails, Seals & Retainers	Pages 182 - 184
Guides & Angles	Pages 185 - 188
Bearings, Sprockets & Components	Pages 189 - 192
Wicket Doors, Locks & Lock Components	Pages 193 - 195
End Plates	Page 196
Barrel Tubes & General Steel	Page 197
Fusible Links & Components	Pages 198 - 199



001880 8000mm long

001884 4000mm long

00188-

18swg 76mm (3") Solid Lath

Material: Galvanised steel

Unit: Piece (1)

Size: See above




Suitable for:

Endlocks: 010000, 010001, 010003
Windlock: 010002ZP

Powder Coating:

Available to any RAL colour on request

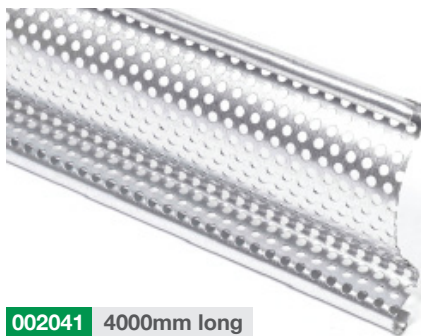

002041 4000mm long

002076 7500mm long

0020--

20swg 76mm (3") Perforated Lath

Material: Galvanised steel

Unit: Piece (1)

Size: See above




Suitable for:

Endlocks: 010000, 010001, 010003
Windlock: 010002ZP

Powder Coating:

Available to any RAL colour on request

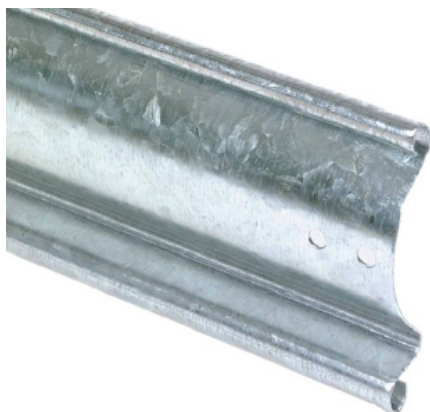

002235 22swg x 3500mm long

002240 22swg x 4000mm long

002245 22swg x 4500mm long

002250 22swg x 5000mm long

002255 22swg x 5500mm long

002260 22swg x 6000mm long

002265 22swg x 6500mm long

002035 20swg x 3500mm long

002039 20swg x 4000mm long

002050 20swg x 5000mm long

002060 20swg x 6000mm long

002065 20swg x 6500mm long

002---

20/22swg 76mm (3") Solid Lath

Material: Galvanised steel

Unit: Piece (1)

Size: See above



Suitable For:

Endlocks: 010000, 010001, 010003
Windlocks: 010002ZP

Powder Coating:

Available to any RAL colour on request




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

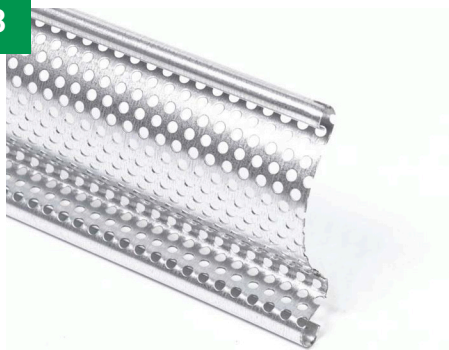**002266****22swg 76mm (3") Perforated Lath****Material:** Galvanised steel**Unit:** Piece (1)**Size:** 6500mm**Suitable for:**

Endlocks: 010000, 010001, 010003

Windlock: 010002ZP

Powder Coating:

Available to any RAL colour on request

**01002ZP****Windlocks - Standard Lath****Material:** Zinc plated steel**Unit:** Pair (2)**Suitable for:**

Galvanised Lath: All 76mm (3")

**010000****Endlocks - Standard Lath****Material:** Black Nylon**Unit:** Pair (2)**Suitable for:**

Galvanised Lath: All 76mm (3")

**010001****Endlocks - Standard Lath****Material:** Cast Steel**Unit:** Pair (2)**Suitable for:**

Galvanised Lath: All 76mm (3")



0161 432 6655



sales@indupart.co.uk




www.indupart.co.uk

**010003****Endlocks - Standard Lath****Material:** Pressed steel**Unit:** Pair (2)**307295****Pop Rivets****Material:** Carbon Steel / Zinc**Unit:** Bag (100)**Size:** M5**Design:** Dome Head**Suitable for:**

Galvanised Lath: All 76mm (3")

**Drill Range:**



1.0mm - 6.0mm

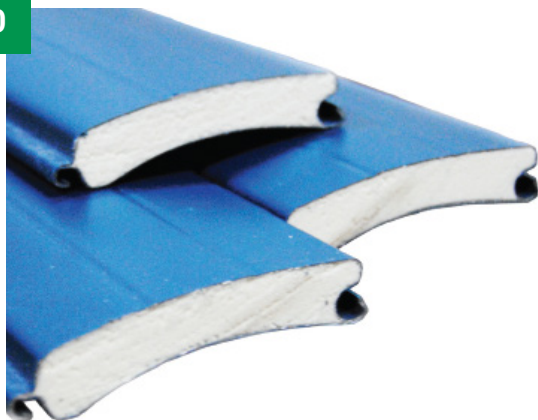**Available colours:**

Pre Galv	Poppy Red
Olive Green	Goosewing
Van Dyke	Grey
Brown	Juniper Green
Merlin Grey	Black
Solent Blue	Aztec Yellow
White	Heritage Green
Ocean Blue	Mushroom
Sargasso	Moorland Green

0030--**77mm Thick Foam Injected Insulated Lath****Material:** Galvanised / Coated Steel**Unit:** Piece (1)**Size:** 20mm thick**Suitable for:**

Endlocks: 003100, 003100M

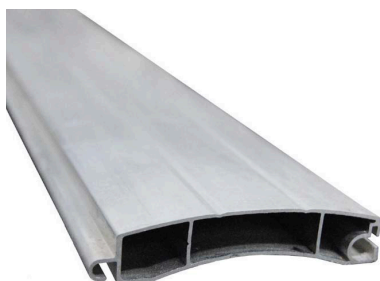Order by request only

*Inserts not included

003200**Bottom Rail - Insulated Lath****Material:** Aluminium**Unit:** Piece (1)**Size:** 7000mm**Suitable for:**Insulated Lath: 0030--
Rubber: 003220**003300****R/S Window Section - Insulated Lath****Material:** Aluminium**Unit:** Piece (1)**Size:** 7000mm**Suitable for:**Insulated Lath: 0030--
Perspex Sheet: 003320

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



003100M Machine Type

003320**Plastic Infill - R/S Window Section****Material:** Perspex**Unit:** Linear Metre**Suitable for:**

R/S Window Section: 003300

003100**Endlocks - Insulated Lath****Material:** Black Plastic**Unit:** Pair (2)**Suitable for:**


Insulated Lath: 0030--

**003101****Endlocks - Bottom Rail****Material:** Black Plastic**Unit:** Pair (2)**Suitable for:**

Bottom Rail: 003200

003105**Endlocks - R/S Window Section****Material:** Black plastic**Unit:** Pair (2)**Suitable for:**

Window Section: 003300

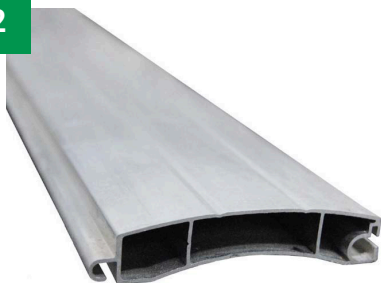**003200****Bottom Rail - Insulated Lath****Material:** Aluminium**Unit:** Piece (1)**Size:** 7000mm**Suitable for:**Insulated Lath: 0030--
Rubber: 003220**020025****T' Section Bottom Rail****Material:** Galvanised steel**Unit:** Piece (1)**Size:** 8000mm**020026****'L' Section Bottom Rail****Material:** Galvanised steel**Unit:** Piece (1)**Size:** 8000mm**020027****Steel Quirk Strip****Material:** Galvanised steel**Unit:** Piece (1)**Size:** 8000mm

**003220****Black Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainers: 003200

**208015****Extra Deep Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Seal Retainers: 204013, 204014,
204009, 204010, 204012, 204080
Bungs: 208065 (Pneumatic) 208055
(Optical)

**704056****'D' Type Bottom Seal****Material:** EPDM**Unit:** Roll (10 Metre)**Suitable for:**

Bottom Rail: 020025

**204080****Flat Bottom Seal Retainer****Material:** Aluminium**Unit:** Piece (1)**Size:** 6000mm long x 40mm thick**Suitable for:**

Top Seal: 206011, 206012
Bottom Seal: 208011, 208015
T Rail: 020025 or L Rail: 020026 (Using
307295 to connect)



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**208070****Steel Bottom Retainer****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 6000mm**Suitable for:**

Rubber Seal: 208080


T Rail: 020025 or L Rail: 020026 (Using 307295 to connect)

**208080****Rubber Bottom Seal****Material:** EPDM**Unit:** Linear Metre**Suitable for:**

Steel Retainer: 208070

Bungs: 208055 (Optical), 208065 (Pneumatic)



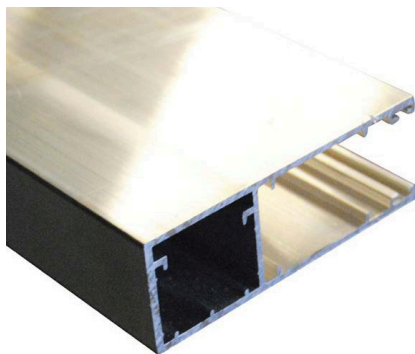

003400	5000mm long
--------	-------------

003410	7000mm long
--------	-------------

0034--

Guide Channel For Insulated Lath

Material: Aluminium

Unit: Piece (1)

Depth: 95mm

Length: See above



Suitable for:

Insulated Lath: 0030--

Brush Seal: 0034--



003440	Standard brush seal
--------	---------------------

003460	Split brush seal (pictured)
--------	-----------------------------

0034--

Brush Seal For Guide Channel

Material: Nylon Brush

Unit: Linear Metre

Depth:

003440: 5mm

003460: 10mm



Suitable for:

Guide Channel: 0034--



063080 Mild Steel

063180 Galvanised Steel

063---


63mm Guide Channel

Material: Mild OR Galvanised Steel

Unit: Piece (1)

Size: 63mm x 8000mm

Finish: See above



063280

63mm Wind Guide Channel

Material: Mild Steel

Unit: Piece (1)

Size: 63mm x 8000mm



063380

100mm Wind Guide Channel

Material: Mild steel

Unit: Piece (1)

Size: 100mm x 8000mm



089080

89mm Guide Channel

Material: Mild Steel

Unit: Piece (1)

Size: 8000mm



Suitable for:
Roller Shutters





089180

100mm Guide Channel**Material:** Galvanised Steel**Unit:** Piece (1)**Size:** 8000mm**Suitable for:**
Roller Shutters**075050** 50mm x 50mm x 6mm**075080** 75mm x 50mm x 6mm**075100** 100mm x 50mm x 6mm**075110** 80mm x 80mm x 6mm

075---

Steel Angle**Material:** Mild Steel**Unit:** Piece (1)**Length:** 6000mm**Suitable for:**
Roller Shutters

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



075120 125mm x 75mm x 8mm

075125 100mm x 75mm x 8mm

075078

Steel Angle

Material: Galvanised steel

Unit: Piece (1)

Size: 75mm x 50mm x 3mm

Length: 8000mm



Suitable for:
Roller Shutters

07512-

Steel Angle - L

Material: Mild steel

Unit: Piece (1)

Length: 6000mm



Suitable for:
Roller Shutters



075130

Steel Angle - XL

Material: Mild steel

Unit: Piece (1)

Size: 150mm x 75mm x 10mm

Length: 6000mm



Suitable for:
Roller Shutters





090700 30mm

090710 40mm

0907--

Pedestal Bearing

Material: Cast Iron

Unit: Piece (1)



090750

30mm Flange Mounted Bearing

Material: Cast Iron

Unit: Piece (1)



509012

Heavy Duty Bearing

Material: Steel

Unit: Piece (1)

Inside Diameter: 25.4mm (1")



509013

Heavy Duty Bearing

Material: Steel

Unit: Piece (1)

Inside Diameter: 31.75mm (1¼")



Shaft Diameter:

909017 25.4mm (1") bore

909018 30mm bore

90901-

38 Tooth Sprocket

Material: Steel

Unit: Piece (1)

Pitch: $\frac{1}{2}" \times \frac{5}{16}"$



Suitable for:

Drive Chain: 909030



909019

18 Tooth Sprocket

Material: Steel

Unit: Piece (1)

Pitch: $\frac{1}{2}" \times \frac{5}{16}"$

Shaft Diameter: 25.4mm (1")



Suitable for:

Drive Chain: 909030



Shaft Diameter:

909020 25.4mm (1") bore

909021 25mm bore

909022 30mm bore

90902-

18 Tooth Sprocket

Material: Steel

Unit: Piece (1)

Pitch: $\frac{1}{2}" \times \frac{5}{16}"$



Suitable for:

Drive Chain: 909030



Shaft Diameter:

909023 25.4mm (1") bore

909024 30mm bore

909025 31.75mm (1 $\frac{1}{4}"$) bore

90902-

30 Tooth Sprocket

Material: Steel

Unit: Piece (1)

Pitch: $\frac{1}{2}" \times \frac{5}{16}"$



Suitable for:

Drive Chain: 909030



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk


**9090650****Roller Shutter Safety Brake****Material:** Steel**Unit:** Piece (1)**Temperature Range:** -30 - 85°C**Maximum Bore:** 30mm**Maximum Torque:** 322Nm**Protection Rating:** IP65**909028****19 Tooth Pinion - 6DP****Material:** Steel**Unit:** Piece (1)**Shaft Diameter:** 25.4mm (1")**909029****12 Tooth Pinion - 5DP****Material:** Steel**Unit:** Piece (1)**Shaft Diameter:** 25.4mm (1")**909030****Drive Chain****Material:** Steel**Unit:** Piece (1)**Pitch:** 1/2" x 5/16"**Suitable for:**

Sprockets: 90901-, 909019, 90902- (18t), 90902- (30t)

**909040****Split Link****Material:** Steel**Unit:** Piece (1)**Pitch:** $\frac{1}{2}$ " x $\frac{5}{16}$ "**Suitable for:**

Drive Chain: 909030



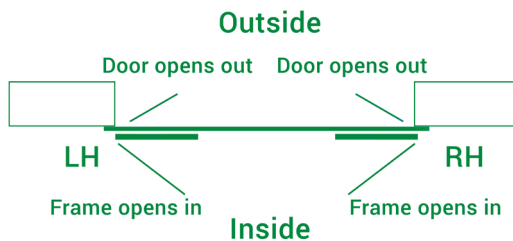

Handing:

906650L Left Hand

906650R Right Hand

Handing:

906651L Left Hand

906651 R Right Hand

906650-

Standard Roller Shutter Wicket Gate

Unit: Piece (1)

Frame Size: 770mm x 1770mm

Clear Opening: 565mm x 1605mm

Order by request only



Frame opens inwards
Door opens outwards

906651-

Euro Roller Shutter Wicket Gate

Unit: Piece (1)

Frame Size: 1005mm x 2000mm

Clear Opening: 800mm x 1830mm

Order by request only



Frame opens inwards
Door opens outwards



109070

Emergency Push Pad

Material: Coated Steel

Unit: Piece (1)

Handing: Universal



Suitable for:
Sectional Doors, Roller Shutters



801040

Bullet Pin Lock With Housing


Material: Nickel Plated (Cylinder) / Cast Steel (Housing)

Unit: Piece (1)

Pin Length: 47mm

House Projection: 43mm

Pin Diameter: 20mm x 13mm Oval

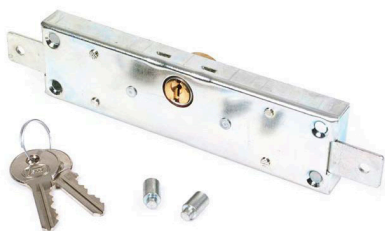**801045****Small Centre Lock**

Material: Brass Cylinder / Galvanised Steel Base

Unit: Piece (1)

Cylinder Projection: 15mm

Steel Base: Depth 15mm x Width 42mm x Length 156mm

**801060****Ground Lock Kit For Roller Shutters**

Material: Brass Cylinder / Galvanised Steel Base

Unit: Set (1)




Suitable for:
Roller Shutters

**906650N****Standard Night Latch With Cylinder**

Material: Coated Steel

Unit: Set (1)

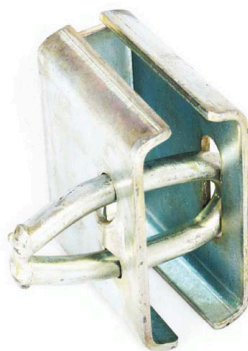**801030****Padlockable Chain Cleat**

Material: Galvanised Steel

Unit: Piece (1)



Suitable for:
Door thickness of 57mm / 54mm (if finger pull fitted)



Suitable for:
Hand Chain: 801020, 907113



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**801031****Standard Chain Cleat****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Hand Chain: 801020, 907113



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



076000	300mm x 300mm x 3mm
076010	350mm x 350mm x 5mm
076020	400mm x 400mm x 5mm
076025	260mm x 260mm x 5mm
076030	350mm x 350mm x 12mm
076035	320mm x 320mm x 5mm
076050	400mm x 400mm x 12mm
076070	450mm x 450mm x 16mm
076095	500mm x 500mm x 8mm

076---

Square End Plate**Material:** Mild Steel**Unit:** Piece (1)**Complete with Taper & Cut Outs:**

076095

Suitable for:
Roller Shutters

076040	350mm x 600mm x 10mm
076060	400mm x 700mm x 10mm
076080	450mm x 725mm x 14mm

0760--

Rectangular End Plate**Material:** Mild Steel**Unit:** Piece (1)**Suitable for:**
Roller Shutters



089204	See Below (a)
--------	---------------

089214	See Below (b)
--------	---------------

089216	See Below (c)
--------	---------------

089260	See Below (d)
--------	---------------

0892--

Steel Tube

Material: Mild Steel

Unit: Piece (1)


Sizes:

(a): 101.6mm x 3.7mm x 6000mm-12000mm long

(b): 127mm x 3.2mm x 6000mm-1200mm long

(c): 139.7mm x 5mm x 6000mm-1200mm long

(d): 168.3mm x 5mm x 6000mm-12000mm long



089230	See Below (a)
--------	---------------

089231	See Below (b)
--------	---------------

089233	See Below (c)
--------	---------------

089238	See Below (d)
--------	---------------



08923-

Steel Flat Bar

Material: Mild Steel

Unit: Piece (1)

Length: 6000mm

Sizes:

(a): 50mm x 8mm

(b): 40mm x 5mm

(c): 100mm x 8mm

(d): 80mm x 6mm

089240

Roller Shutter Box Section

Material: Mild Steel

Unit: Piece (1)

Size: 50mm x 50mm x 4mm x 7600mm

**010100****Large Fusible Link****Material:** Steel**Unit:** Piece (1)**Length:** 82mm**Max Temperature:** 72°C**Max Hold Weight:** 75kg**066520****Pressed Pull Handle****Material:** Pressed Steel**Unit:** Piece (1)**066522****Finger Pull Handle****Material:** Cast Steel**Unit:** Piece (1)**090100****Lockable Protection Box For Key Switch****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Key Switch: 908045



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



090800 30mm Bore

090810 40mm Bore

0908--

Spacer Collar

Material: Mild Steel

Unit: Piece (1)

High Speed Door Curtains & Components

Pages **202 - 219**

ALBANY Parts | Pages 202 - 208

IPR Parts | Pages 209 - 219

Curtain Replacements

Available by Request for our
High Speed Doors



Full curtain replacements are available at competitive prices

We have all the details you need,
give us a call or send us an email:



0161 432 6655



sales@indupart.co.uk



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



3 Pin

940020**3 Pin Proximity Switch****Unit:** Piece (1)**Type:** Crash / Knock Out

4 Pin

940030**Y Adaptor - R/H Cable Crash****Unit:** Piece (1)**Range:** 12 Metre**Suitable for:** 3 Pin to 4 Pin Y Adaptor
(x50 R/H Cable Crash)

4 Pin

940040**Y Adaptor - L/H Cable Crash****Unit:** Piece (1)**Range:** 12 Metre

3 Pin

940050**Photocell Transmitter - Red****Material:** Plastic**Unit:** Piece (1)**Type:** Travelling**Suitable for:** 3 Pin to 4 Pin Y Adaptor
(x55 L/H Cable Crash)

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



3 Pin

940060**Photocell Receiver - Yellow****Material:** Plastic**Unit:** Piece (1)**Type:** Travelling

3 Pin

940070**Photocell Receiver - Grey****Material:** Plastic**Unit:** Piece (1)**Type:** Snow

3 Pin

940080**Photocell Transmitter - Blue****Material:** Plastic**Unit:** Piece (1)**Type:** Static

3 Pin

940090**Photocell Receiver - Black****Material:** Plastic**Unit:** Piece (1)**Type:** Static



3 Pin

940100**Proximity Switch****Material:** Plastic**Unit:** Piece (1)**Rating:** IP67**940110****Nylon Pulley Wheel - White****Material:** Nylon**Unit:** Piece (1)**Internal Diameter:** 9mm Bore**External Diameter:** 65mm**Suitable for:** Tension ropes**940120****Steel Damper****Material:** Galvanised Steel**Unit:** Piece (1)**940130****White Curtain Tension Rope****Material:** Nylon**Unit:** Linear Metre**Thickness:** 5mm**Suitable for:** High Speed Doors**Suitable for:** High Speed Doors

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



 4 Pin

940140

Crash Type Connection Cable - 12M

Unit: Piece (1)

Length: 12 Metres



 4 Pin

940150

Crash Type Connection Cable - 6M

Unit: Piece (1)

Length: 6 Metres



 3 Pin

940160

Connection Cable - 12M

Unit: Piece (1)

Length: 12 Metres



 3 Pin

940170

Connection Cable - 6M

Unit: Piece (1)

Length: 6 Metres

**940230****Sliding Block - Standard****Material:** Black Plastic**Unit:** Piece (1)**Dimensions:** 130mm x 48mm x 44mm**940240****Break Out Sliding Block - Crash Type****Material:** Black Plastic**Unit:** Piece (1)**Dimensions:** 129mm x 48mm x 44mm
depth (Maximum)**940250****Blue Curtain Lifting Belt****Material:** Nylon**Unit:** Linear Metre**Width:** 35mm**940260****Yellow Curtain Tension Rope****Material:** Nylon**Unit:** Linear Metre**Thickness:** 7mm**Suitable for:** High Speed Doors**Suitable for:** High Speed Doors

**940270****Nylon Pulley Wheel - Black****Material:** Nylon**Unit:** Piece (1)**Internal Diameter:** 9mm Bore**External Diameter:** 150mm**Suitable for:** Tension ropes**940280****Black Belt Repair Kit****Unit:** Piece (1)**Suitable for:** Side belts on High Speed Doors**940290****PVC Cable Chain****Material:** Black PVC**Unit:** Linear Metre**940300****Frame Stiffener - Right Hand****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:** Right hand column on High Speed Doors



940310

Frame Stiffener - Left Hand

Material: Galvanised Steel
Unit: Piece (1)



Suitable for: Left hand column on High Speed Doors



940320


Bungee Cord


Material: Rubber / Fabric Covering
Unit: Linear Metre
Thickness: 12mm



Suitable for: High Speed Doors

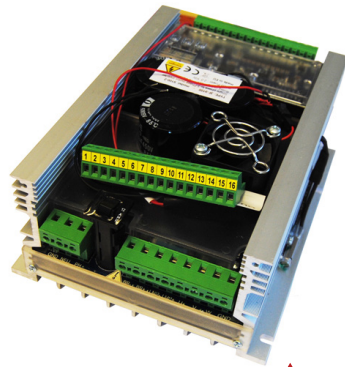

**950100****1-Phase Control Panel****Material:** Electrics / Metal Enclosure**Unit:** Piece (1)**Power:** 230V Single Phase**Suitable for:** High Speed Doors (IPR)**950105****1-Phase Inverter Card****Unit:** Piece (1)**Power Supply:** 230V AC**Output (Safeties):** 24V AC**Protection Rating:** IP55**Suitable for:** 950100, IPR High Speed Door controls**Brake Release:****950113** 1.5kW**950128** 0.75kW**Standard:****950126** 0.75kW**950127** 1.1kW**9501--****IPR High Speed Door Motors****Power:** 400V**Brake Release:** See Above**Output:** See Above

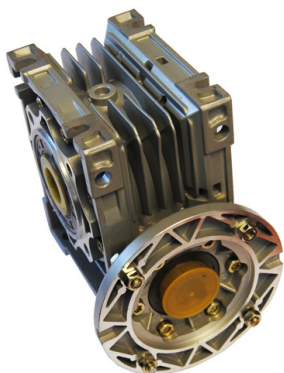

950112	Size 50	1:30 PAM 80
950112B	Size 50	1:28 PAM 71
950112C	Size 50	1:20 PAM 80
950112D	Size 50	1:20 PAM 71
950112E	Size 63	1:40 PAM 80

95011--

Gearbox for IPR Motors

Unit: Piece (1)

Temperature Range: 25°C - + 50°C



Suitable for: IPR Motors on Flexirun Doors, Run Doors, Belt Doors



950110

3-Phase Control Panel


Material: Electrics / Metal Enclosure

Unit: Piece (1)

Power: 400V 3-Phase



Suitable for: IPR High Speed Doors

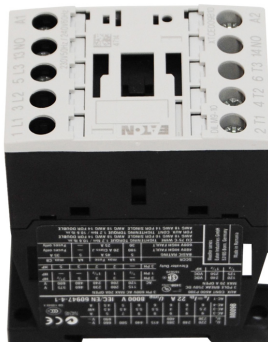

950114

T1/T2 Contractor

Unit: Piece (1)



Suitable for:
Control Panel: 950110, 950100




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**950115****3-Phase Control Card****Unit:** Piece (1)**Power Supply:** 400V AC**Output (Safeties):** 24V AC**Protection Rating:** IP55**Suitable for:**

Control Panel: 950110

**950116****Four Channel Transmitter****Material:** Plastic**Unit:** Piece (1)**Suitable for:**

Radio Card: 950118

**950117****Truck Mount Four Channel Transmitter****Material:** Plastic**Unit:** Piece (1)**Suitable for:**

Radio Card: 950119

**950118****Standard Radio Card****Unit:** Piece (1)**Power:** 12 - 24V DC**Suitable for:**


Control Panel: 950100, 950110

Remote: 950116



Lengths:

950120	Single Channel	50 metres
950123	Double Channel	100 metres

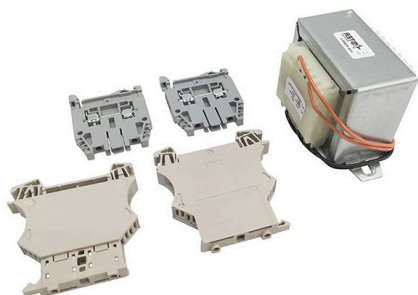
950119**Truck Mount Radio Card****Unit:** Piece (1)**Power:** 12 - 24V DC**Suitable for:**Control Panel: 950100, 950110
Remote: 950117**95012-****Loop Detector Kit****Unit:** Piece (1)**Supply Voltage:** 24V AC/DC**Dimensions:** 22.5mm x 94mm x 88mm**Output Relay (Loop):** max. 240 VAC;
2A / 30 VDC**Output Relay (Alarm):** max. 40 VAC;
0.3A; AC-1**950121****Internal Transformer****Unit:** Piece (1)**Suitable for:**

Control Panel: 950100, 950110

950122**Microwave Rader****Unit:** Piece (1)**Power Supply:** 12 / 24 AC**Range:** 1 - 10m Adjustable**Rating:** IP65**Max. Install Height:** 6 Metres

**950125****Isolator Mains & Key****Unit:** Piece (1)**Suitable for:**

Control Panel: 950100, 950110

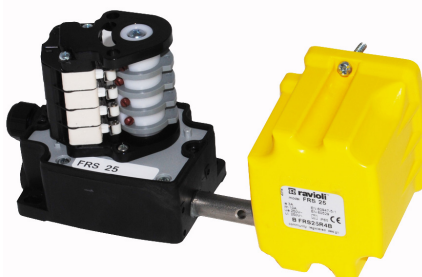**950130****Photocells - Run & Belt Doors****Unit:** Set (1x Transmitter / 1x Receiver)**Power Supply:** 12 / 24 V/DC**Operating Temp:** -10°C to +60°**Protection Rating:** IP55**Suitable for:** Belt / Run Doors (IPR)**Max. Range:** 20 Metres**950132****Compact Photocells - Flexirun Doors****Unit:** Set (1x Transmitter / 1x Receiver)**Power Supply:** 12 / 24 V/DC**Operating Temp:** -10°C to +60°**Protection Rating:** IP55**Suitable for:** Flexirun Doors (IPR)**Max. Range:** 20 Metres**950140****Limit Switch Unit 1:25****Unit:** Piece (1)**Rating:** IP65**Reduction Ratio:** 1:25


0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

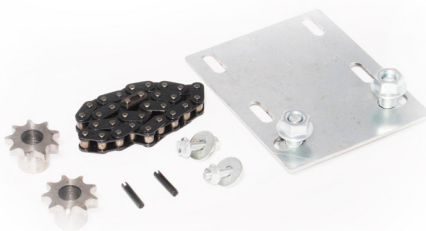**950142****Limit Switch Unit 1:15****Unit:** Piece (1)**Rating:** IP65**Reduction Ratio:** 1:15**950148****Mounting Bracket For Limit Switch****Material:** Steel**Unit:** Piece (1)**Suitable for:**

Limit Switches: 950140, 950142

**950150****Flashing Beacon****Unit:** Piece (1)**Power Supply:** 12 - 24v DC

*Design of rope may differ

950155**Pull Switch with Rope****Unit:** Piece (1)**Protection Rating:** IP67**Operation Voltage:** 400 Vac (50 Hz)**Operation Current:** 3 A**Rope Length:** 3 Metres**Suitable for:**

Control Panels: 950100, 950110



**950160****Wireless Safety Edge Kit****Material:** Plastic Housing**Unit:** Kit (1x Transmitter / 1x Receiver)**Frequency:** 868.90 Mhz**Power Supply:** 3V DC (Trans) / 12/24 Vac/
Dc (Rec)**Rating:** IP65 (Trans) / IP54 (Rec)**Range:** 10 Metres**950161****Wireless Safety Edge Kit****Material:** Plastic Housing**Unit:** Kit (1x Transmitter / 1x Receiver)**Frequency:** 8868.95 Mhz + 869.85 Mhz**Power Supply:** 3V DC (Trans) / 12/24 Vac/
Dc (Rec)**Rating:** IP65**Range:** 25 Metres (Up to 75 Metres under
optimum conditions)**950162****Safety Edge Contact Strip****Material:** EPDM / Conductive EPDM**Unit:** Linear Metre**Dimensions:** 7.5 x 19mm (Max)**950164****Safety Edge Resistor Plug****Unit:** Piece (1)**Type:** 8k2**Max. Voltage:** 30V ACDC**Suitable for:**
Contact Strip: 950162

**950166****Safety Edge Transmitter Plug****Unit:** Piece (1)**Type:** 0.5m wire**Suitable for:**

Contact Strip: 950162

**950170****Keypad and Electronic Card****Material:** Plastic Enclosure (Card) / Metal Casing (Keypad)**Unit:** Kit (1x Card / 1x Keypad)**Suitable for:**

Control Panels: 950100, 950110

**950180****Single Push Button Station****Material:** Plastic Housing**Unit:** Piece (1)**Rating:** IP55**Suitable for:**

Control Panels: 950100, 950110

**950185****Replacement Push Button****Unit:** Piece (1)**Suitable for:**

Push Button Station: 950180



**950190****12 Core Control Cable****Unit:** Linear Metre**Suitable for:**

IPR Motors and Control Panel

**950192****6 Core Power Cable****Unit:** Linear Metre**Suitable for:** Control to mains**950500****Black Lifting Belt****Material:** Black PVC**Unit:** Linear Metre**Width:** 50mm**950600****Belt Sleeve - Short****Material:** Black PVC**Unit:** Piece (1)**Suitable for:**

Run / Belt Doors (IPR)

**950605****Belt Sleeve - Long****Material:** Black PVC**Unit:** Piece (1)**Suitable for:**

Run / Belt Doors (IPR)

**951000****Galvanised Bottom Profile****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 6100mm**Size:** 50mm x 30mm**Suitable for:**

All IPR doors

**951005****Galvanised Pipe 25mm****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 6100mm**External Diameter:** 25mm**Suitable for:**

High Speed Door Curtains (IPR)

**951010****Galvanised Pipe 30mm****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 6100mm**External Diameter:** 30mm**Suitable for:**

High Speed Door Curtains (IPR)



**951015****Galvanised Pipe 40mm****Material:** Galvanised Steel**Unit:** Piece (1)**Length:** 6100mm**External Diameter:** 40mm

Suitable for:
High Speed Door Curtains (IPR)

**951020****External Mounting Posts****Material:** Aluminium / PVC**Unit:** Set (2)

Suitable for:
Keypad: 950170
Photocells: 951025

**951025****Infrared Photocell****Unit:** Piece (1)**Power Supply:** 12 / 24 AC/DC**Protection Rating:** IP55

Suitable for:
Photocell Mounting Posts: 951020

Dock Leveller Parts & Ramps

Pages **221 - 227**

Dock Leveller Parts & Ramps | Pages 221 - 227



Frame Design:

040000 Suspended

040010 Pit Mounted

Swing Lip Dock Leveller

Size: 2000mm x 2500mm

Cable Length: 8000mm (standard)

Lip Design: Hinge lip at 400mm - One piece lip complete with a 5 degree curvature for when loading above dock

Load Capacity: 6000 Kg single axle load lifting capacity

RAL Colour: Factory treated, primed and painted with two top coats of RAL 3000 hard enamel

Operating Parameters: 300mm (above / below dock)



Load capacity is strictly in accordance with the British standard for dock levellers BS EN 1398

Other sizes and designs are available on request POA

Spare parts are available

View a Dock Leveller today by booking a visit to our showroom.
Call or email our team:



0161 432 6655



sales@indupart.co.uk



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**040100****Dock Leveller Control Box - Swing Lip****Unit:** Piece (1)**Power:** 24V (through transformer)**Rating:** IP56**Suitable for:**

Pump Unit: 040110

Electric Cable: 040120

**040110****Dock Leveller Pump Unit - Swing Lip****Unit:** Piece (1)**Power:** 0.75Kw**Nominal Tension:** 230 - 400V, 50 Hz with tolerance on tension and frequency data + 5%**Absorption:** 3.6A to 230V; 2.1A to 400V**Pump:** Gear type, with fixed capacity 4.5 lt./min**Filter:** Made of metallic nets, filtering capacity: 90 microns**Oil:** Agip ARNICA 22 - Quantity: 4.5 Litres**Oil plug:** The power pack oil plug features an internal air filter, it has a diameter of ½ inch

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



Lengths:

040120 7.5 Metres

040125 12 Metres



04012-

Electric Cable for Dock Leveller - Swing Lip

Unit: Piece (1)

040130

Hydraulic Hose Set

Unit: Set (1x Large / 1x Small)



Suitable for:

Control Box: 040100

Pump Unit: 040110



Suitable for:

Pump Unit: 040110, 040183



040140

Lip Cylinder for Dock Leveller

Unit: Piece (1)

Length: 230mm (Between centre holes)

040150

Lift Cylinder for Dock Leveller

Unit: Piece (1)

Length: 460mm (Between centre holes)



Suitable for:

Dock Levellers: 040000, 040010



Suitable for:

Dock Levellers: 040000, 040010



040160

Toe Guards for Dock Leveller**Material:** Galvanised Steel**Unit:** Pair (2)**Suitable for:**

Dock Levellers: 040000, 040010



040181

Dock Leveller Control - Telescopic**Unit:** Piece (1)**Power:** 400 / 240V

040182

Electric Cable for Dock Leveller - Telescopic**Unit:** Piece (1)**Length:** 7.5 metres**Suitable for:**

Electric Cable: 040182

Pump Unit: 040183

**Suitable for:**

Control: 040181

Pump Unit: 040183



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**040183****Dock Leveller Pump Unit - Telescopic****Unit:** Piece (1)**Power:** 0.75Kw

Nominal Tension: 230 - 400V, 50 Hz with tolerance on tension and frequency data + 5%

Absorption: 3.6A to 230V; 2.1A to 400V

Suitable for: 040182, 040181



Pump: Type CV10110308 (cubic capacity 1,6 cc)

Filter: Made of Nylon, filtering capacity: 90 Microns

Oil: Agip ARNICA 22 - Quantity: 4.5 Litres


Oil plug: The power pack oil plug features an internal air filter, it has a diameter of ½ inch

**040184****Solenoid & Coil Set****Unit:** Set (3)**Power:** 24V


Suitable for:
Dock Levellers: 040000, 040010

040185**Adapters for Dock Levellers****Unit:** Set (3)

Suitable for:
Dock Levellers: 040000, 040010
Connecting hydraulic hoses to dock levellers


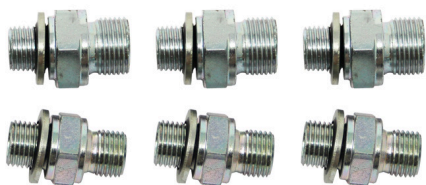
**040186****Adapters for Dock Levellers****Unit:** Set (6)**Suitable for:**

Dock Levellers: 040000, 040010
Connecting hydraulic hoses to dock levellers

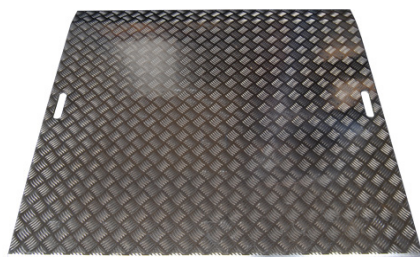**040200****AWB Bridge Plate****Material:** Reinforced Aluminium**Unit:** Piece (1)**Dimensions:** 1250mm wide x 1200mm long**Capacity:** 600kg**Cable Lengths:****902300** 5 Metres**902310** 7 Metres**9023--****TS971 - Dock Leveller Panel****Unit:** Kit (1)**Power:** 3-Phase**Motor Max. Door Weight:** 200kg (60NM)**Suitable for:**

Dock Levellers: 040000, 040010
Comes With: Ranger 61

**040210****HFB60 Bridge Plate****Material:** Reinforced Aluminium**Unit:** Piece (1)**Dimensions:** 600 mm wide x 1500mm long**Capacity:** 1200kg

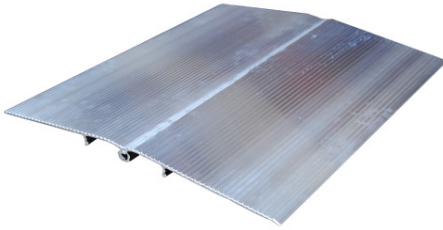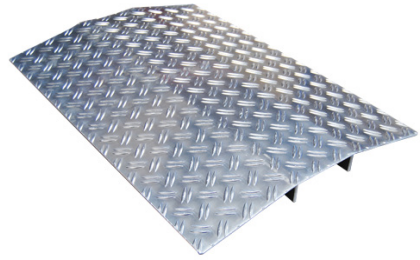**040220****SBA Threshold Ramp****Material:** Reinforced Aluminium**Unit:** Piece (1)**Dimensions:** 700 mm wide x 600mm long**Capacity:** 500kg**040230****SBS Cable Bridge****Material:** Reinforced Aluminium**Unit:** Piece (1)**Dimensions:** 700 mm wide x 500mm long**Capacity:** 300kg

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

Dock Shelters

Pages **229 - 232**

Dock Shelters | Pages 229 - 232

Foam Dockseals



IS101

Timber Base: The pads are mounted on a timber base of 150 x 50 PSE Redwood treated with black preservative paint. Once installed the bases will not require any form of maintenance

Foam: The pads are filled with RX 24 Grade expanded foam with residual memory

Side Pad Covers: The covers are made from PE 900g / 2000 Gloss black PVC c/w wear pleats and yellow traffic marks. The covers are secured with Galvanised coach screws

Head Pad Covers: The covers are made from the same PE 900g / 200 Gloss Black material with double thickness on the front of the pad where contact occurs



The exterior of all the pads can be cleaned with a mild detergent solution in warm water

Rigid Dock Shelter



IS200

Framework: The Rigid Frame is constructed from 50 x 50 steel box section powder coated to prevent corrosion. The frame is then covered in heavy duty PVC coated on both sides. The roof will be peaked to the side frames to allow drainage. Finished on the face with anodised aluminium angle to secure the curtains. The frame are supported by sturdy shelter brackets secured to the wall and finished in safety yellow powder coating.

Curtains: Poly- Vinyl Chloride (PVC) 3mm heavy duty material is used in the designed not only for its resistance to the elements but also its durability against abrasion. The robust material is bolstered by a double layer of polyester woven matting enabling it to resist piercing and tears and provides excellent support and resistance.

Curtain Design: Side Curtains have 1000mm x 100mm yellow guide stripe. Head curtain have rounded corners. All curtains have additional shock cord straps to minimise wind deflection in non loading periods.

Retractable Dock Shelter



IS300

Framework: Manufactured with a 60mm x 30mm galvanised steel box section. Cantilevered arms bolted to the back and front side beams. These are pivoted at each end to allow the shelter to retract against the building in the case of vehicle contact.

Options: The dock shelters are available in various heights, widths and projections to facilitate your individual requirements. Also available are curtain dimensions and designs to achieve the maximum sealing solution for your vehicle fleet.



General Specifications: The dock shelters are available in various heights, widths and projections to facilitate your individual requirements. Also available are curtain dimensions and designs to achieve the maximum sealing solution for your vehicle fleet.

Requirements: All that will be required will be a suitable flat fixing area. This area should be flush with building line and have a flat surface.

Inflatable Dock Shelter



IS400

Inflatable dock shelters provide you with the most versatile sealing system available, being able to facilitate various sized vehicles whilst offering the ultimate sealing between the vital gap of the vehicle and building. This model is recommended for cold stores and where vehicles with tail lifts are prominently used. Models are available for either dock mounted or down to ground and can be custom manufactured to suit most environments, ie: large or low doorways.

Standard Size: Standard sizes are 3.6m wide x 3.7m high with 900mm projection
Floor mounted (no support brackets required) 4900mm high.



General Specifications: Airbags manufactured from a hard wearing, waterproof and anti-tear material to give a longer lasting life. Airbags have an internal retraction system giving a deflate time of approximately 15 seconds. The main structure comprises of 50mm insulated panel, this reduces the condensation factor around the loading bay area. Although the standard is generally white they can be colour matched to suit your requirements. Storage curtains are 3.5mm thick c/w guide markers. The system is powered by a small 415v 3 Phase fan that continuously runs whilst in operation. Power supply requirements are 6 amp.





Did you know?

Indupart Training offers a variety of courses including:

Dock Leveller Service & Repair



Find out more at
www.induparttraining.co.uk

☎ 0161 432 6655

✉ sales@indupart.co.uk

🌐 www.indupart.co.uk

Loading Bay Components, Wheel Guides & Bollard

Pages **235 - 239**

Loading Bay Components | Pages 235 - 237

Wheel Guides | Page 238

Bollards | Page 239

**050020****450mm Yellow Dock Bumper****Material:** Polythene / Rubber**Unit:** Piece (1)**Dimensions:** 260mm x 450mm x 110mm

Easy slide in replacement with no fixing holes - makes for a faster repair

**050030****750mm Yellow Dock Bumper****Material:** Polythene / Rubber**Unit:** Piece (1)**Dimensions:** 260mm x 750mm x 110mm

Easy slide in replacement with no fixing holes - makes for a faster repair

**050040****Thick Dock Bumper****Material:** Rubber**Unit:** Piece (1)**Dimensions:** 450mm x 250mm x 150mm

Does not include fixings

**050050****Standard Dock Bumper****Material:** Rubber**Unit:** Piece (1)**Dimensions:** 450mm x 250mm x 100mm

Does not include fixings




0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

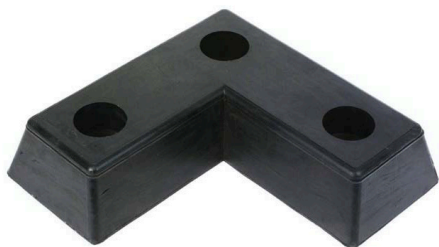**050060****'L' Shape Dock Bumper****Material:** Rubber**Unit:** Piece (1)**Dimensions:** 450mm x 450mm x 100mm

Does not include fixings

**050070****Long Dock Bumper****Material:** Rubber**Unit:** Piece (1)**Dimensions:** 450mm x 750mm x 100mm

Does not include fixings

**050074****Standard Dock Bumper Bracket****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Dock Bumper: 050050

**903000****Halogen Dock Light****Material:** PPC Steel**Unit:** Piece (1)**Power:** 240V through 12V Transformer


**903010****LED Dock Light****Material:** PPC Steel**Unit:** Piece (1)**Power:** 240V through 12V Transformer**Operating Temp:** -20 to +60°C**Output:** 800 Lumen**LED Life:** 50,000 Hours



Finishes:

120000 Yellow Painted**120005** Galvanised**12000-****Curved Wheel Guide - Bolt Down****Material:** Steel**Unit:** Pair (2)Does not include fixings
Order by request only

Finishes:

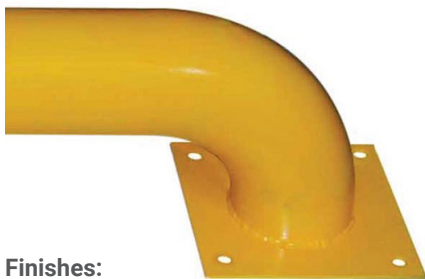120010 Yellow Painted**120015** Galvanised**12001-****Curved Wheel Guide - Cast In****Material:** Steel**Unit:** Pair (2)**Order by request only**

Finishes:

120020 Yellow Powder Coated**120025** Galvanised**12002-****Straight Wheel Guide - Bolt Down****Material:** Steel**Unit:** Pair (2)Does not include fixings
Order by request only

Finishes:

120030 Yellow Powder Coated**120035** Galvanised**12003-****Straight Wheel Guide - Cast In****Material:** Steel**Unit:** Pair (2)**Order by request only**

Finishes:

121000 Yellow Powder Coated**121005** Galvanised**12100-****168mm Bollard - Ground Fix****Material:** Steel**Unit:** Pair (2)**Overall Height:** 1200mm**Diameter:** 168mmDoes not include fixings
Order by request only

Finishes:

121010 Yellow Powder Coated**121015** Galvanised**12101-****127mm Bollard - Ground Fix****Material:** Steel**Unit:** Pair (2)**Overall Height:** 1200mm**Diameter:** 127 mmDoes not include fixings
Order by request only

Finishes:

121020 Yellow Powder Coated**121025** Galvanised**12102-****168mm Bollard - Cast In****Material:** Steel**Unit:** Pair (2)**Height Above Ground:** 1200mm**Height Incl. Below Ground:** 1600mm**Diameter:** 168mm400mm extra for below ground install
Order by request only

Finishes:

121030 Yellow Powder Coated**121035** Galvanised**12103-****127mm Bollard - Cast In****Material:** Steel**Unit:** Pair (2)**Height Above Ground:** 1200mm**Height Incl. Below Ground:** 1600mm**Diameter:** 127mm400mm extra for below ground install
Order by request only

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

Motors & Manual Operation

Pages **241 - 250**

Motors & Manual Operation | Pages 241 - 250



5 Pin



902001	(a) See Below
902002	(b) See Below
902003	(c) See Below
902011	(d) See Below



9020--

Ranger Motor Kits**Unit:** Kit (1)**Rating:** IP65**Power:** 3-Phase

Max. Door Weight: 60Nm - 200Kg /
90Nm - 400Kg
Kit requires cable set and motor
bracket



(a): GfA Ranger 91 kit complete with
GfA TS 959 control panel

(b): GfA Ranger 91 kit complete with
GfA TS 970 control panel

(c): GfA Ranger 91 kit complete with
GfA TS 971 control panel

(d): GfA Ranger 61 kit complete with
GfA TS 959 control panel



3 Pin



902080

GfA Ranger 51W Motor Kit**Unit:** Kit (1)**Chain and Cable Length:** 7 Metres**Power:** 1-Phase

Max. Door Weight: 200kg
GfA Ranger 51 kit complete with GfA
TS 959 control panel



3 Pin



902081

GfA Ranger 91W Motor Kit**Unit:** Kit (1)**Chain and Cable Length:** 7 Metres**Power:** 1-Phase

Max. Door Weight: 400kg
GfA Ranger 91 kit complete with GfA
TS 959 control panel



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



5 Pin

**902085****GfA Ranger 90RK1 Motor Kit****Unit:** Kit (1)**Chain Length:** 7 Metres**Cable Length:** 5 Metres**Power:** 3-Phase

GfA Ranger 90 kit complete with GfA TS 959 control panel



5 Pin

**902090****GfA Ranger 150RK1 Motor Kit****Unit:** Kit (1)**Chain Length:** 7 Metres**Cable Length:** 5 Metres**Power:** 3-Phase

GfA Ranger 150 kit complete with GfA TS 959 control panel



3 Pin

**902095****GfA Ranger 90W Motor Kit****Unit:** Kit (1)**Chain Length:** 7 Metres**Cable Length:** 5 Metres**Power:** 1-Phase

GfA Ranger 90 kit complete with GfA TS 959 control panel



5 Pin

**Available Controls:****902110** (a) See Below**902130** (b) See Below**9021--****3-Phase Control Panel****Material:** Plastic Enclosure**Unit:** Piece (1)**Rating:** IP65**Power:** 3-Phase(a): GfA TS 959 control panel
(b): GfA TS 970 control panel

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



3 Pin

**902140****1-Phase Control Panel - TS 959****Material:** Plastic Enclosure**Unit:** Piece (1)**Rating:** IP65**Power:** 1-Phase

GfA TS 959 control panel



5 Pin

**902160****3-Phase Control Panel - TS 971****Material:** Plastic Enclosure**Unit:** Piece (1)**Rating:** IP65**Power:** 3-Phase

GfA TS 971 control panel



3 Pin

**902165****TS971 - Single Phase Control Box****Unit:** Piece (1)**Rating:** IP65**Power:** Single Phase

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



5 Pin

902920**FORCE100 XC Motor Kit****Unit:** Kit (1)**Torque:** 100Nm**Supply Voltage:** 3x230/400**Chain Length:** 5000mm**Shaft Diameter:** 25.4mm**Control Panel:** New IQ Panel**Rating:** IP54**Features (Supplied):**

- 'Plug and play' for easy installation
- 3 relays
- 24DC output for accessories
- Safety edge: Optical (OSE) / Pneumatic (PSE)

**Suitable for (Not Supplied):**

- Traffic lights (Relays)
- Photocells
- Loop detector
- External push button
- Motion detector (Relays)
- Light curtains
- Radio control
- Dock leveller intergration (Relays)

**307030****M10 x 30mm Ring Bolt****Material:** Galvanised Steel**Unit:** Piece (1)**509105****Motor Mounting Plate****Material:** Galvanised Steel**Unit:** Piece (1)

Suitable for:
Nut: 307001

**Suitable for:**

Motors: 902001, 902002, 902003,
902011



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**801000****Geared Chain Hoist****Material:** Galvanised Steel**Unit:** Piece (1)**Hand Chain:** 8 Metres**Drive Chain:** 1250mm Long**Ratio:** 1:4**Max. Door Weight:** 825kg**801001****Drive Chain For Chain Hoist****Material:** Steel**Unit:** Linear Metre**Suitable for:**

Chain Hoist: 801000

**801002****Split Link For Drive Chain****Material:** Steel**Unit:** Piece (1)**Suitable for:**

Hand Chain: 801001


**801005****Compact Geared Chain Hoist****Material:** Galvanised Steel**Unit:** Piece (1)**Hand Chain:** 8 Metres**Ratio:** 1:4**Max. Door Weight:** 700kg

**801010****Chain Hoist Tensioner****Material:** Galvanised Steel / Plastic Housing**Unit:** Piece (1)**Suitable for:**

Hand Chain: 801020

**801020****Replacement Hand Chain For Hoists****Material:** Sheradised Steel**Unit:** Linear Metre**Suitable for:**

Chain Hoists: 801000, 801005

**801030****Padlockable Chain Cleat****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Hand Chain: 801020, 907113

**801031****Standard Chain Cleat****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Hand Chain: 801020, 907113



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**802000****Orange Hoisting Rope****Material:** Polypropylene**Unit:** Linear Metres**Diameter:** 10mm**Suitable for:**

Shackle: 612000

Rope Clip: 802010

**802010****Single Hole Rope Clip****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Hoist Rope: 802000

**900100****FCP03 Interface Panel****Material:** Plastic Enclosure**Unit:** Piece (1)

Main interface unit for fire shutters

**900102****FCP03 Repeater Panel****Material:** Plastic Enclosure**Unit:** Piece (1)**Suitable for:**

FCP03 Panel: 900100





Lengths:

902300 5 Metres

902310 7 Metres

**9023--****TS971 - Dock Leveller Panel****Unit:** Kit (1)**Power:** 3-Phase**Motor Max. Door Weight:** 200kg (60NM)**Suitable for:**

Dock Levellers: 040000, 040010

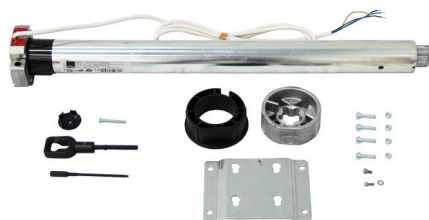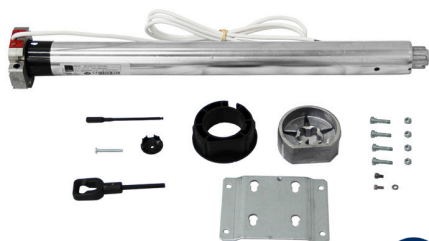Comes With: Ranger 61**902410****120NM Tube Motor Kit****Unit:** Piece (1)**Suitable for:** Roller Shutters**902420****60NM Tube Motor Kit 4"****Unit:** Piece (1)**Suitable for:** Roller Shutters**902430****100NM Tube Motor Kit 4"****Unit:** Piece (1)**Suitable for:** Roller Shutters


0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

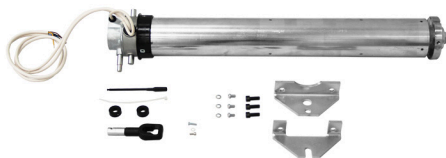**902440****200NM Tube Motor Kit 4"**

Unit: Piece (1)

**Suitable for:** Roller Shutters**902450****50NM GAROG Tube Motor Kit**

Unit: Piece (1)

**Suitable for:** 4" 16SWG, Roller Shutters**902460****100NM GAROG Tube Motor Kit**

Unit: Piece (1)

**Suitable for:** 4" 16SWG, Roller Shutters**902470****230NM GAROG Tube Motor Kit**

Unit: Piece (1)

**Suitable for:** 4" 9SWG, Roller Shutters

**Available Lengths:**


902505	5 Metres
902507	7 Metres
902509	9 Metres
902513	13 Metres

**9025--****Control Panel Cable****Material:** Electric Cable**Unit:** Piece (1)**Suitable for:**

Motors: 902001, 902002, 902003, 902011

**902600****Split Link For Hand Chain****Material:** Steel**Unit:** Piece (1)**Suitable for:**

Hand Chain: 907113

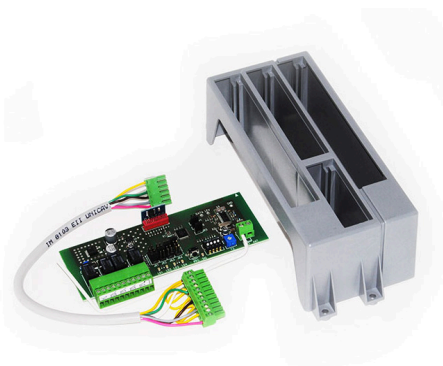**902800****RX4 Radio Receiver****Material:** Plastic Enclosure / Electronics**Unit:** Piece (1)**Suitable for:**

Motor Kit: 902920

**907113****Hand Chain****Material:** Steel**Unit:** Linear Metre**Suitable for:**

Motors: 901001, 902002, 902003, 902011



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



Did you know?

Indupart offers a variety of industrial doors including
Panoramic Overhead Doors



Available with a
built-in wicket door



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk


Electrical Components & Accessories

Pages **253 - 276**

Electrical Components & Accessories | Pages 253 - 276

**090100****Lockable Protection Box For Key Switch****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Key Switch: 908045

**090600****147NM Safety Brake 18mm with Switch****Unit:** Piece (1)**Suitable for:** Roller Shutters**090610****Safety Brake Shaft Assembly - 98mm****Unit:** Piece (1)**Suitable for:** 090600, Roller Shutters**090620****Safety Brake Shaft Assembly - 93mm****Unit:** Piece (1)**Suitable for:** 090600, Roller Shutters

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**090630****Safety Brake Shaft 30/35mm****Unit:** Piece (1)**Diameter:** 30mm / 35mm**Suitable for:**

Safety Brake: 090650

**204017****Safe Edge Mount Rail 3M****Unit:** Piece (1)**Length:** 3 Metres**Suitable for:** Roller Shutters

Safe Edges: 208024, 208026

**208024****Safe Edge Profile 11mm Bore****Unit:** Linear Metre**Bore:** 11mm**Suitable for:** Sectional Doors**208026****Safe Edge Profile 11mm Bore****Unit:** Linear Metre**Bore:** 11mm**Suitable for:** Roller Shutters

**208040****Black Rubber Bungs****Material:** Rubber**Unit:** Pair (2)**Suitable for:**

Bottom Seal: 208011

**208044****Safety Edge Bumper****Unit:** Piece (1)**Suitable for:**

Safe Edge: 208026

**208045****Red Plastic Bungs****Material:** Plastic**Unit:** Pair (2)**Diameter:** 14mm**Suitable for:**

Bottom Seal: 208020

**208050****Large Rubber Bungs****Material:** EPDM**Unit:** Pair (2)**Suitable for:**

Bottom Seal: 208000



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**208052****Safety Edge Bumper****Material:** Plastic**Unit:** Piece (1)**Dimensions:** 39mm x 21mm x 53mm long**Suitable for:**

Bottom Seal: 208013

**208055****Optical Rubber Bungs****Material:** EPDM**Unit:** Pair (2)**Suitable for:**Bottom Seal: 208013, 208015, 208016
Sender & Receiver: 908075**208060****Pneumatic Insertion Elbow****Material:** Aluminium**Unit:** Piece (1)**Suitable for:**Bungs: 208065, 208040
Air Switch: 908090**208065****Black Rubber Bungs****Material:** Rubber**Unit:** Pair (2)**Suitable for:**

Bottom Seal: 208013, 208015, 208016



**210050****Stand Off Bracket****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Spiral Cable: 908082, 908083

**303057****Safety Bottom Bracket Interlock Switch****Material:** Galvanised Steel / 2 Core Cable**Unit:** Pair (2)**Suitable for:**

Bottom Bracket: 303060, 303045, 303050, 303054

**509105****Motor Mounting Plate****Material:** Galvanised Steel**Unit:** Piece (1)**Suitable for:**

Motors: 902001, 902002, 902003, 902011

**835010****Falcon Radar Motion Detector****Unit:** Piece (1)**Rating:** IP65**Power:** 12 - 24V (AC or DC)**Detection Zone:** 4m x 5m (at 5m mount height)**Mounting Height:** 3.5m to 7m
Required: 835015

**835015****Remote for Falcon Radar****Material:** Plastic Housing**Unit:** Piece (1)**839000****Photocell Send / Reflect****Unit:** Piece (1)**Multi Voltage:**

AC: 24 - 240v

DC: 12 - 240v

**Suitable for:**

Motion Detector: 835010

**Range:** 9 Metres Maximum**839010****Photocell Sender / Receiver****Unit:** Piece (1)**Multi Voltage:**

AC: 24 - 240v

DC: 12 - 240v

**902155****Cover Plate****Unit:** Piece (1)**Range:** 30 Metres**Suitable for:** 902160 (TS971 Control Panel)



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

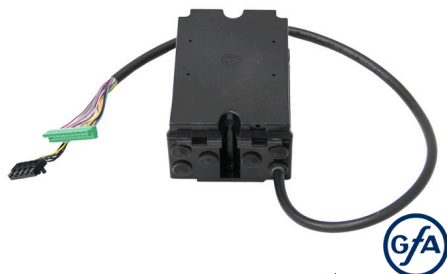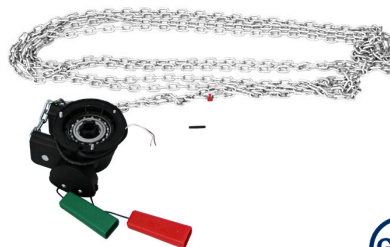**902170****Built on Starter for GfA Motors****Unit:** Piece (1)**Power:** 400v / 3-Phase**Suitable for:** GfA motors with mechanical limits only**902175****GAROG 3 Phase Wall Starter****Unit:** Piece (1)**Power:** 1.0A-1.6A**Suitable for:** Sectional Doors, Roller Shutters with mechanical limits**902180****GAROG 3 Phase Wall Starter****Unit:** Piece (1)**Power:** 1.6A-2.5A**Suitable for:** Sectional Doors, Roller Shutters with mechanical limits**902200****Hand Chain O/Ride****Unit:** Piece (1)**Suitable for:** Sectional Doors, Roller Shutters (Ranger Motors)

**902210****Flange Mount Set****Unit:** Piece (1)**Shaft:** 25.4mm (1")**Suitable for:**

Motor Kits: 902085, 902090


**902445****Adaptor Kit****Unit:** Piece (1)**Size:** 93.4mm (4")**Suitable for:**

Tube Motors

**902446****Adaptor Kit****Unit:** Piece (1)**Size:** 93mm-120mm**Suitable for:**

Tube Motors

**902480****KNH 25 Operator****Unit:** Piece (1)**Type:** Safedrive 17 / 15 - 45 / 15**Suitable for:** Roller Shutters

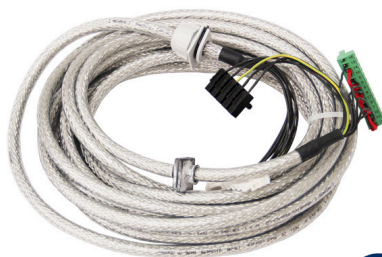**902485****KNH 60 Operator****Unit:** Piece (1)**Type:** Safedrive 55 / 15 - 180 / 06**Suitable for:** Roller Shutters**902515****7M Mechanical Limit Cable Set****Unit:** Piece (1)**Length:** 7 Metres**Suitable for:**

Ranger motors with mechanical limits (NES)

**Lengths:****902505** 5m Long**902507** 7m Long**902509** 9m Long**902513** 13m Long**9025--****Control Panel Cable****Unit:** Piece (1)**Suitable for:**

Motors: 902001, 902002, 902003, 902011

GfA drives with digital limits



Cord Lengths:

902550 10 Metres

902555 4 Metres



90255-

Red/Green Toggle Set For Motors

Material: Nylon / PVC

Unit: Kit (1)



Suitable for:

Motor Kits: 902001, 902002, 902003, 902011



902560

2 Channel Key Fob

Unit: Piece (1)

Frequency: 433Mhz



Suitable for:

Control Panel: 902160



902570

GAROG Rollacom Receiver with 2 Transmitters

Unit: Piece (1)



Suitable for:

Transmitter: 902575



902575

GAROG Rollacom Transmitter

Unit: Piece (1)



Suitable for:

Receiver & Transmitter: 902570



**902700****Radio Remote Service Pack****Unit:** Kit (2 Receivers / 5 Fobs)**Application:** Universal**Input:** AC/DC 12V - 30V**902930****LC2 Light Curtain****Unit:** Kit (1x Receiver / 1x Transmitter)**Cable Length:** 5m (Transmitter) / 15m (Receiver)**Bar Length:** 2800mm**Max. Door Width:** 10 Metres**Min. Door Width:** 1.6 Metres**Active Height:** 2555mm**Power:** 10 - 30V DC**902940****GfA Light Curtain****Unit:** Kit (1x Receiver / 1x Transmitter)**Bar Length:** 1928mm**Active Length:** 1800mm**Rating:** IP67**Power:** 12 - 30V DC**902950****GfA Light Curtain****Unit:** Kit (1x Receiver / 1x Transmitter)**Bar Length:** 2648mm**Active Length:** 2590mm**Rating:** IP67**Power:** 12 - 30V DC

Min. Door Width: 1 Metre
Max. Door Width: 8 Metres
 Comes with a 10 metre sync cable:
 902970



Min. Door Width: 1 Metre
Max. Door Width: 8 Metres
 Comes with a 10 metre sync cable:
 902970

**902960****Safety Contactor****Material:** Plastic Enclosure**Unit:** Piece (1)

Suitable for: 902940, 902950
For when 2x light curtains are being used

**902970****10M Sync Cable****Unit:** Piece (1)**Length:** 10 Metres

Suitable for:
Light Curtains: 902940, 902950

**903000****Halogen Dock Light****Material:** PPC Steel**Unit:** Piece (1)

Power: 240V through 12V Transformer

**903010****LED Dock Light****Material:** PPC Steel**Unit:** Piece (1)**Output:** 800 Lumen

Power: 240V through 12V Transformer
LED Life: 50,000 Hours
Operating Temp: -20 to +60°C



**904010****24 LED Traffic Light****Unit:** Piece (1)**Rating:** IP68**Dimensions:** 140mm wide x 270mm high x 50mm thick**Power:** 24V DC**904015****Regulated Transformer****Unit:** Piece (1)**Power:** 36W, 24V DC Switch Mode PSU**Suitable for:**
Traffic Lights: 904010, 904020, 904030**904020****40 LED Traffic Light****Unit:** Piece (1)**Rating:** IP68**Dimensions:** 140mm wide x 270mm high x 50mm thick**Power:** 24V DC**904030****Large 40 LED Traffic Light****Unit:** Piece (1)**Rating:** IP68**Dimensions:** 190mm wide x 365mm high x 50mm thick**Power:** 24V DC


0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk




Units:

905000 Single Channel**905200** Double Channel**905---****11 Pin Loop Detector****Unit:** Piece (1)**Power:** 240V AC**Suitable for:**


Base Unit: 905020



Units:

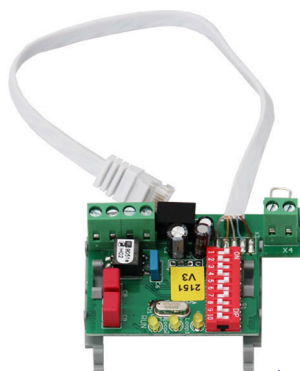905010 Single Channel**905210** Double Channel**905---****11 Pin Loop Detectors & Base Unit****Unit:** Piece (1)**Power:** 24V AC**905015****2 Channel Loop Detector Card****Unit:** Piece (1)**Suitable for:**

Control Panels: TS970, TS971

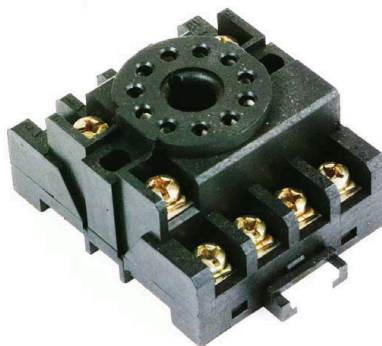**905020****11 Pin Base Unit****Unit:** Piece (1)**Suitable for:**

Loop Detectors: 905000, 905200



0161 432 6655




sales@indupart.co.uk



www.indupart.co.uk

**905030****Plastic Enclosure For Loop Detectors****Material:** Plastic**Unit:** Piece (1)**Rating:** IP67**Suitable for:**

Loop Detectors: 905000, 905200

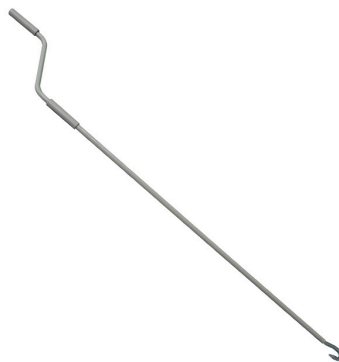**905740****Crank Handle****Unit:** Piece (1)**Length:** 1.4 Metres**Suitable for:** Roller Shutter Motors**907279****94mm Red Palm Switch****Material:** Plastic**Unit:** Piece (1)**Rating:** IP69K**Power:** Maximum 500V AC 2 amp,
220V DC 3 amp**907280****Mountable Stop Button****Unit:** Piece (1)**Rating:** IP66**Reset:** Turn to release**Actuation:** Latching**Mounting Type:** Control Panel

**907281****Mushroom Head Stop Button****Material:** Plastic**Unit:** Piece (1)**Max. Current:** 0.55 (dc) A, 6 (ac) A**Reset:** Key Release**Mounting Type:** Control Panel**907282****Lockable Key Switch Activator****Unit:** Piece (1)**Rating:** IP66**Mounting Type:** Control Panel**907283****2 Position Key Switch Kit****Unit:** Piece (1)**908000****Push Button Station****Material:** Plastic Housing**Unit:** Piece (1)**Rating:** IP65**Suitable for:**

Control Panel: 9021--

**Power:** 240V AC, 5 amp

**908010****Lockable Push Button Station****Material:** Plastic Housing**Unit:** Piece (1)**Rating:** IP65**Power:** 240V AC, 5 amp**908020****3 Way Push Button****Unit:** Piece (1)**Activation:** 1x Latching / 1x Key Switch**Suitable for:** Sectional Doors, Roller Shutters**908030****External Card Reader / Keypad****Material:** Plastic / Stainless Steel**Unit:** Piece (1)**Rating:** IP65**Dimensions:** 86mm x 86mm x 23mm**Input:** 24V D/C Only**Suitable for:**
Key Card: 908035**908035****Magnetic Entry Cards For Keypad****Material:** Plastic**Unit:** Piece (1)**Suitable for:**
Keypad: 908030

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**908045****Key Switch Surface Mount****Material:** Steel / Aluminium**Unit:** Piece (1)**Rating:** IP54**Max. Power:** 240V AC, 5 amp**908046****Pull Switch****Material:** Aluminium Housing**Unit:** Piece (1)**Rating:** IP65**Max. Power:** 24V - 9.5W / 48V - 6.8W**908048****Wireless Pull Switch & Receiver****Material:** Plastic**Unit:** Piece (1)**Rating:** IP65**Range:** 100 Metres**Operating Temp.:** 25°C - +70°C
Power: 2.4GHz, 24 - 240V (Receiver)**908050****Magnetic Interlock Switch****Material:** Aluminium (Magnets) / ABS Plastic (Junction Box)**Unit:** Piece (1)**Cable:** 2 core 0.14mm² PVC covered - 3000mm long**Power:** 24V
Operating Temp.: -25°C - +85°C

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**908051****4M Optical Safety Kit****Unit:** Kit (1)**Length:** 4 Metres**Suitable for:** Roller Shutters**908052****6M Optical Safety Kit****Unit:** Kit (1)**Length:** 6 Metres**Suitable for:** Roller Shutters**908053****8M Optical Safety Kit****Unit:** Kit (1)**Length:** 8 Metres**Suitable for:** Roller Shutters**908054****4M Optical Safety Kit****Unit:** Kit (1)**Length:** 4 Metres**Suitable for:** Sectional Doors

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**908055****6M Optical Safety Kit****Unit:** Kit (1)**Length:** 6 Metres**Suitable for:** Sectional Doors**908056****3.6V Battery 2600mAh - AA****Unit:** Piece (1)**Power:** 3.6V**Suitable for:** 908092**908057****3.6V Battery 9000mAh - C****Unit:** Piece (1)**Power:** 3.6V**Suitable for:**
Safety Edge: 908094**908063****Safety Limit Switch - Arm Type****Material:** Thick PVC Housing**Unit:** Piece (1)**Rating:** IP67**Max. Power:** 240V AC - 3 amp
Operating Temp.: -30°C to +70°C with no icing

0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**908065****Safety Limit Switch - Ball Type****Material:** Thick PVC Housing**Unit:** Piece (1)**Rating:** IP67


Max. Power: 240V AC - 3 amp
Operating Temp.: -30°C to +70°C with no icing

**908068****PVC Enclosure****Material:** Plastic ABS**Unit:** Piece (1)**Rating:** IP54**Dimensions:** 55mm x 55mm x 42mm**Suitable for:** Connection Cables**908070****Reflective Photocell Disc****Material:** Reflective ABS**Unit:** Piece (1)**Diameter:** 85mm

Suitable for:
 Photocell Kit: 839000

**908075****Optical Sender And Receiver****Material:** Plastic PA6 (Transmitter), Lexan IR transparent (Receiver)**Unit:** Piece (1)**Rating:** IP67**Type Of Light:** 880nm Pulsed

Max. Range: 12 Metres
Operating Temperature: -25°C - +75°C

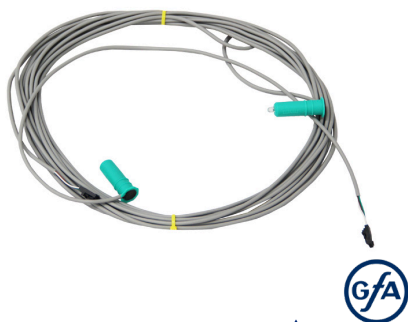**908076****FRABA Universal Optical Send/Rec****Unit:** Piece (1)**Bore:** 11mm**Suitable for:**

Control Panels: TS970, TS971

**908078****FRABA Optical Safety Edge Kit****Material:** Plastic ABS Housing**Unit:** Piece (1)**Rating:** IP67**Suitable for:**

Control Panels: 902130, 902160

Operation Temp.: -25°C - +75°C**Supply Voltage:** 12V DC**Sizes:****908082** 1.2m to 3.5m**908083** 3m to 6m**90808-****5 Core Spiral Cable****Material:** Electric Cable**Unit:** Piece (1)**Suitable for:**

Enclosure: 908068

908086**Clear Air Tube****Material:** Clear PVC**Unit:** Linear Metre**Suitable for:**

Air Switch: 908090



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

**908090****Pneumatic Air Switch****Material:** Plastic Housing**Unit:** Piece (1)**Rating:** IP54**Power:** 24 - 250V AC, 24 - 50V DC

Max. Pressure: 150 mbar
Ambient Temp.: -30°C - +70°C

**908092****Wireless Safety Edge Kit****Material:** Plastic Housing**Unit:** Kit (1)**Rating:** IP55**Frequency:** 868.95 or 869.85 Mhz


Suitable for:
 Optical Sensors: 908075
Working Temp.: -35°C - +55°C

**908094****Wireless Safety Edge Kit****Material:** Plastic ABS Housing**Unit:** Kit (1)

Suitable for:
 Control Panel: 902160

**908098****5 Pin Relay****Material:** Plastic Enclosure**Unit:** Piece (1)**Coil Voltage:** 24V DC

Max Switching Voltage: 380V AC / 125V DC
Max current AC/DC: 10 amp



5 Pin



908099

DIN Rail Socket

Material: Plastic

Unit: Piece (1)

Rated Load: 10amp / 250v



Suitable for:
Relay: 908098

908532

5 Pin Inverter Plug & Cable

Unit: Piece (1)

Rating: IP44



Power: 3-Phase, 16Amp





Did you know?

Indupart offers a variety of industrial doors including

High Speed Doors *Run, Belt & Flexirun*



Now available with
GfA operators

General Fixings

Pages **279 - 284**

General Fixings | Pages 279 - 284

**Sizes:**

306021	M8 BZP
306051	M6 BZP
306055	M6 Stainless
307001	M10 BZP

**Sizes:**

306045	M6 x 20
307200	M8 x 25
307201	M10 x 35
307202	M12 x 35
307203	M8 x 40

30----**Flanged Nut****Material:** Galvanised Steel**Unit:** Bag (100)**30----****Slotted Countersunk Screws****Material:** Galvanised Steel**Unit:** Bag (100)**Sizes:**

306064	M6 x 25	307005	M10 x 40
306065	M8 x 25	307009	M10 x 16
306067	M8 x 40	307032	3/8" unc x 32
306070	M8 x 16	307280	M12 x 40
306075	M8 x 12	307285	M12 x 50
307002	M10 x 25	307288	M16 x 50

**30----****Hexagonal Head Set Screws****Material:** Galvanised Steel**Unit:** Bag (100)

**Sizes:**

306020	M6.3 x 35 BZP
306022	M6 x 25 Stainless
306025	M6.3 x 35 Stainless
306030	M6.3 x 25 BZP
306031	M6.3 x 19 BZP
306060	M8 x 23 BZP

3060--**Hexagonal Head Self Tapping Screws****Material:** Galvanised Steel**Unit:** Bag (100)**Sizes:**

306050	M6 x 16
306072	M8 x 20

3060--**BZP Rip Neck Screws****Material:** Galvanised Steel**Unit:** Bag (100)**306029****Self Drilling Screws****Material:** Galvanised Steel**Unit:** Bag (100)**Size:** M6.3 x 25**306040****Self Tapping Screws & Washers****Material:** Galvanised Steel / Nylon**Unit:** Bag (100)**Size:** M6.5 x 25



Sizes:

307042	M10 x 20
307045	M12
307230	M8
307250	M10 x 32
307294	M16

307---

Steel Washers**Material:** Galvanised Steel**Unit:** Bag (100)

Sizes:

307044	M12 x 40
307235	M8 x 30
307049	M16 x 30
307255	M10 x 30

307---

Plastic Washers**Material:** Nylon**Unit:** Bag (100)

Sizes:

307003	M8
307004	M6
307016	M12

3070--

BZP Nylock Nut**Material:** Galvanised Steel / Nylon**Unit:** Bag (100)

Sizes:

307010	M6 x 16 BZP
307011	M6 x 16 Stainless
307013	M6 x 110 Steel Black
307014	M6 x 20 BZP
307015	M6 x 25 BZP
307018	M6 x 60 BZP
307020	M8 x 25 BZP

3070--

Dome Head Carriage Screw**Material:** Galvanised Steel**Unit:** Bag (100)



Sizes:

307022 M8 x 65

307035 M12 x 130

3070--

Cap Head Screw - Allen Key

Material: Steel

Unit: Pack (10)



307030

M10 x 30mm Ring Bolt

Material: Galvanised Steel

Unit: Piece (1)

Size: M10 x 30mm



Suitable for:

Nut: 307001



Sizes:

307041 M10

307043 M12

30704-

Spring Washers

Material: Steel

Unit: Bag (100)



307091

M8 x 24 Clevis Pin c/w Split Pin

Material: Galvanised Steel

Unit: Piece (1)



Suitable for:

Bottom Brackets: 302000, 303001



**Sizes:****307289** M10**307290** M12**307293** M16**3072--****BZP Full Nuts****Material:** Galvanised Steel**Unit:** Bag (100)**307295****Pop Rivets****Material:** Aluminium**Unit:** Bag (100)**Size:** M5**Drill Range:** 1mm - 6mm**Sizes:****509055** M10 x 90**509060** M8 x 65**509065** M12 x 105**509070** M16 x 135**308095****5mm Wide Spacer****Material:** Galvanised Steel**Unit:** Pack (10)**5090--****Steel Rawl Bolts****Material:** Steel**Unit:** Piece (1)**Suitable for:**

Rollers: 308000, 308010

**509050****Box Section Bolts****Material:** Galvanised Steel**Unit:** Piece (1)**Size:** M10 X 130mm**Sizes:****600000** 3/8" unc x 25**600001** 3/8" unc x 37**60000-****Square Head Set Screw****Material:** Steel**Unit:** Pack (10)**600105****Anchor Fixings****Material:** Galvanised Steel**Unit:** Bag (100)**Size:** M16 x 130mm**615095****Lubricant Spray****Unit:** Piece (1)



Did you know?

Indupart offers a variety of industrial doors including

Insulated Rolatherm Shutters



Indupart Information

Pages **287 - 291**

Depot Addresses | Page 287

Depot Map | Page 288

How To Order | Page 289

Payment Options | Page 290

FAQs | Page 291

Payment Options



Credit/Debit Card

Indupart accepts all major debit and credit cards as payment including American Express. Simply go to our Stockport depot to collect your goods and your transaction can be processed on site. Alternatively, we now accept debit/credit card payments over the phone.



Cash

You can pay in cash at any of our depots.



Cleared Cheque

Once you have placed an order, Indupart will send you a pro-forma invoice. You can then send a cheque to our Head Office in Stockport where it will be banked immediately. Upon confirmation of clearance from the bank (this usually takes 5 working days) we will dispatch your goods.



Credit Account

Subject to online credit checks, Indupart offers a monthly trade account. Meaning all your purchases for each month don't need to be paid until the end of the following month. To apply for a trade account, simply fill in the 'Trade Application' form on our website under the 'About' drop-down menu. Alternatively you can request a physical copy of the form from our Head Office in Stockport.

Head Office - Stockport Northern Sales, Distribution Centre & Production Warehouse

The Door Centre
Discovery Park
Crossley Road
Stockport
Cheshire
SK4 5BW

Scan me to
find location



0161 432 6655



sales@indupart.co.uk

Only our Head Office offers:

Cheque payments
Trade application form submission
In person card payments

Should you have any queries regarding payment for your goods,
please call your local Regional Distribution Centre.



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk

Depot Map



Depot Addresses

1

Northern Sales, Distribution Centre & Production Warehouse

The Door Centre
Discovery Park
Crossley Road
Stockport
Cheshire
SK4 5BW

 0161 432 6655

 0161 432 6400

Scan me to
find location



2

South Eastern Distribution Centre

The Door Centre
Unit 10
Eastman Way
Hemel Hempstead
Herts
HP2 7DU

 01442 258653

 01442 256349

Scan me to
find location



3

South Western Distribution Centre

The Door Centre
Unit 10
Douglas Road Industrial Park
Kingswood
Avon
BS15 8PD

 0117 967 4408

 0117 967 4426

Scan me to
find location



4

Scotland Distribution Centre

The Door Centre
1 Coltness Lane
Queenslie Industrial Estate
Queenslie
Glasgow
G33 4DR

 0141 774 8314

 0141 774 8354

Scan me to
find location



How To Order

1

To begin an order, you will need to contact your nearest Regional Sales Centre and speak to one of our experienced and professional staff.



2

They will then let you know whether the part you require is in stock or how quickly an un-stocked item can be sourced and delivered.



3

Your order should then be emailed or faxed to the Centre so it can be actioned as soon as possible.



4

You will receive a written confirmation from our team.

Delivery Options



Collection

You have the option to collect your order from any of our four Regional Distributions Centres (please see previous 2 pages for the locations of our Regional Distribution Centres.)



Post

For one or a few small items, Indupart can organise for them to be sent by 'registered' post. The cost for this will be detailed in the written confirmation of your order.



Carrier

Items no greater than 6100mm in length can be sent through our next day, pre 10:30am or pre 12:00pm delivery service. Please note: This service does not include Sectional Door panel deliveries.



Indupart Deliver

Delivery can be arranged through Indupart's own dedicated transport. Please contact your Regional Sales Centre for full details.



FAQs ?



How do I order a part?

We only supply to the door trade (not the end user). To order your parts call or email our experienced sales team: 0161 432 6655 | sales@indupart.co.uk
Please note: All finalised orders must be in writing.



I have a code on my cable drums that doesn't match your part numbers?

Please contact one of our team to find out which of our cable drums will be suitable as a replacement.



What is the difference between a high lift and a standard lift door?

The measurement from the top of the door to the top of the spring beam on a standard lift door is around 500mm.



What are the 'U-Values' of your Kingspan panels?

80mm 0.54 W/m² K/40mm 0.51 W/m² K



I have a door panel but I don't know what type it is?


The easiest way to identify any type of door panel is to send a photograph to sales@indupart.co.uk



How do I hand a door spring?

Spring 'A' is a left hand wound spring.
LHW: wound anti-clockwise

Spring 'B' is a right hand spring.
RHW: wound clockwise

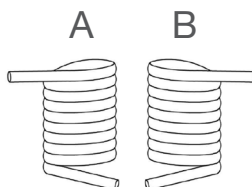

Did you know?

Indupart has it's own youtube channel with helpful videos



www.youtube.com/Indupart

You can book industrial door training at Indupart Training



www.induparttraining.co.uk

You can find technical information about any of our parts on our website

 indupart.co.uk

If you have any more questions please get in touch:

0161 432 6655 | sales@indupart.co.uk



0161 432 6655



sales@indupart.co.uk



www.indupart.co.uk



The UK's leading supplier of
Industrial Doors & Door Components

Northern Sales, Distribution Centre & Production Warehouse

The Door Centre
Discovery Park
Crossley Road
Stockport
Cheshire
SK4 5BW

Scan me to
find location



 0161 432 6655
 0161 432 6400

South Eastern Distribution Centre

The Door Centre
Unit 10
Eastman Way
Hemel Hempstead
Herts
HP2 7DU

Scan me to
find location



 01442 258653
 01442 256349

South Western Distribution Centre

The Door Centre
Unit 10
Douglas Road Industrial Park
Kingswood
Avon
BS15 8PD

Scan me to
find location



 0117 967 4408
 0117 967 4426

Scotland Distribution Centre

The Door Centre
1 Coltness Lane
Queenslie Industrial Estate
Queenslie
Glasgow
G33 4DR

Scan me to
find location



 0141 774 8314
 0141 774 8354



Designed by Create 8
www.Create8.co.uk

© Indupart 2018

Errors and omissions excepted (E&OE)

 0161 432 6655

 sales@indupart.co.uk

 www.indupart.co.uk